

NEWFIELD



November 18, 2004

State of Utah  
Division of Oil, Gas & Mining  
Attn: Diana Whitney  
1594 West North Temple - Suite 1210  
P.O. Box 145801  
Salt Lake City, Utah 84114-5801

RE: Applications for Permit to Drill: Federal 1-8-9-18, 2-8-9-18, 3-8-9-18, 5-8-9-18, 6-8-9-18, 10-8-9-18, 13-8-9-18, 14-8-9-18, and 16-8-9-18.

Dear Diana:

Enclosed find APD's on the above referenced wells. If you have any questions, feel free to give either Brad or myself a call.

Sincerely,

A handwritten signature in black ink that reads "Mandie Crozier".

Mandie Crozier  
Regulatory Specialist

mc  
enclosures

RECEIVED

NOV 22 2004

DIV. OF OIL, GAS & MINING

001

Form 3160-3  
(September 2001)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED  
OMB No. 1004-0136  
Expires January 31, 2004

5. Lease Serial No.  
UTU-16540

6. If Indian, Allottee or Tribe Name  
N/A

7. If Unit or CA Agreement, Name and No.  
N/A

8. Lease Name and Well No.  
Federal 2-8-9-18

9. API Well No.  
43-047-36115

10. Field and Pool, or Exploratory  
Eight Mile Flat

11. Sec., T., R., M., or Blk. and Survey or Area  
NW/NE Sec. 8, T9S R18E

12. County or Parish  
Uintah

13. State  
UT

1a. Type of Work:  DRILL  REENTER

1b. Type of Well:  Oil Well  Gas Well  Other  Single Zone  Multiple Zone

2. Name of Operator  
Newfield Production Company

3a. Address  
Route #3 Box 3630, Myton UT 84052

3b. Phone No. (include area code)  
(435) 646-3721

4. Location of Well (Report location clearly and in accordance with any State requirements. \*)

At surface NW/NE 660' FNL 1980' FEL 592603Y 40.050859  
At proposed prod. zone 4433757Y -109.914378

14. Distance in miles and direction from nearest town or post office\*  
Approximatley 19.3 miles southeast of Myton, Utah

15. Distance from proposed\* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 1980' f/lse, NA f/unit

16. No. of Acres in lease  
1436.44

17. Spacing Unit dedicated to this well  
40 Acres

18. Distance from proposed location\* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1,326'

19. Proposed Depth  
5980'

20. BLM/BIA Bond No. on file  
UTU0056

21. Elevations (Show whether DF, KDB, RT, GL, etc.)  
5003' GL

22. Approximate date work will start\*  
2nd Quarter 2005

23. Estimated duration  
Approximately seven (7) days from spud to rig release.

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).

- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature *Mandie Crozier*  
Title Regulatory Specialist

Name (Printed/Typed)  
Mandie Crozier

Date  
11/18/04

Approved by (Signature) *Bradley G. Hill*  
Title

BRADLEY G. HILL  
ENVIRONMENTAL SCIENTIST III

Name (Printed/Typed)

RECEIVED  
NOV 22 2004 Date 11-29-04

DIV. OF OIL, GAS & MINING

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



\*(Instructions on reverse)

Federal Approval of this  
Action is Necessary

# T9S, R18E, S.L.B.&M.

## INLAND PRODUCTION COMPANY

WELL LOCATION, FEDERAL 2-8-9-18,  
 LOCATED AS SHOWN IN THE NW 1/4 NE  
 1/4 OF SECTION 8, T9S, R18E, S.L.B.&M.  
 Uintah County, Utah.

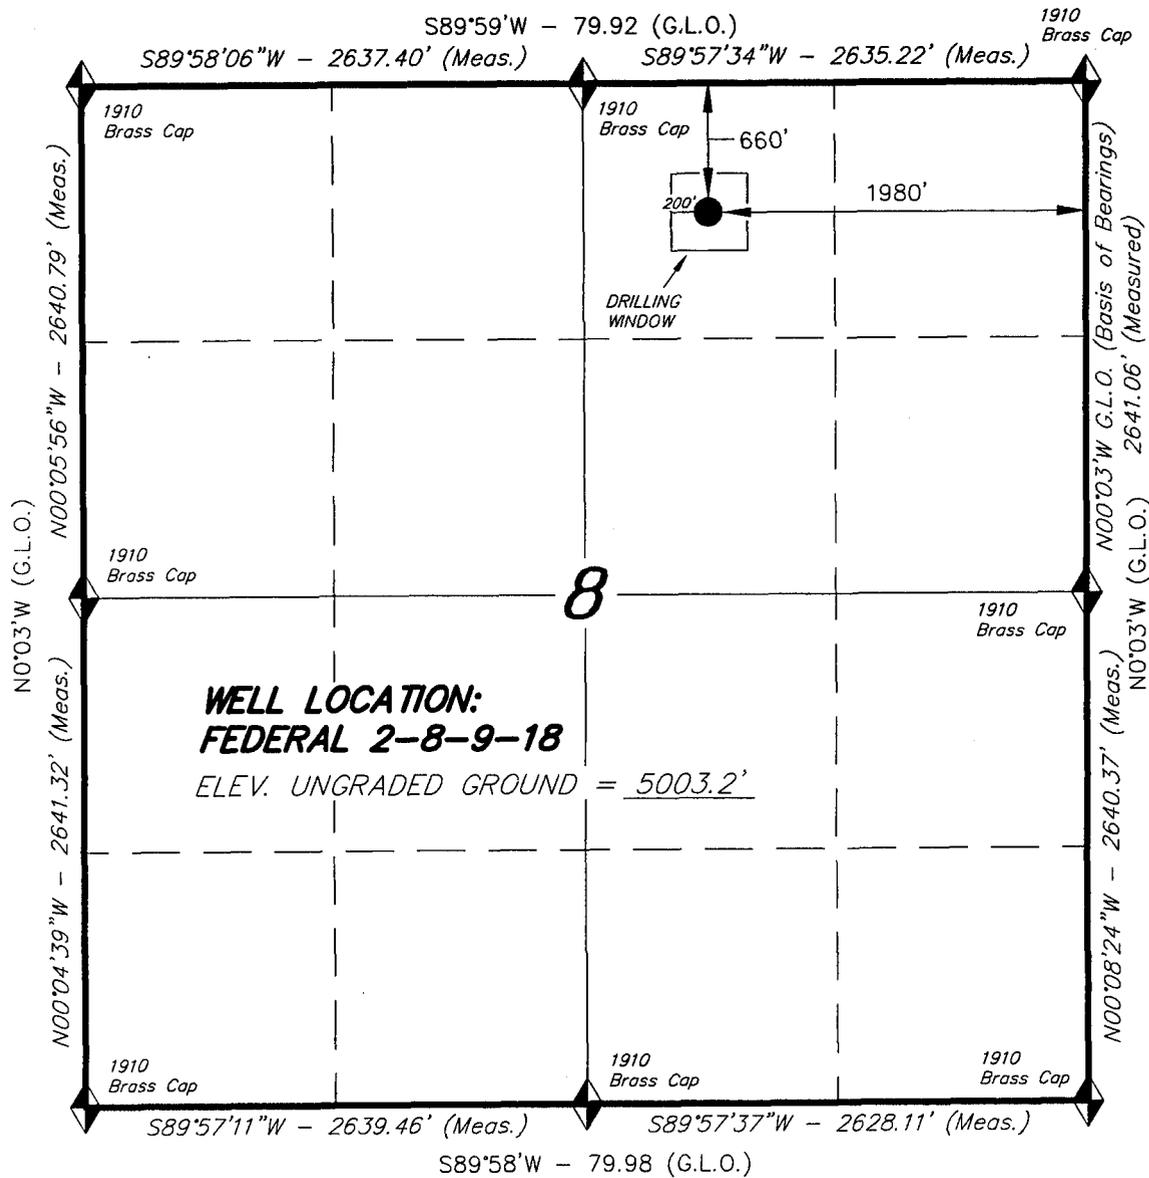

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS  
 PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS  
 MADE BY ME OR UNDER MY SUPERVISION AND THAT  
 THE SAME ARE TRUE AND CORRECT TO THE BEST OF  
 MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR  
 No. 189377  
 STACY W. STEWART  
 REGISTERED LAND SURVEYOR  
 REGISTRATION No. 189377  
 STATE OF UTAH

**TRI STATE LAND SURVEYING & CONSULTING**  
 180 NORTH VERNAL AVE. - VERNAL, UTAH 84078  
 (435) 781-2501

SCALE: 1" = 1000'	SURVEYED BY: K.G.S.
DATE: 6-9-04	DRAWN BY: F.T.M.
NOTES:	FILE #

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; U.S.G.S. 7-1/2 min QUAD (PARIETTE DRAW SW)

NEWFIELD PRODUCTION COMPANY  
FEDERAL #2-8-9-18  
NW/NE SECTION 8, T9S, R18E  
UINTAH COUNTY, UTAH

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta	0' – 1640'
Green River	2150'
Wasatch	5980'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation 2150' – 5980' - Oil

4. PROPOSED CASING PROGRAM

Please refer to the Monument Butte Field Standard Operation Procedure (SOP).

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Please refer to the Monument Butte Field SOP. See Exhibit "C".

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

Please refer to the Monument Butte Field SOP.

7. AUXILIARY SAFETY EQUIPMENT TO BE USED:

Please refer to the Monument Butte Field SOP.

8. TESTING, LOGGING AND CORING PROGRAMS:

Please refer to the Monument Butte Field SOP.

9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

The anticipated maximum bottom hole pressure is 1800 psi. It is not anticipated that abnormal temperatures will be encountered.

10. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:

Please refer to the Monument Butte Field SOP.

NEWFIELD PRODUCTION COMPANY  
FEDERAL #2-8-9-18  
NW/NE SECTION 8, T9S, R18E  
UINTAH COUNTY, UTAH

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Federal #2-8-9-18 located in the NW 1/4 NE 1/4 Section 8, T9S, R18E, Uintah County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.6 miles ± to the junction of this highway and UT State Hwy 53; proceed southeasterly along Hwy 53 - 11.7 miles ± to it's junction with an existing dirt road to the southeast; proceed southeasterly - 3.6 miles ± to it's junction with an existing road to the northeast; proceed northeasterly - 1.4 miles ± to it's junction with an existing road to the northeast; proceed northeasterly - 1.0 miles ± to it's junction with the beginning of the proposed access road; proceed along the proposed access road 615' ± to the proposed well location.

2. PLANNED ACCESS ROAD

See Topographic Map "B" for the location of the proposed access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

Please refer to the Monument Butte Field Standard Operating Procedure (SOP).

5. LOCATION AND TYPE OF WATER SUPPLY

Please refer to the Monument Butte Field SOP. See Exhibit "A".

6. SOURCE OF CONSTRUCTION MATERIALS

Please refer to the Monument Butte Field SOP.

7. METHODS FOR HANDLING WASTE DISPOSAL

Please refer to the Monument Butte Field SOP.

8. ANCILLARY FACILITIES

Please refer to the Monument Butte Field SOP.

9. WELL SITE LAYOUT

See attached Location Layout Diagram.

10. PLANS FOR RESTORATION OF SURFACE

Please refer to the Monument Butte Field SOP.

11. SURFACE OWNERSHIP - Bureau Of Land Management

12. OTHER ADDITIONAL INFORMATION

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #01-130, 9/10/04. Paleontological Resource Survey prepared by, Wade E. Miller, 7/9/04. See attached report cover pages, Exhibit "D".

For the Federal #2-8-9-18 Newfield Production Company requests 615' of disturbed area be granted in Lease UTU-16540 to allow for construction of the proposed access road. **Refer to Topographic Map "B"**. The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Newfield Production Company requests 615' of disturbed area be granted in Lease UTU-16540 to allow for construction of the proposed gas lines. It is proposed that the disturbed area will be 50' wide to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line. Both lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** For a ROW plan of development, please refer to the Monument Butte Field SOP.

**Water Disposal**

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

**Threatened, Endangered, And Other Sensitive Species**

**Mountain Plover:** If new construction or surface disturbing activities are scheduled to occur between May 1 and June 15, detailed surveys of the area within 0.5 mile of the proposed location and within 300 feet of proposed access routes must be conducted to detect the presence of mountain plovers. All surveys must be conducted in accordance with the survey protocols outlined in the most recent USFWS Survey Protocol. Surveys must be completed prior to initiating new construction or surface disturbing activities. No new construction or surface disturbing activities will be allowed between March 15 and August 15 within a 0.5 mile radius of any documented mountain plover nest site.

**Burrowing Owl:** Due to the proximity of the location to active prairie dog towns, there is the potential to encounter nesting burrowing owls between April 1 and August 15. If new construction or surface disturbing activities are scheduled between April 1 and August 15, pre-construction surveys will be conducted to detect the presence of nesting burrowing owls within 0.5 mile of any new construction or surface disturbing activity (see Vernal BLM Field Office Protocol). No new construction or surface disturbing activities will be allowed between April 1 and August 15 within a 0.5 mile radius of any active burrowing owl nest.

**Reserve Pit Liner**

Please refer to the Monument Butte Field SOP.

**Location and Reserve Pit Reclamation**

Please refer to the Monument Butte Field SOP.

The following seed mixture will be used on the topsoil stockpile, to the recontoured surface of the reserve pit, and for final reclamation: (All poundages are in pure live seed)

Shadscale	<i>Atriplex confertifolia</i>	4 lbs/acre
Scarlet globmallow	<i>Sphaeralcea concineae</i>	4 lbs/acre
Crested Wheatgrass		4 lbs/acre

**Details of the On-Site Inspection**

The proposed Federal #2-8-9-18 was on-sited on 4/14/04. The following were present; Brad Mecham (Newfield Production), David Gerbig (Newfield Production), Byron Tolman (Bureau of Land Management), and a SWCA representative. Weather conditions were clear at 60 degrees.

**13. LESSEE'S OR OPERATORS REPRESENTATIVE AND CERTIFICATION**

Representative

Name: Brad Mecham

Address: Route #3 Box 3630  
Myton, UT 84052

Telephone: (435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #2-8-9-18 NW/NE Section 8, Township 9S, Range 18E: Lease UTU-16540 Uintah County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Hartford Accident #4488944.

I hereby certify that the proposed drillsite and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.



11/18/04  
Date

  
Mandie Crozier  
Regulatory Specialist  
Newfield Production Company

# INLAND PRODUCTION COMPANY

FEDERAL 2-8-9-18

Section 8, T9S, R18E, S.L.B.&M.

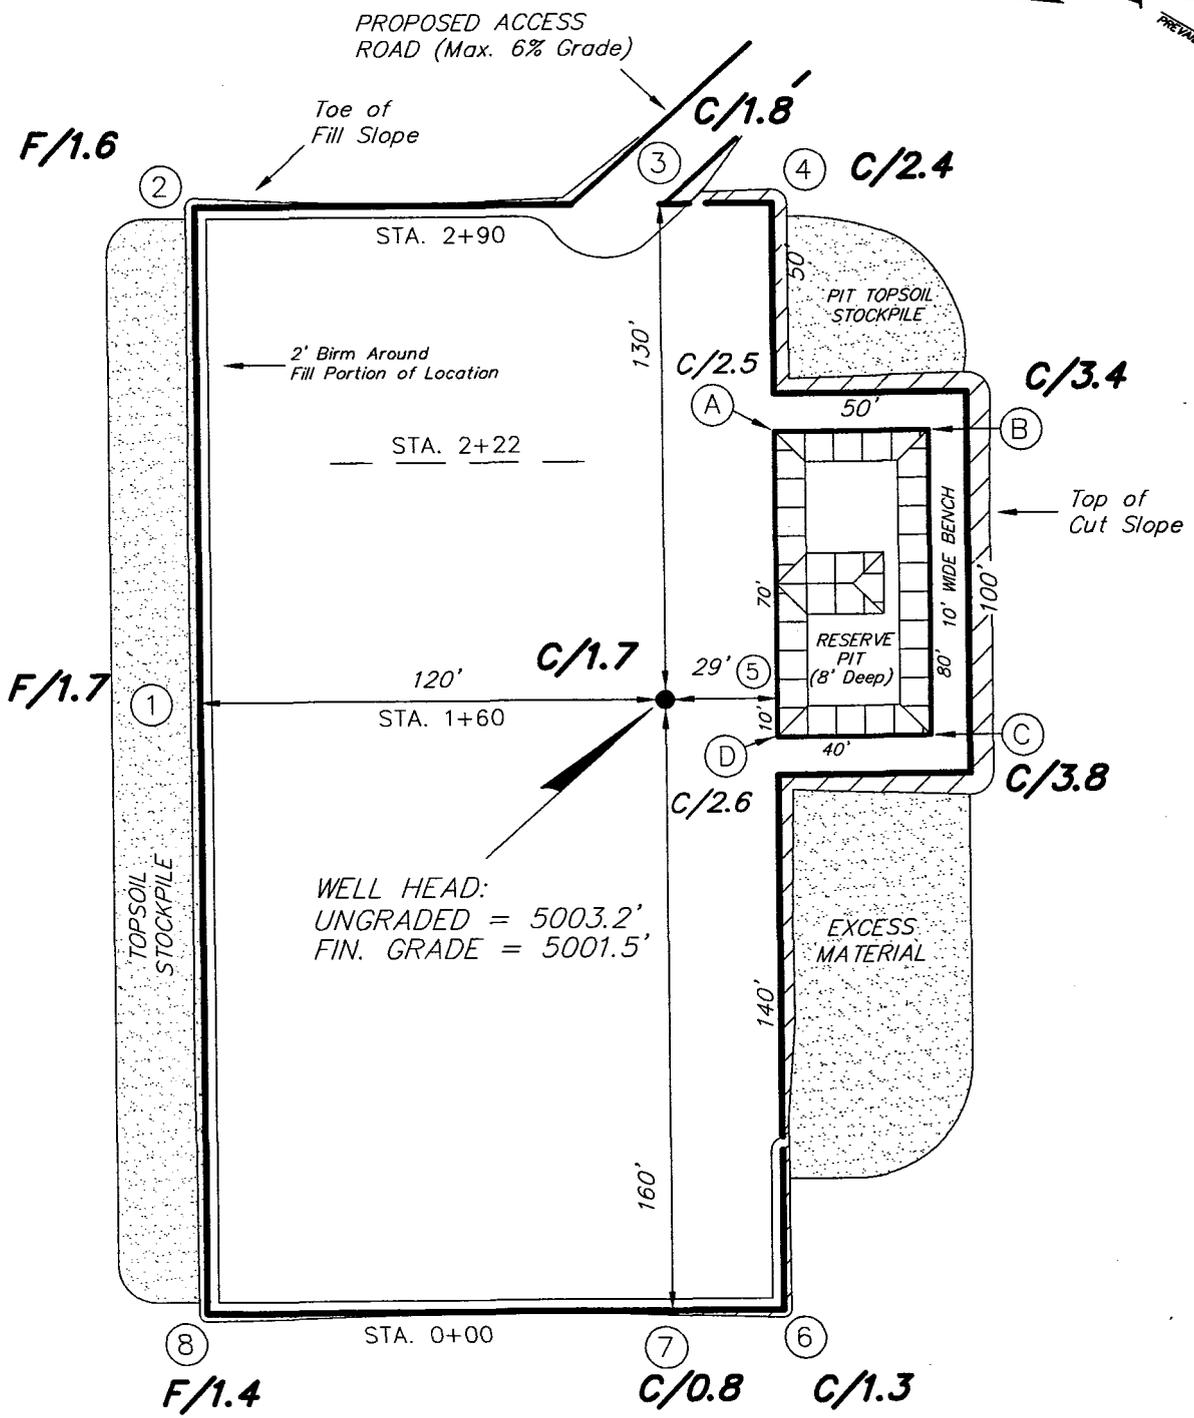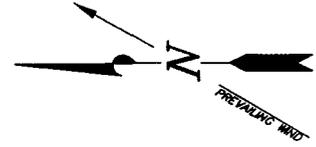





**REFERENCE POINTS**  
 170' NORTH = 4998.8'  
 220' NORTH = 4998.0'

SURVEYED BY: K.G.S.	SCALE: 1" = 50'	<b>Tri State</b> Land Surveying, Inc. 180 NORTH VERNAL AVE. VERNAL, UTAH 84078 (435) 781-2501
DRAWN BY: F.T.M.	DATE: 6-9-04	

# INLAND PRODUCTION COMPANY

## CROSS SECTIONS

FEDERAL 2-8-9-18

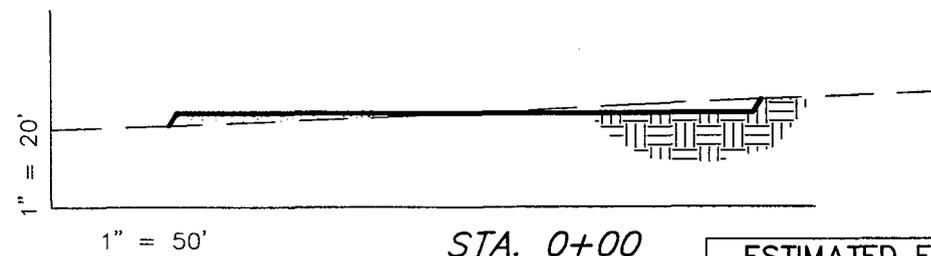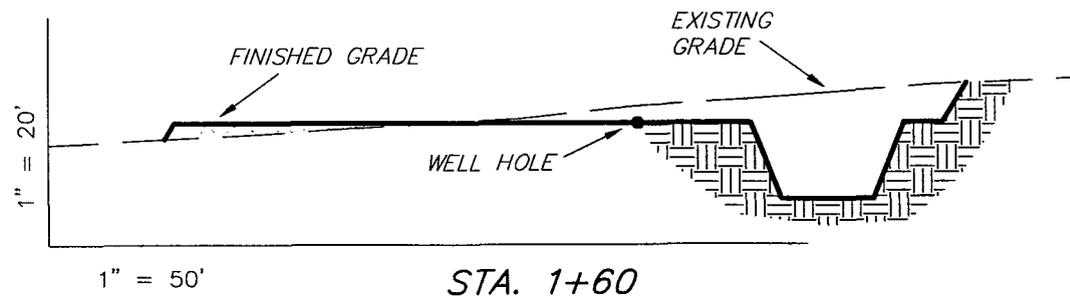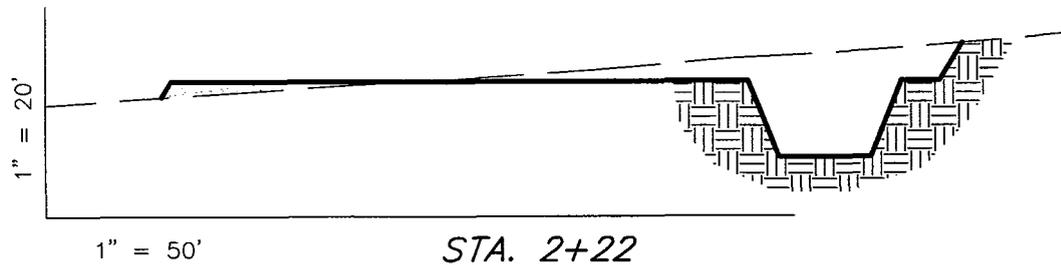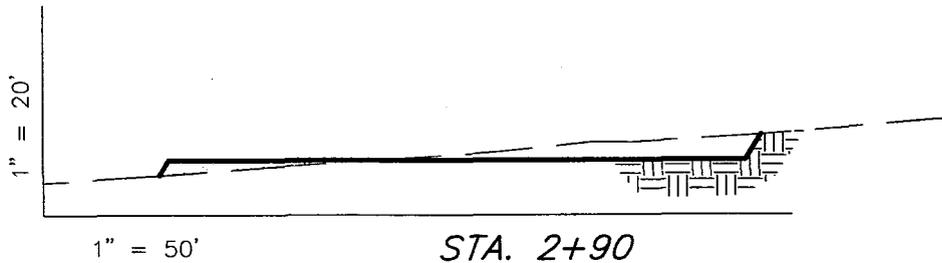

NOTE:  
UNLESS OTHERWISE NOTED  
ALL CUT/FILL SLOPES ARE  
AT 1.5:1

### ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	1,090	1,090	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	1,730	1,090	890	640

SURVEYED BY: K.G.S.

SCALE: 1" = 50'

DRAWN BY: F.T.M.

DATE: 6-9-04


**Tri State** (435) 781-2501  
Land Surveying, Inc.  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

# INLAND PRODUCTION COMPANY

## TYPICAL RIG LAYOUT

### FEDERAL 2-8-9-18

PROPOSED ACCESS ROAD (Max. 6% Grade)

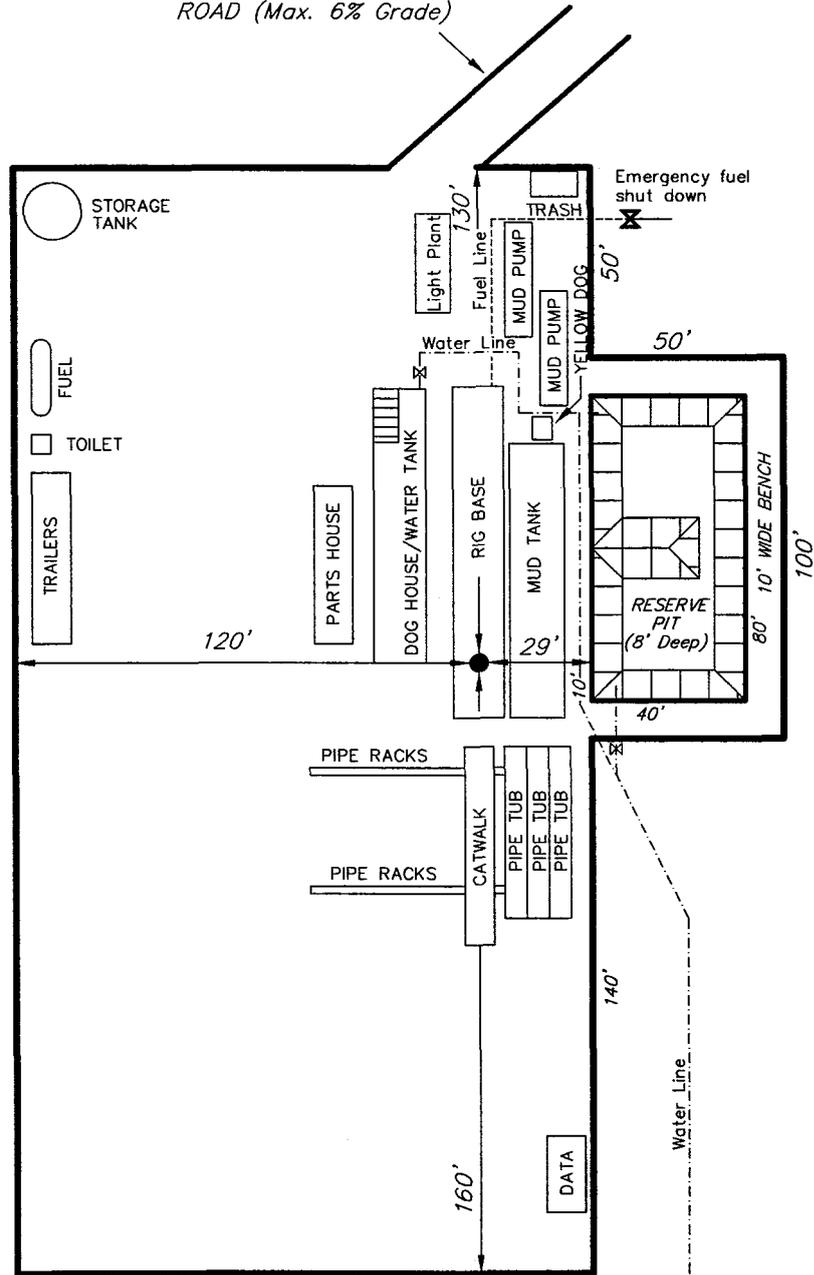

SURVEYED BY: K.G.S.

SCALE: 1" = 50'

DRAWN BY: F.T.M.

DATE: 6-9-04

Tri State  
Land Surveying, Inc. (435) 781-2501  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078



**Federal 2-8-9-18  
SEC. 8, T9S, R18E, S.L.B.&M.**




**Tri-State  
Land Surveying Inc.**  
(435) 781-2501  
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1 = 120,000  
DRAWN BY: bgm  
DATE: 06-19-2004

**Legend**

- Existing Road
- Proposed Access

TOPOGRAPHIC MAP  
**"A"**

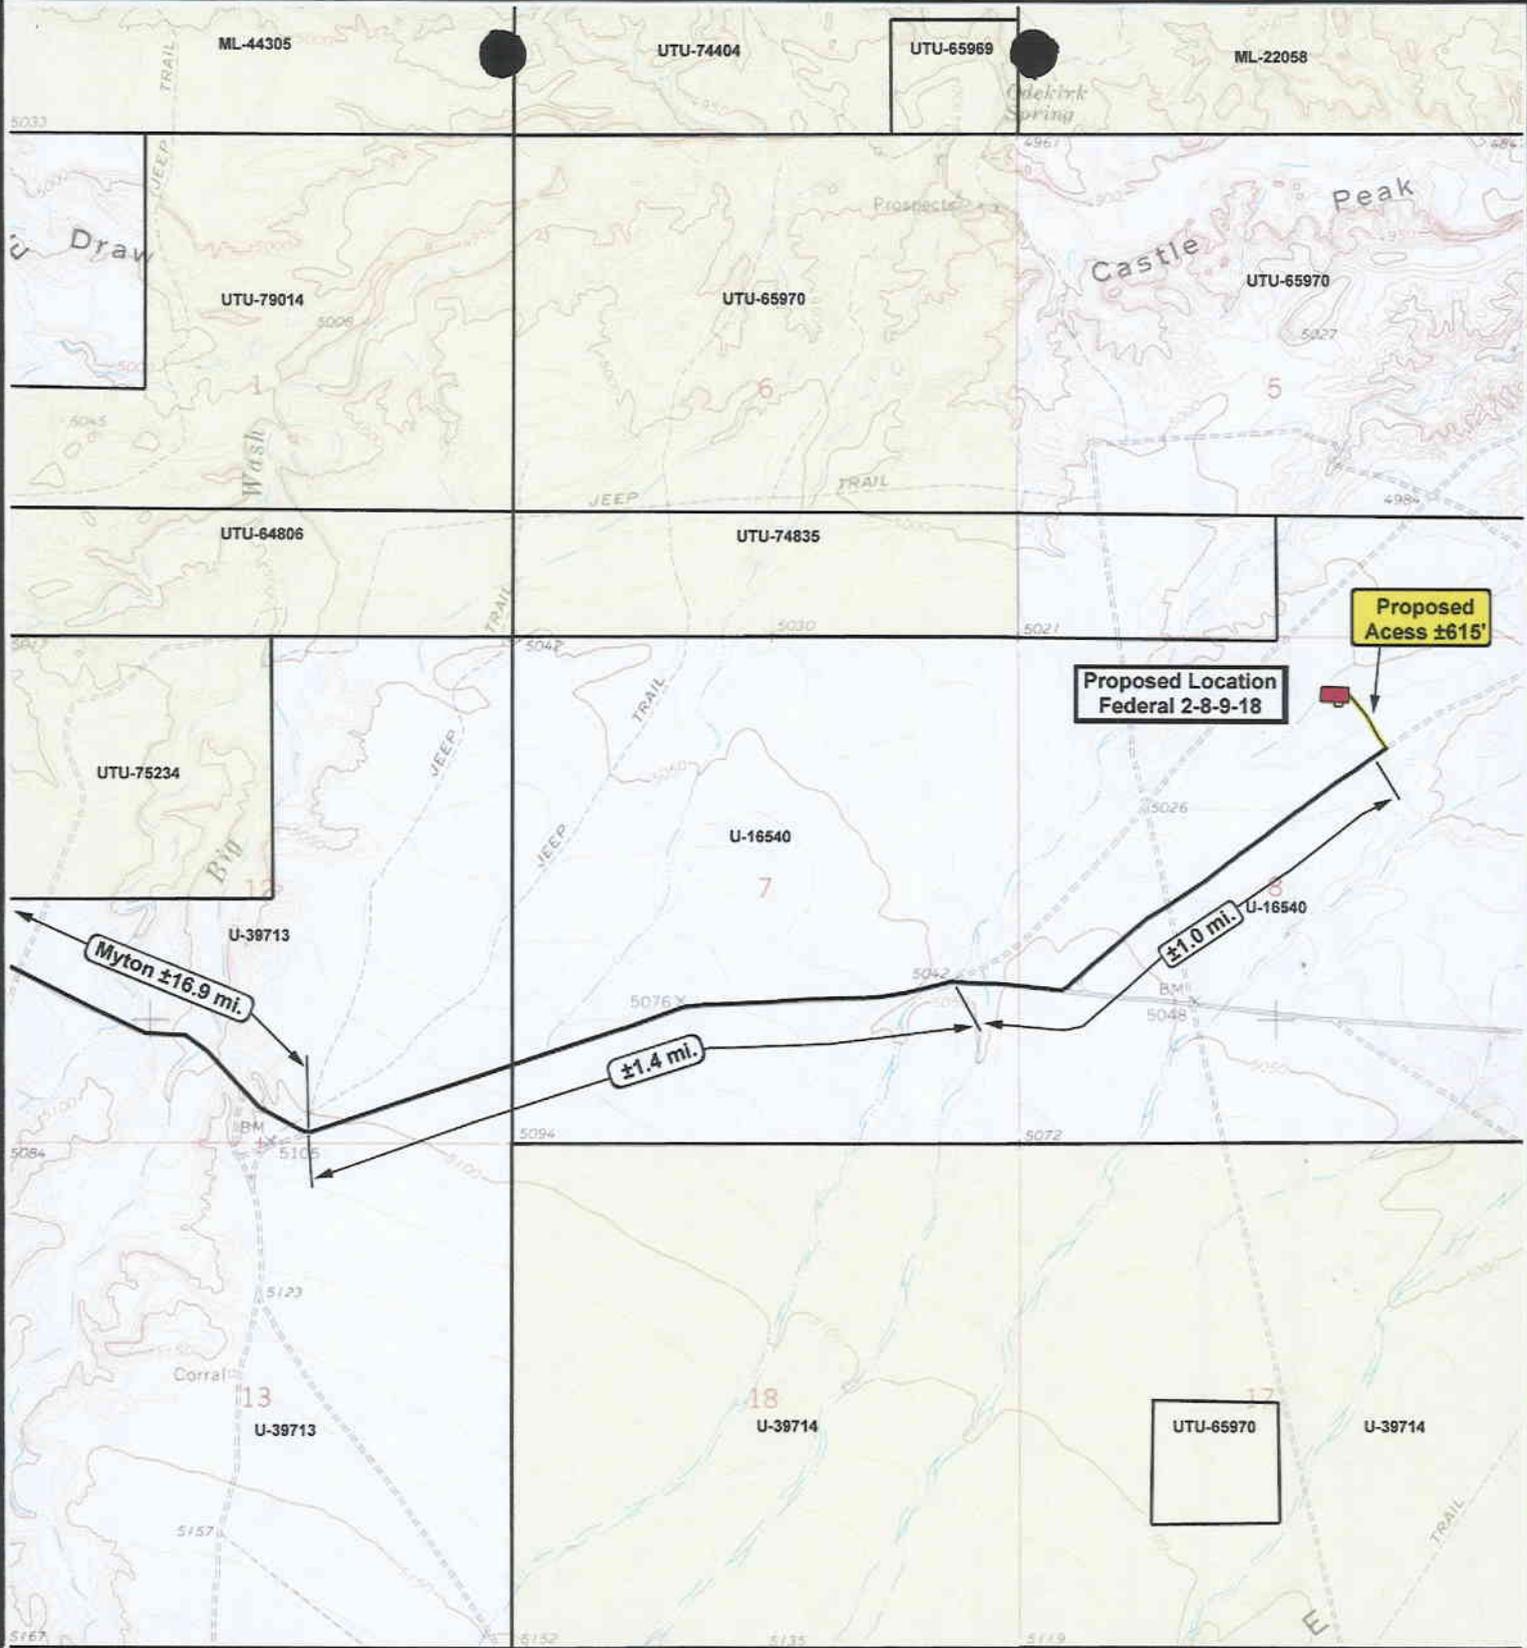

**Federal 2-8-9-18  
SEC. 8, T9S, R18E, S.L.B.&M.**




**Tri-State  
Land Surveying Inc.**  
(435) 781-2501  
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'  
DRAWN BY: bgm  
DATE: 06-16-2004

Legend	
	Existing Road
	Proposed Access

TOPOGRAPHIC MAP  
**"B"**

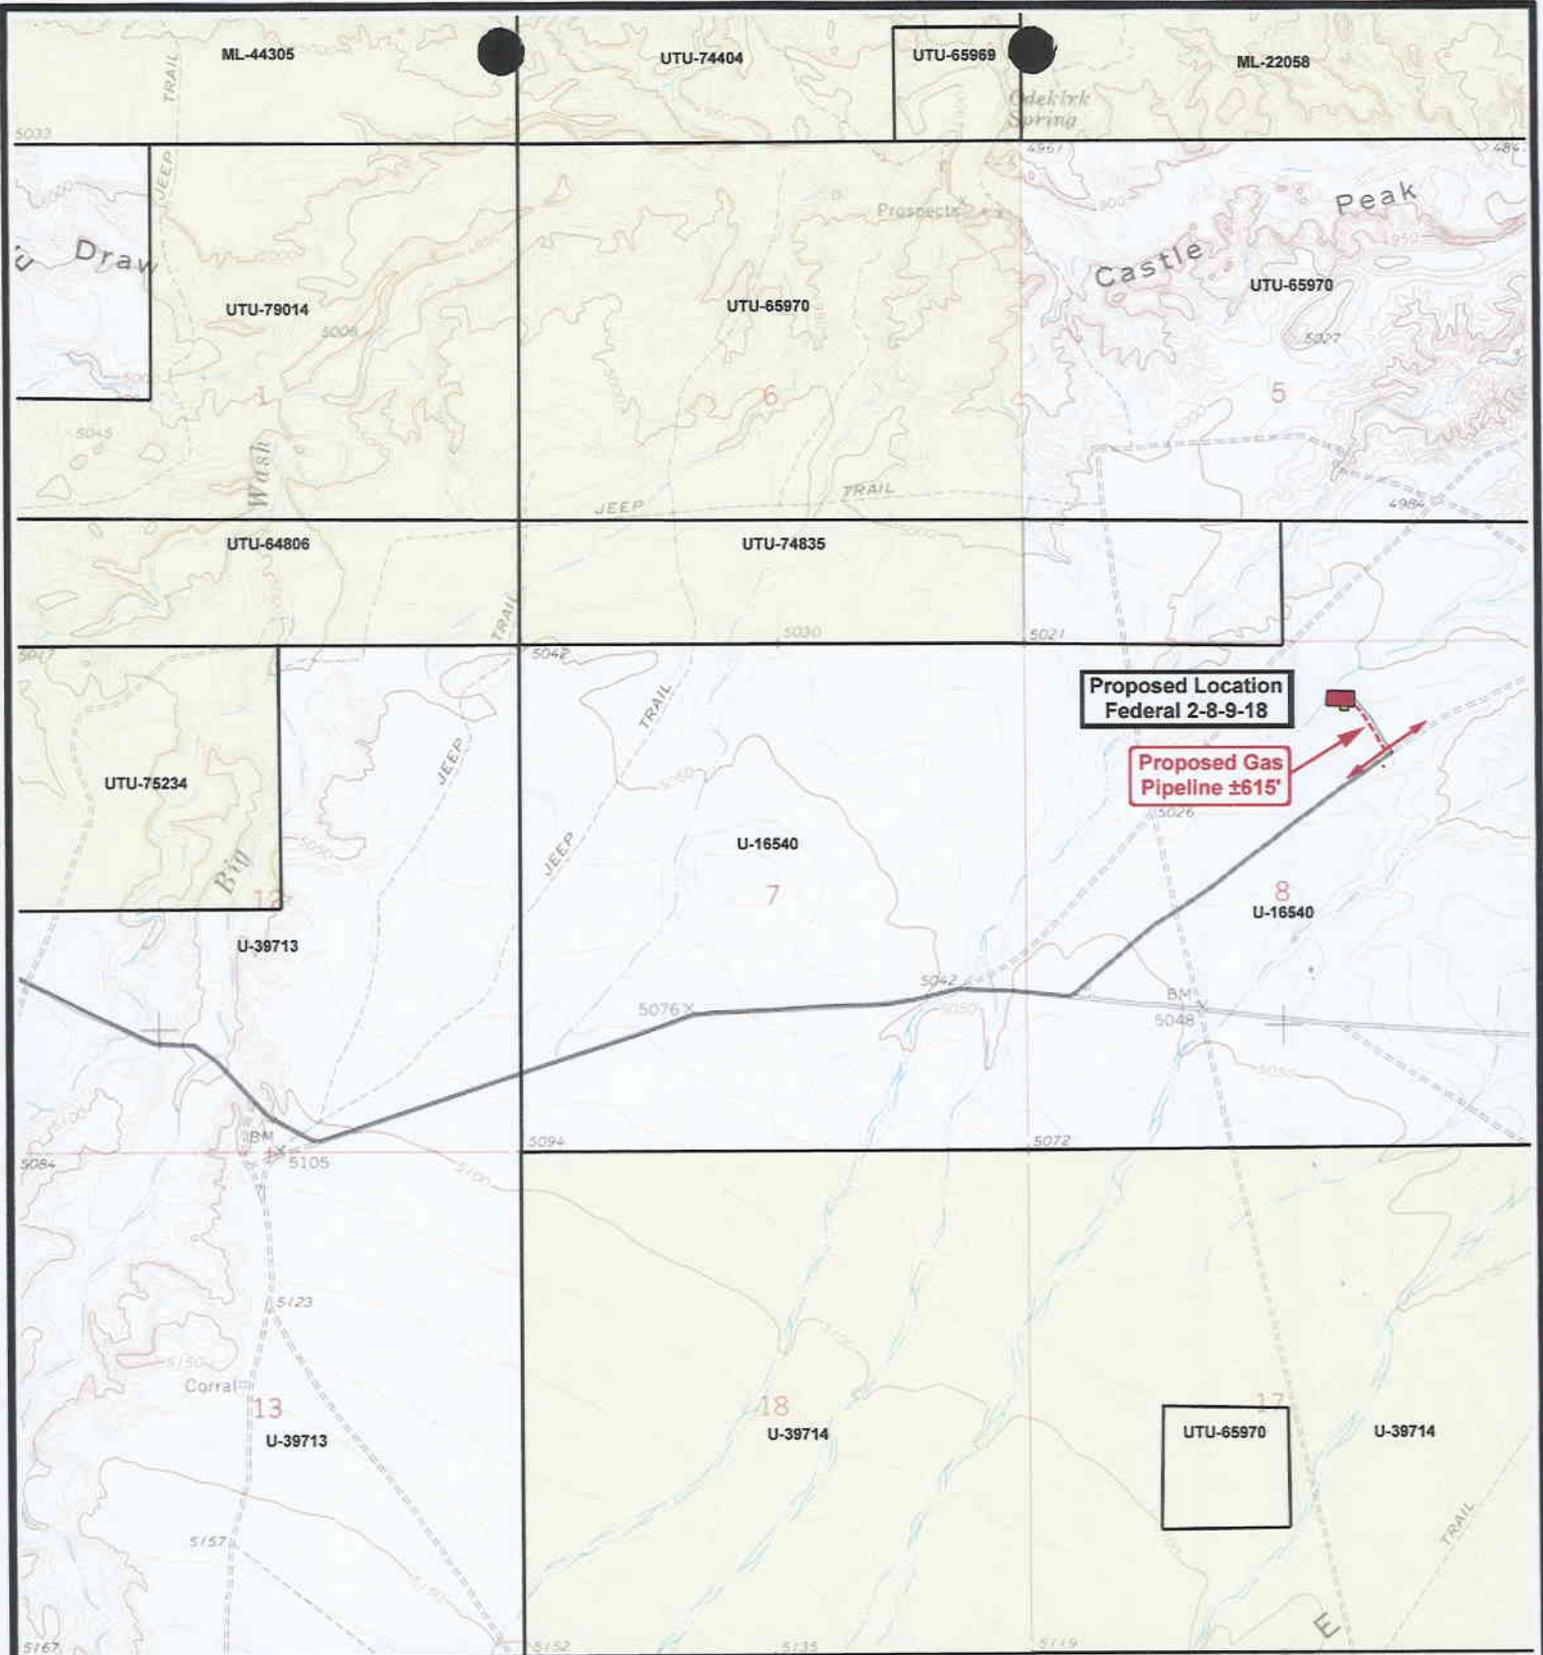

**Federal 2-8-9-18**  
**SEC. 8, T9S, R18E, S.L.B.&M.**




**Tri-State**  
*Land Surveying Inc.*  
 (435) 781-2501  
 180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1" = 2,000'  
 DRAWN BY: bgm  
 DATE: 06-16-2004

Legend	
	Roads
	Existing Gas Line
	Proposed Gas Line

TOPOGRAPHIC MAP

**"C"**

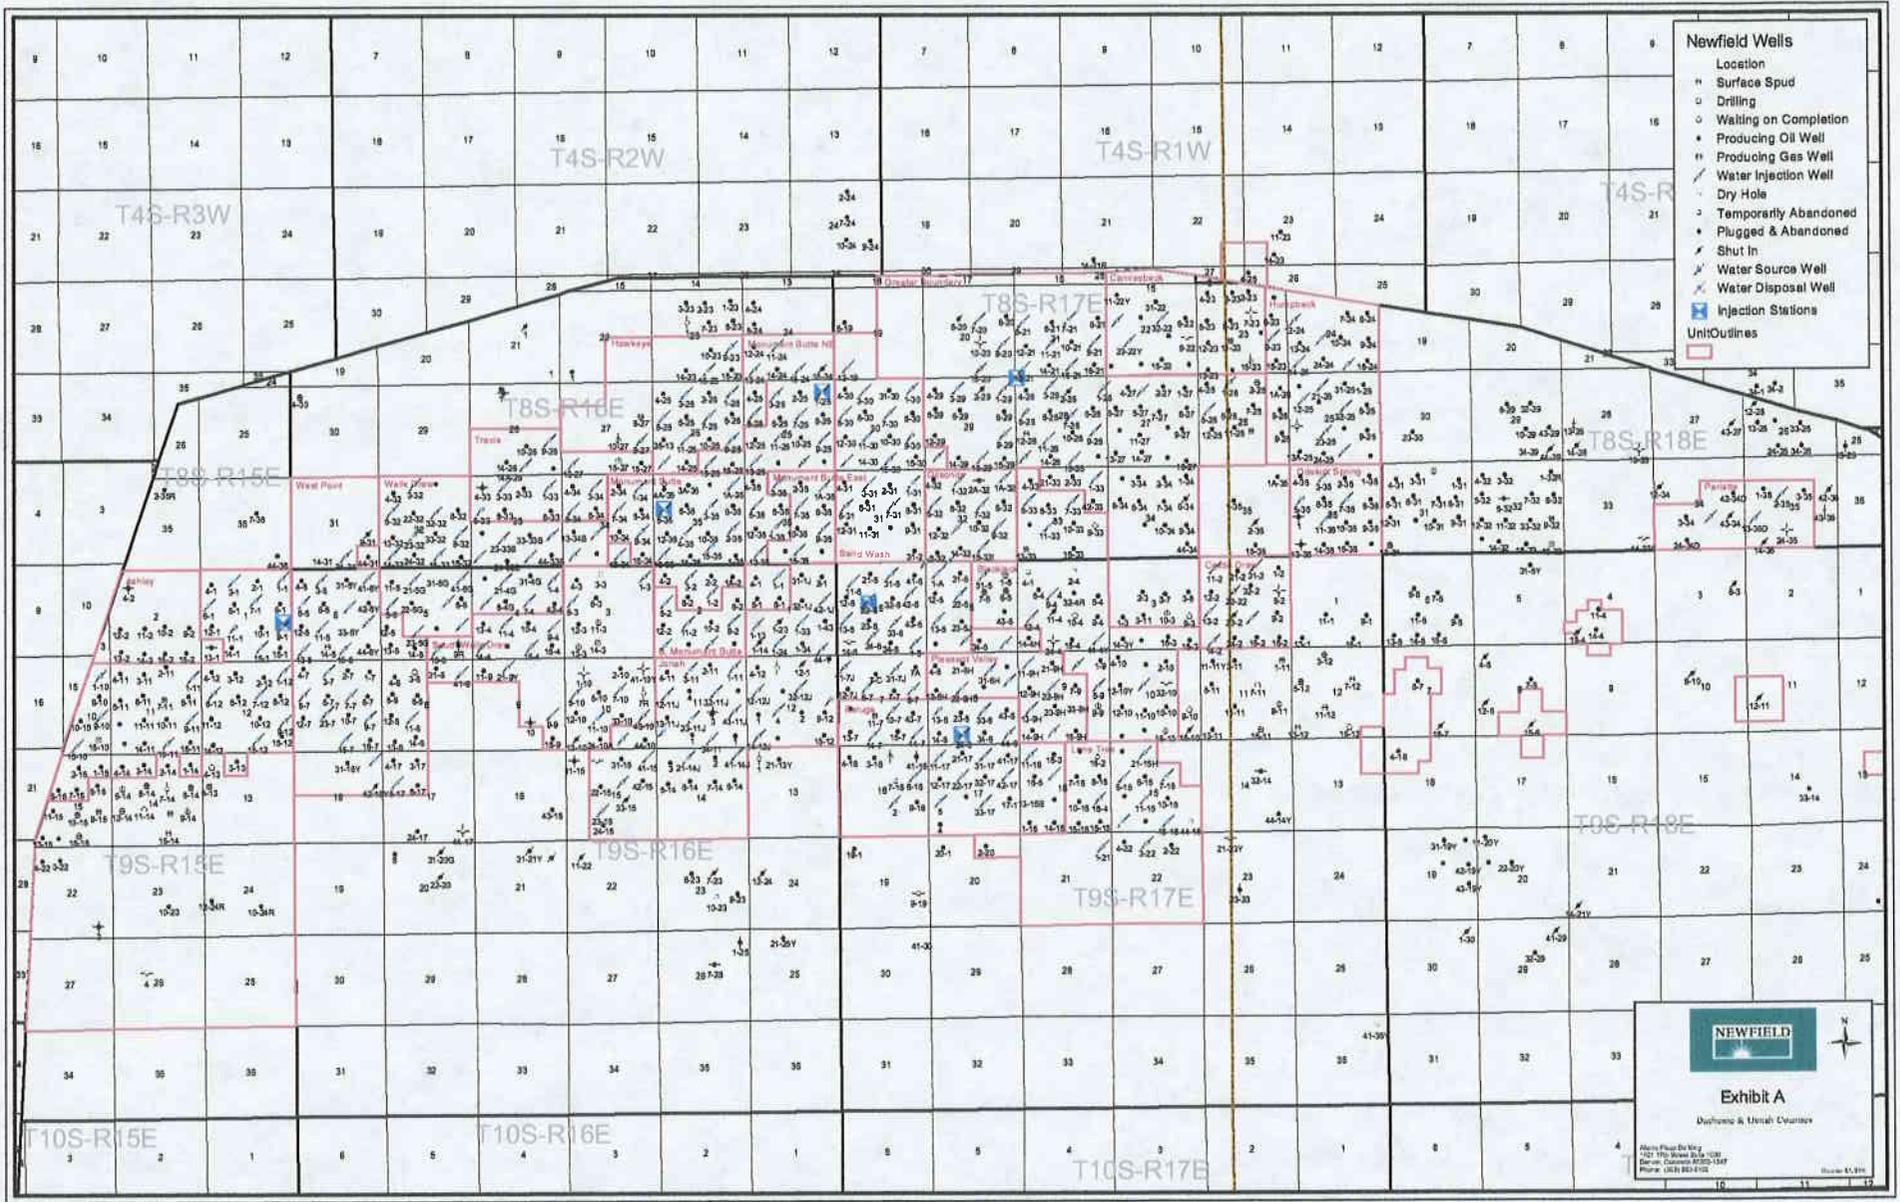

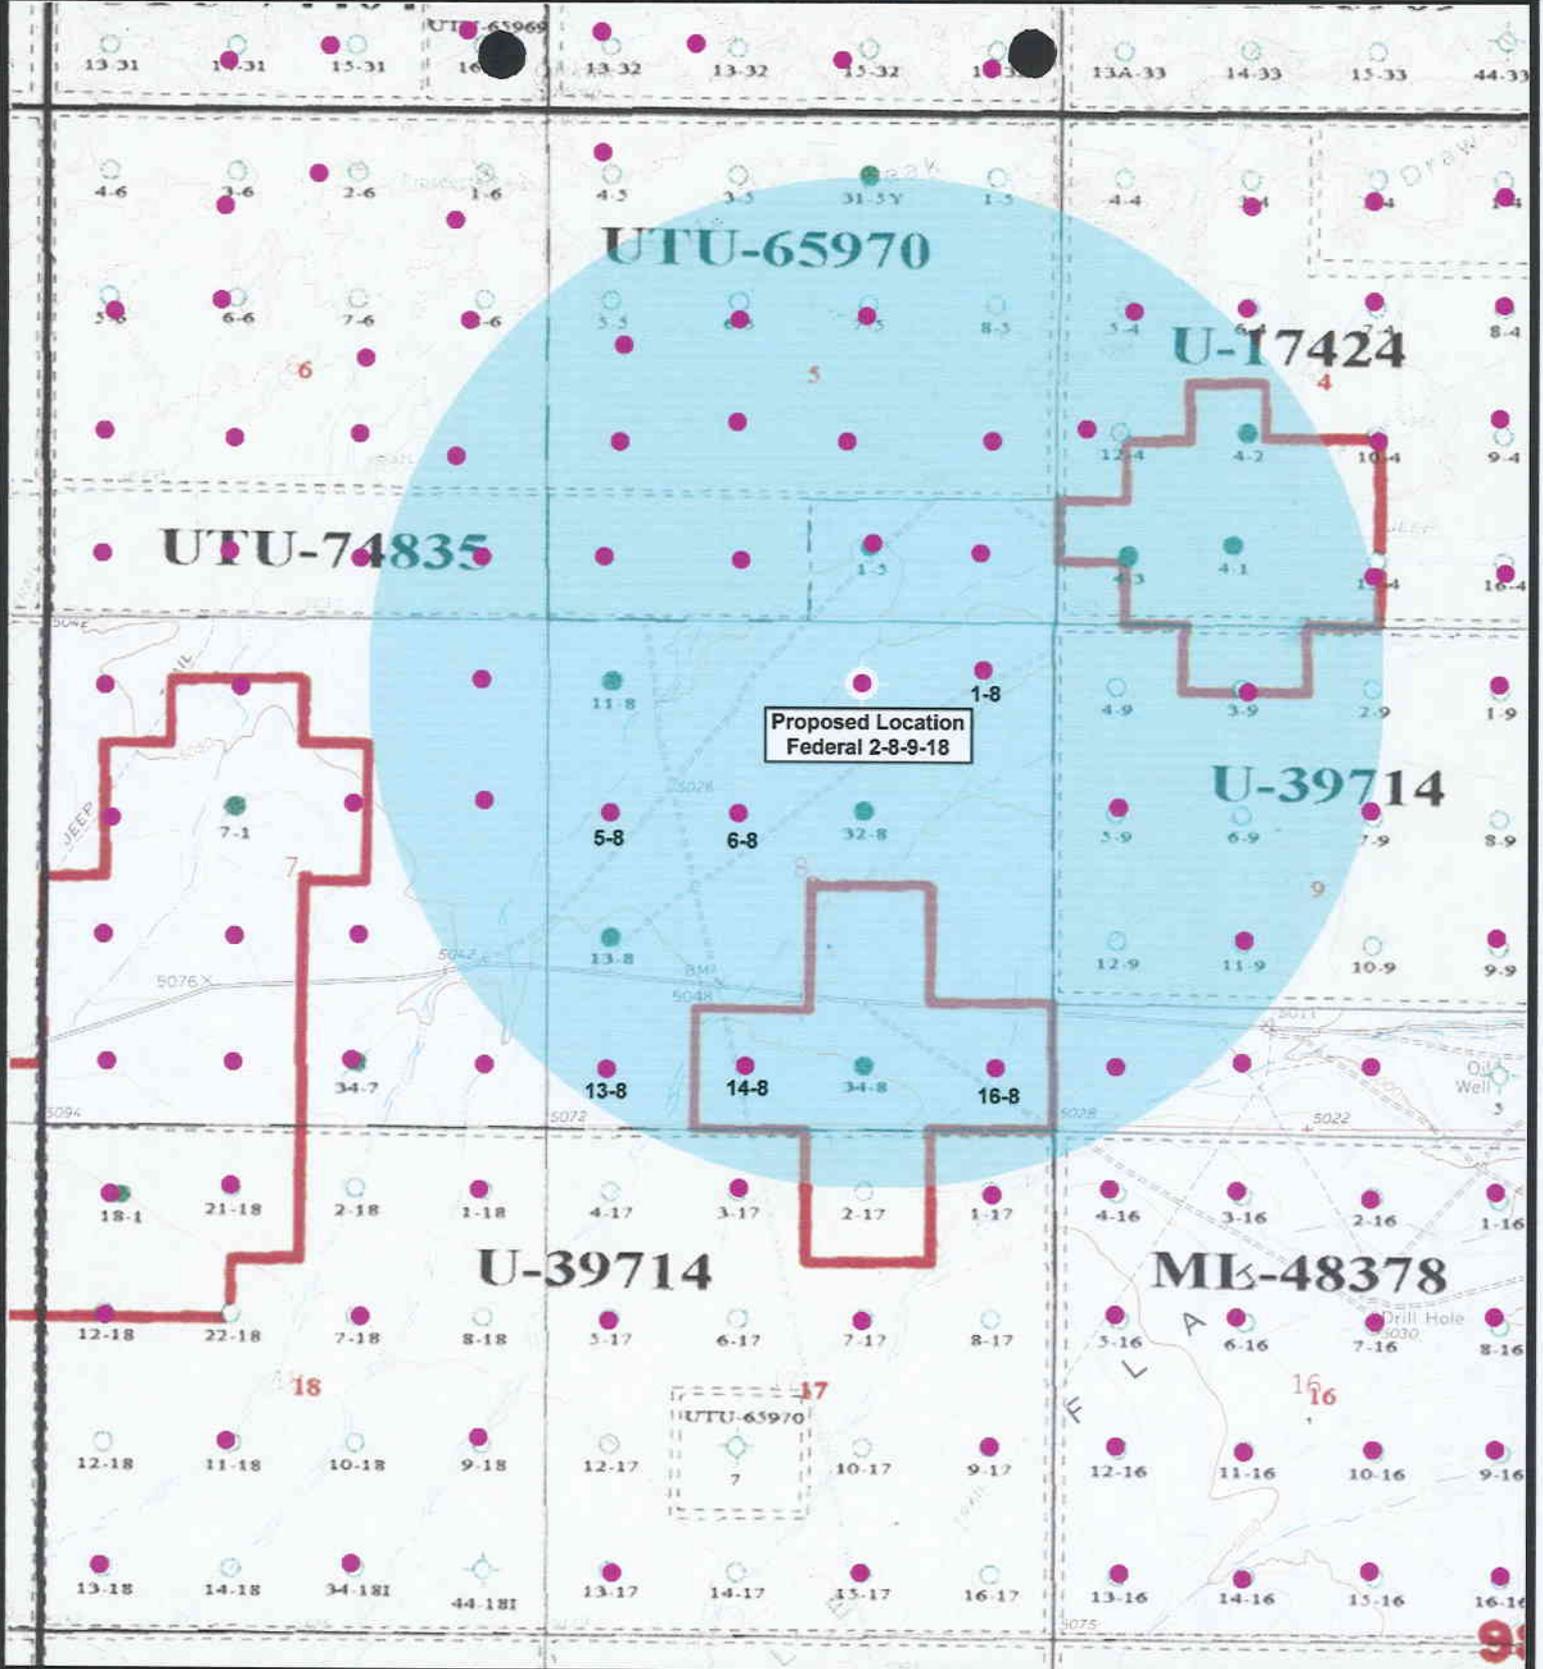

Proposed Location  
Federal 2-8-9-18



**Federal 2-8-9-18**  
**SEC. 8, T9S, R18E, S.L.B.&M.**



*Tri-State*  
*Land Surveying Inc.*  
(435) 781-2501  
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'  
DRAWN BY: bgm  
DATE: 06-14-2004

**Legend**

- Location
- One-Mile Radius

**Exhibit "B"**

# 2-M SYSTEM

Blowout Prevention Equipment Systems

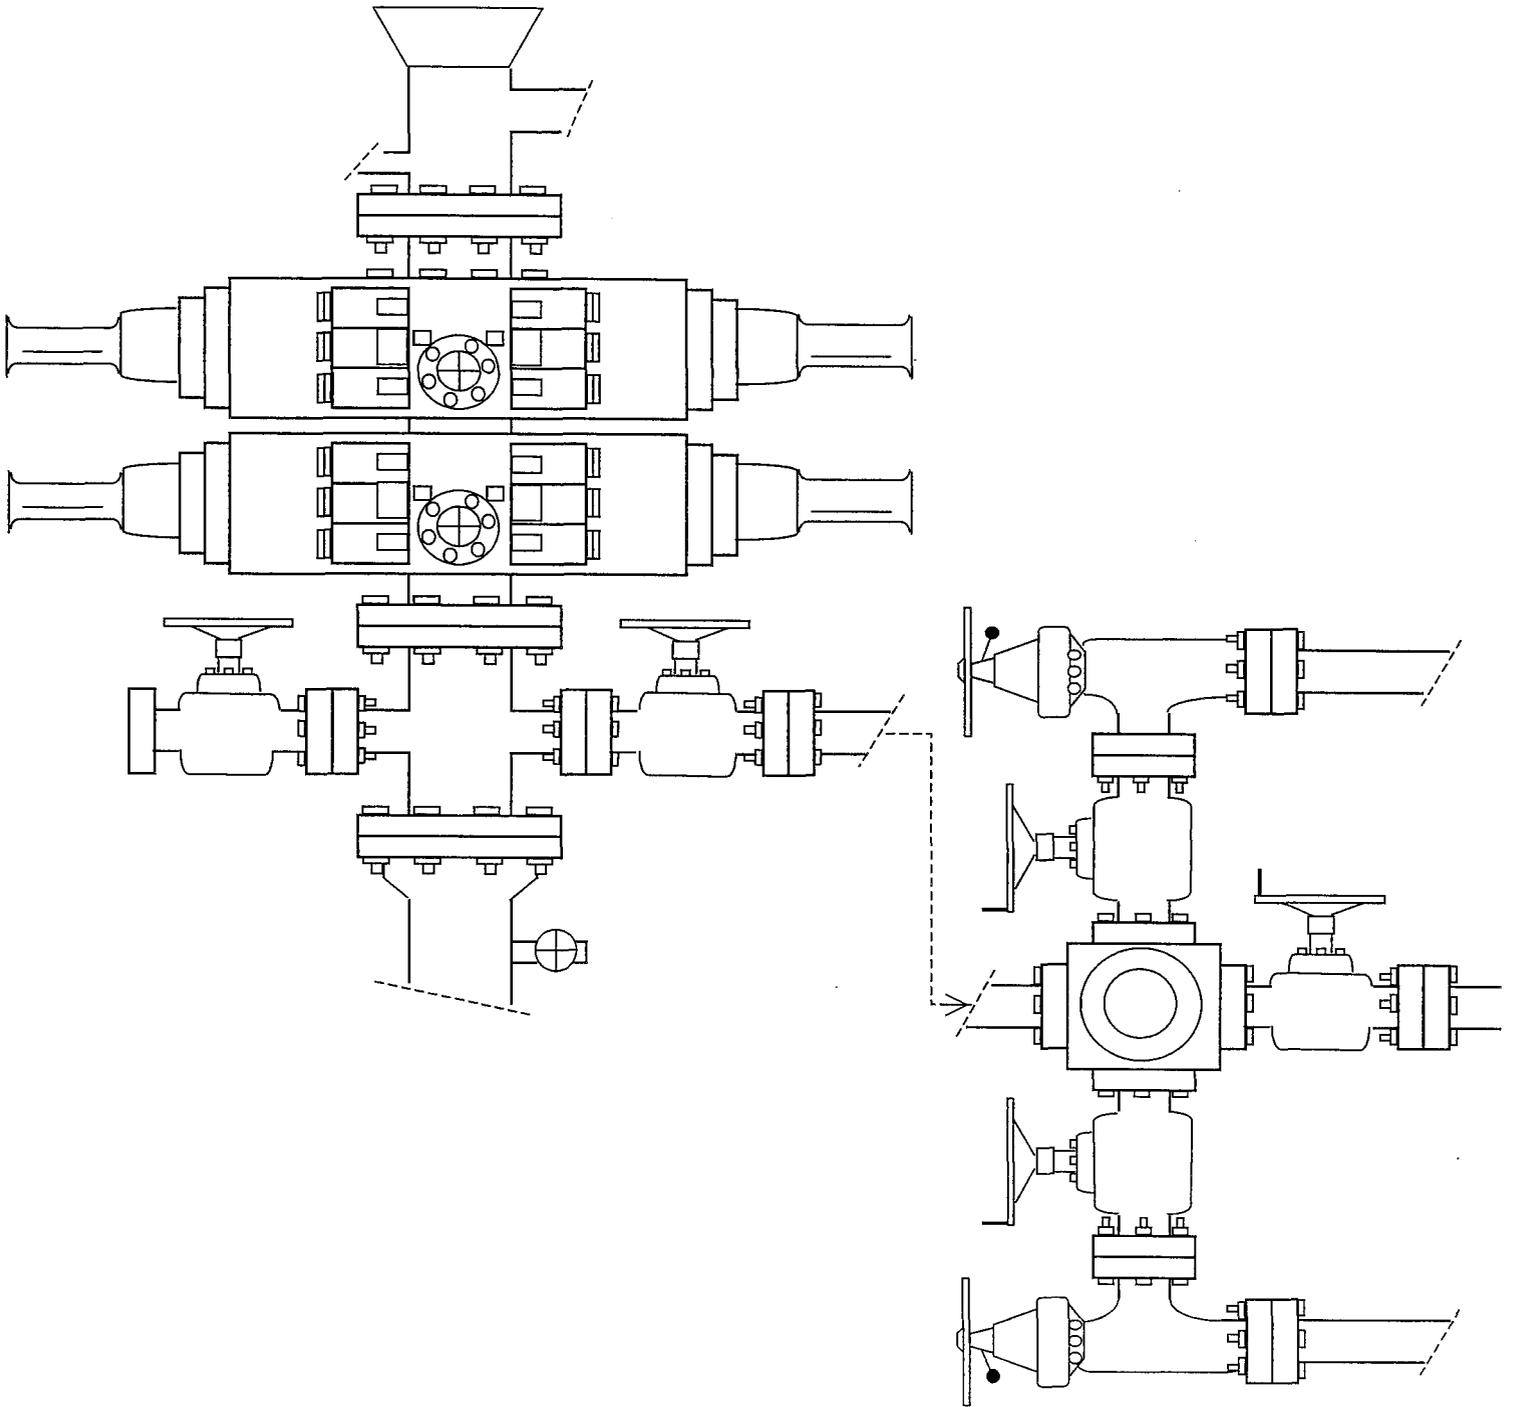


EXHIBIT C

CULTURAL RESOURCE INVENTORY OF  
INLAND RESOURCES' BLOCK SURVEY ON EIGHT MILE FLAT,  
TOWNSHIP 9 SOUTH, RANGE 18 EAST,  
SECTIONS 1,5,7,8,12,13, and 24, UINTAH COUNTY, UTAH

by

Josh C. Whiting  
and  
Keith R. Montgomery

Prepared For:

Bureau of Land Management  
Vernal Field Office

Prepared Under Contract With:

Inland Production  
Route 3 Box 3630  
Myton, Utah 84052

Prepared By:


Montgomery Archaeological Consultants  
P.O. Box 147  
Moab, Utah 84532

MOAC Report No. 04-130

September 10, 2004

United States Department of Interior (FLPMA)  
Permit No. 04-UT-60122

State of Utah Antiquities Project (Survey)  
Permit No. U-04-MQ-0455b

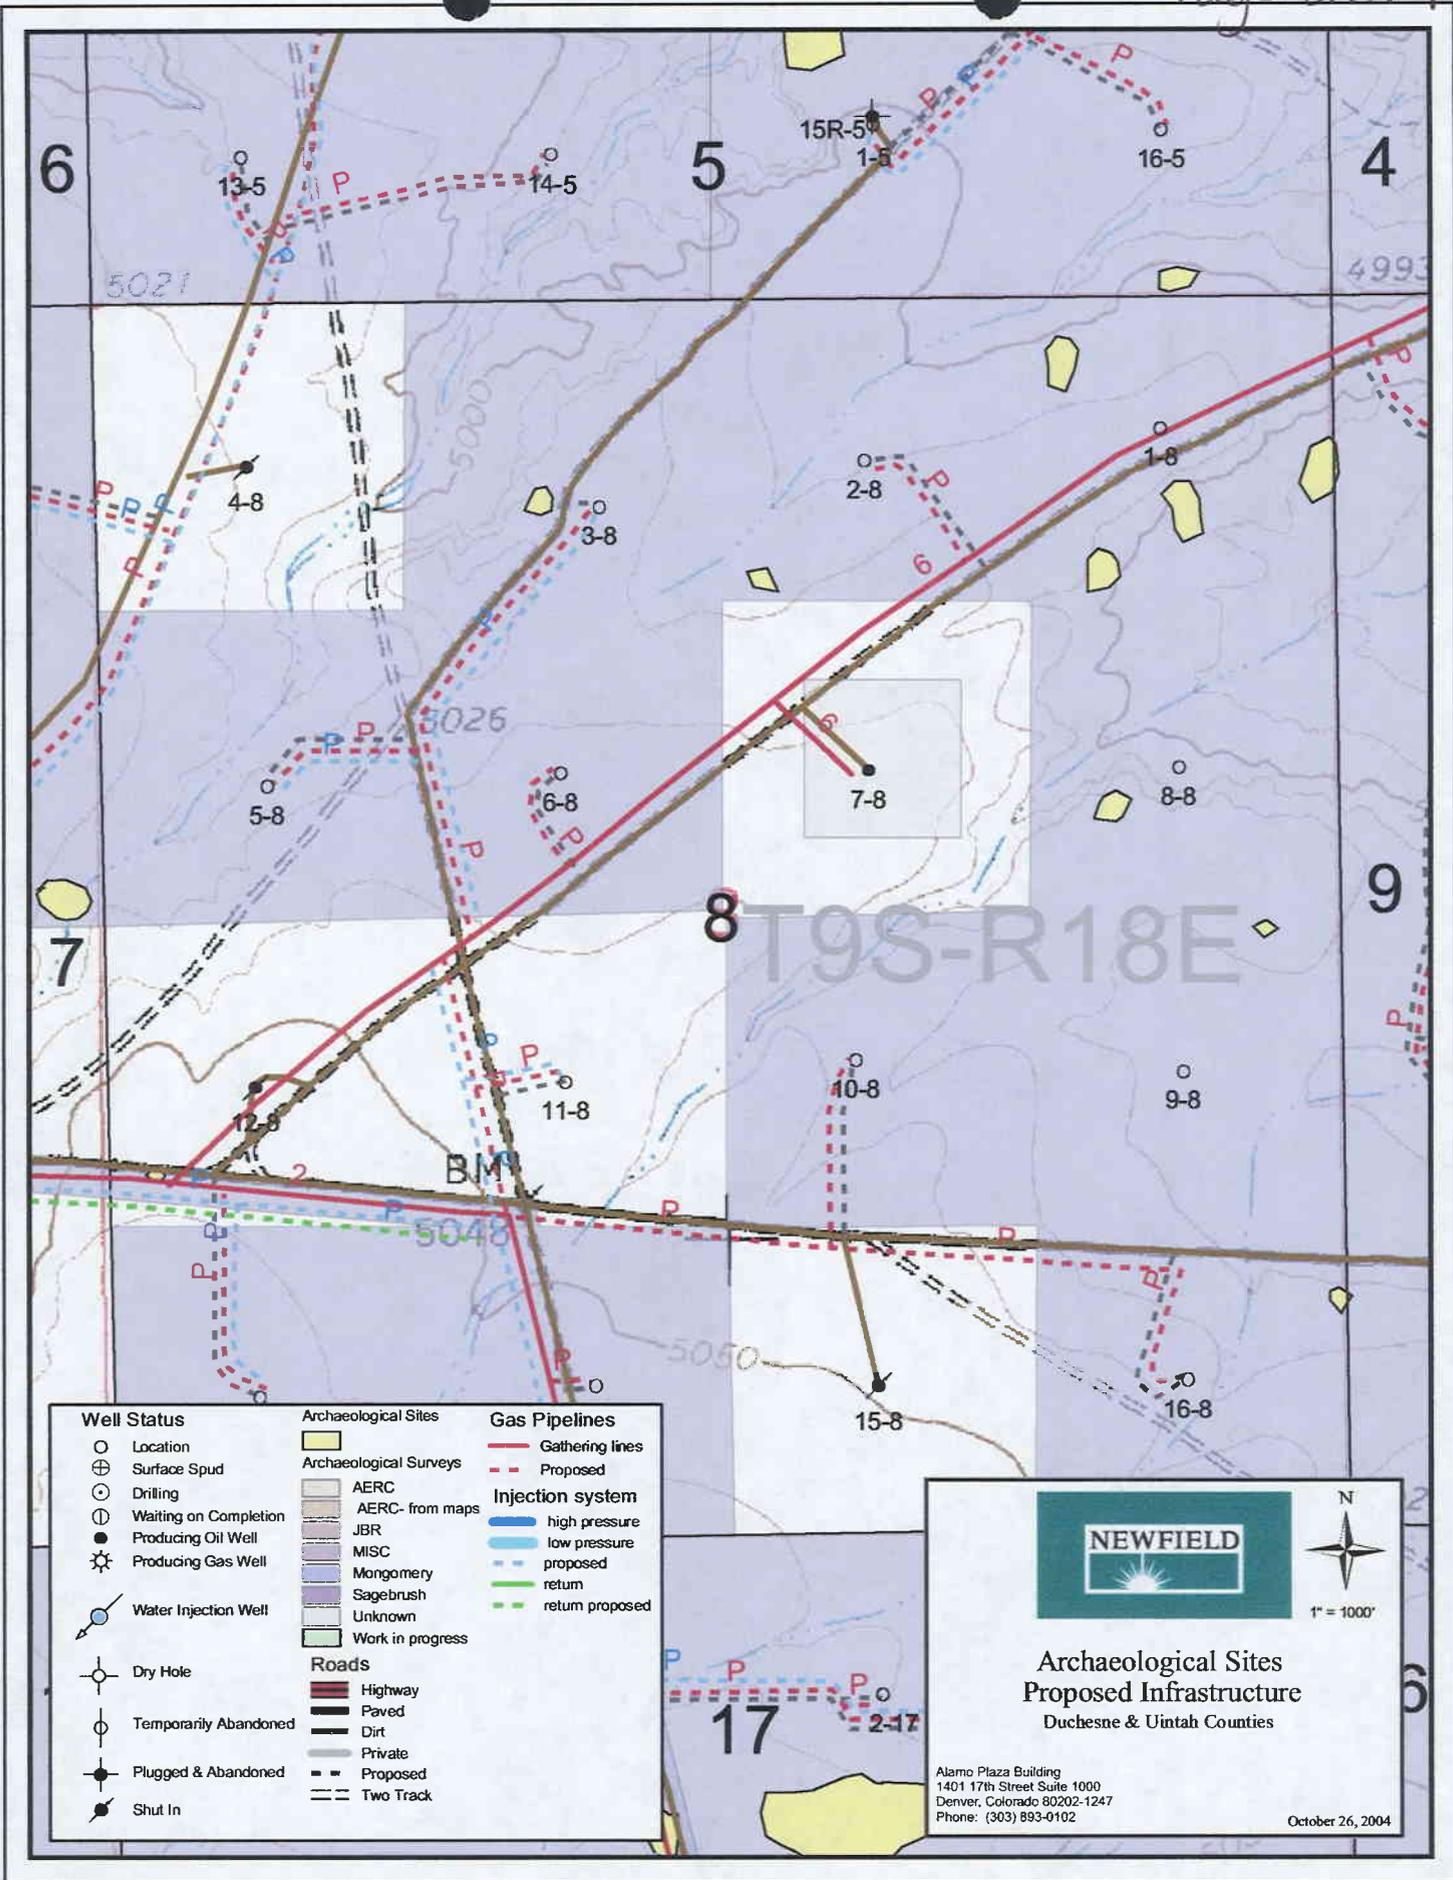

Well Status	Archaeological Sites	Gas Pipelines
○ Location	Archaeological Sites	— Gathering lines
⊕ Surface Spud	Archaeological Surveys	- - - Proposed
⊙ Drilling	AERC	
⊙ Waiting on Completion	AERC- from maps	<b>Injection system</b>
● Producing Oil Well	JBR	— high pressure
☼ Producing Gas Well	MISC	— low pressure
⊙ Water Injection Well	Mongomery	- - - proposed
⊙ Dry Hole	Sagebrush	— return
⊙ Temporarily Abandoned	Unknown	- - - return proposed
⊙ Plugged & Abandoned	Work in progress	
⊙ Shut In		
	<b>Roads</b>	
	— Highway	
	— Paved	
	— Dirt	
	— Private	
	- - - Proposed	
	- - - Two Track	



**Archaeological Sites  
Proposed Infrastructure**  
Duchesne & Uintah Counties

Alamo Plaza Building  
1401 17th Street Suite 1000  
Denver, Colorado 80202-1247  
Phone: (303) 893-0102

October 26, 2004

**INLAND RESOURCES, INC.**

**PALEONTOLOGICAL FIELD SURVEY OF PROPOSED  
PRODUCTION DEVELOPMENT AREAS,  
DUCHESNE & Uintah COUNTIES, UTAH**

Section 34, T 8 S, R 17 E (NW/SW, SW/SW, SE/SW, SW/SE);  
Section 20, T 8 S, R 17 E (NW/SE); Section 17, T 9 S, R 17 E  
(SE/SW, SW/SE, SE/SE); Section 20, T 9 S, R 17 E (NE/NE, NE/NW);  
Section 8, T 9 S, R 18 E (excluding NW/NW, SW/NE, NE/SW, NW/SW, SW/SE)


**REPORT OF SURVEY**

Prepared for:


**Inland Resources, Inc.**

Prepared by:

Wade E. Miller  
Consulting Paleontologist  
July 9, 2004

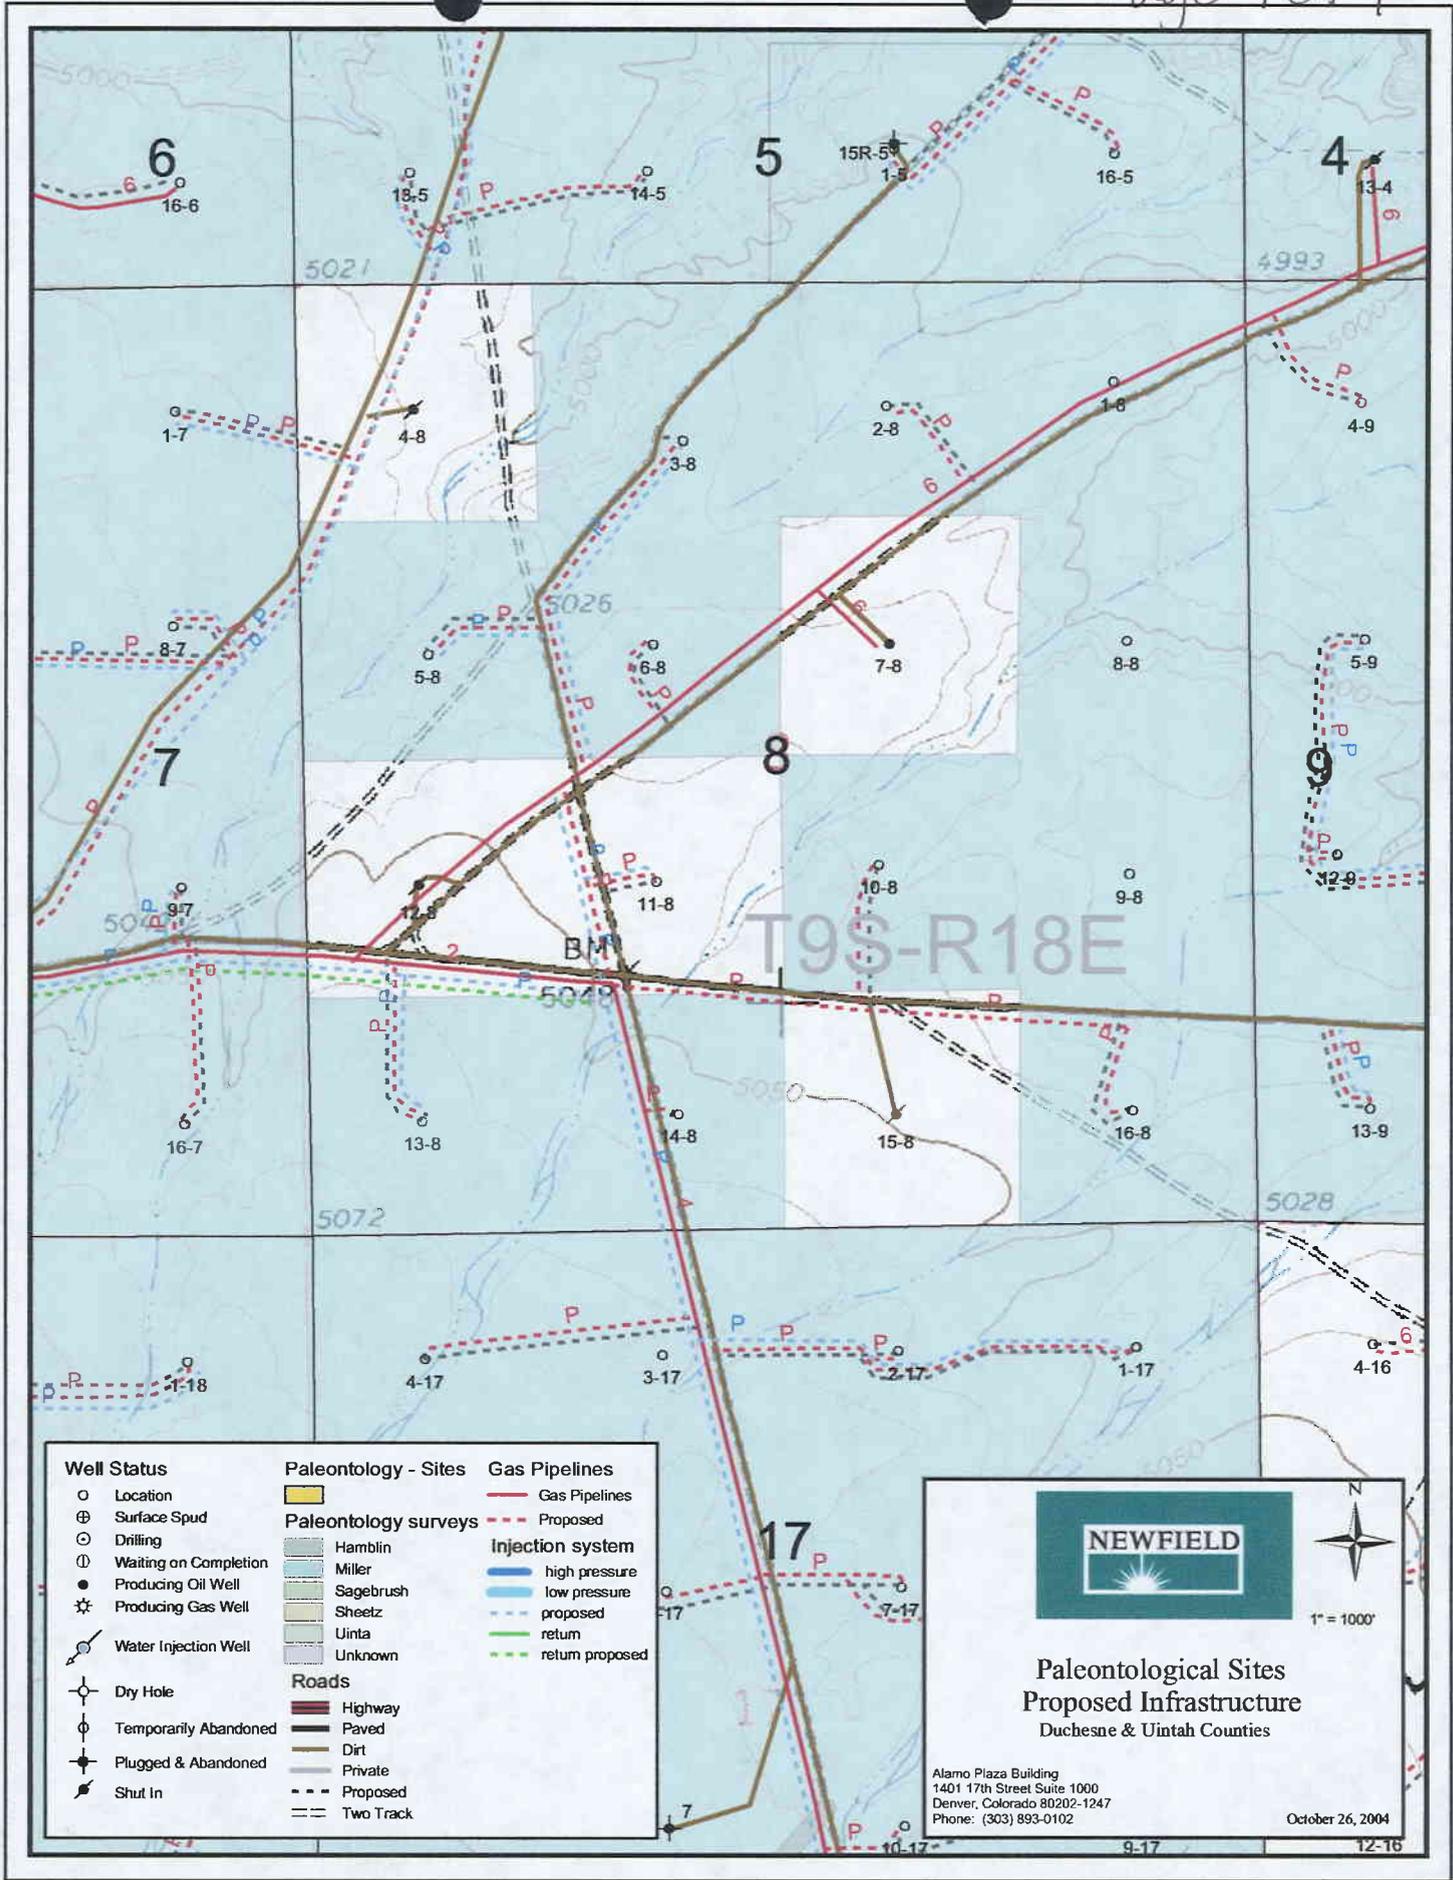

Well Status	Paleontology - Sites	Gas Pipelines
○ Location	Yellow box	— Gas Pipelines
⊕ Surface Spud	<b>Paleontology surveys</b>	- - - Proposed
⊙ Drilling	Hamblin	<b>Injection system</b>
⊖ Waiting on Completion	Miller	— high pressure
● Producing Oil Well	Sagebrush	— low pressure
⊛ Producing Gas Well	Sheetz	- - - proposed
⊖ Water Injection Well	Uinta	— return
⊖ Dry Hole	Unknown	- - - return proposed
⊖ Temporarily Abandoned	<b>Roads</b>	
⊖ Plugged & Abandoned	Highway	
⊖ Shut In	Paved	
	Dirt	
	Private	
	- - - Proposed	
	== Two Track	

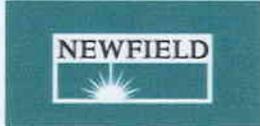

**NEWFIELD**



1" = 1000'

**Paleontological Sites  
Proposed Infrastructure**  
Duchesne & Uintah Counties

Alamo Plaza Building  
1401 17th Street Suite 1000  
Denver, Colorado 80202-1247  
Phone: (303) 893-0102

October 26, 2004

9-17 12-16

WORKSHEET  
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 11/22/2004

API NO. ASSIGNED: 43-047-36115

WELL NAME: FEDERAL 2-8-9-18  
OPERATOR: NEWFIELD PRODUCTION ( N2695 )  
CONTACT: MANDIE CROZIER

PHONE NUMBER: 435-646-3721

PROPOSED LOCATION:  
NWNE 08 090S 180E  
SURFACE: 0660 FNL 1980 FEL  
BOTTOM: 0660 FNL 1980 FEL  
UINTAH  
8 MILE FLAT NORTH ( 590 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal  
LEASE NUMBER: UTU-16540  
SURFACE OWNER: 1 - Federal  
PROPOSED FORMATION: GRRV  
COALBED METHANE WELL? NO

LATITUDE: 40.05086  
LONGITUDE: -109.9144

RECEIVED AND/OR REVIEWED:

Plat

Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. UTU0056 )

Potash (Y/N)

Oil Shale 190-5 (B) or 190-3 or 190-13

Water Permit  
(No. MUNICIPAL )

RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )

Fee Surf Agreement (Y/N)

LOCATION AND SITING:

\_\_\_ R649-2-3.

Unit \_\_\_\_\_

R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells

\_\_\_ R649-3-3. Exception

\_\_\_ Drilling Unit  
Board Cause No: \_\_\_\_\_  
Eff Date: \_\_\_\_\_  
Siting: \_\_\_\_\_

\_\_\_ R649-3-11. Directional Drill

COMMENTS: See Separate Files

STIPULATIONS: 1- Federal Approval  
2- Spacing Strip




OPERATOR: NEWPORT PROD CO (N2695)

SEC. 8 T9S R.18E

FIELD: EIGHT MILE FLAT NORTH (590)

COUNTY: UTAH

SPACING: R649-3-2 / GENERAL SITING

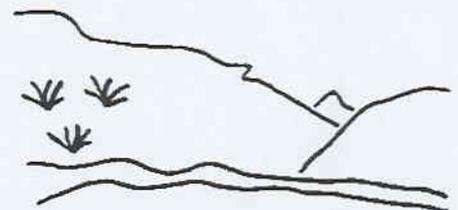

Utah Oil Gas and Mining

Wells	Units.shp	Fields.shp
⊕ GAS INJECTION	□ EXPLORATORY	□ ABANDONED
⊗ GAS STORAGE	□ GAS STORAGE	□ ACTIVE
⊗ LOCATION ABANDONED	□ NF PP OIL	□ COMBINED
⊕ NEW LOCATION	□ NF SECONDARY	□ INACTIVE
⊕ PLUGGED & ABANDONED	□ PENDING	□ PROPOSED
⊗ PRODUCING GAS	□ PI OIL	□ STORAGE
● PRODUCING OIL	□ PP GAS	□ TERMINATED
⊗ SHUT-IN GAS	□ PP GEOTHERML	
⊗ SHUT-IN OIL	□ PP OIL	
⊗ TEMP. ABANDONED	□ SECONDARY	
○ TEST WELL	□ TERMINATED	
△ WATER INJECTION		
⊕ WATER SUPPLY		
⊕ WATER DISPOSAL		



PREPARED BY: DIANA WHITNEY  
DATE: 24-NOVEMBER-2004



State of Utah

Department of  
Natural Resources

ROBERT L. MORGAN  
*Executive Director*

Division of  
Oil, Gas & Mining

MARY ANN WRIGHT  
*Acting Division Director*

OLENE S. WALKER  
*Governor*

GAYLE F. McKEACHNIE  
*Lieutenant Governor*

November 29, 2004

Newfield Production Company  
Rt. #3, Box 3630  
Myton, UT 84052

Re: Federal 2-8-9-18 Well, 660' FNL, 1980' FEL, NW NE, Sec. 8, T. 9 South,  
R. 18 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-36115.

Sincerely,

John R. Baza  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal District Office

**Operator:** Newfield Production Company  
**Well Name & Number** Federal 2-8-9-18  
**API Number:** 43-047-36115  
**Lease:** UTU-16540

**Location:** NW NE                      **Sec.** 8                      **T.** 9 South                      **R.** 18 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry a different reservoir.  
Use "APPLICATION FOR PERMIT -" for such proposals

*SUBMIT IN TRIPLICATE*

1. Type of Well

Oil Well     Gas Well     Other

2. Name of Operator

**NEWFIELD PRODUCTION COMPANY**

3. Address and Telephone No.

**Rt. 3 Box 3630, Myton Utah, 84052 435-646-3721**

4. Location of Well (Footage, Sec., T., R., m., or Survey Description)

**660 FNL 1980 FEL      NW/NE Section 8, T9S R18E**

5. Lease Designation and Serial No.

**UTU-16540**

6. If Indian, Allottee or Tribe Name

**NA**

7. If Unit or CA, Agreement Designation

**SUNDANCE**

8. Well Name and No.

**FEDERAL 2-8-9-18**

9. API Well No.

**43-047-36115**

10. Field and Pool, or Exploratory Area

**EIGHT MILE FLAT NORTH**

11. County or Parish, State

**UINTAH COUNTY, UT.**

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

Notice of Intent  
 Subsequent Report  
 Final Abandonment Notice

Abandonment  
 Recompletion  
 Plugging Back  
 Casing Repair  
 Altering Casing  
 Other **Permit Extension**

Change of Plans  
 New Construction  
 Non-Routine Fracturing  
 Water Shut-Off  
 Conversion to Injection  
 Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Newfield Production Company requests to extend the Permit to Drill this well for one year. The original approval date was 11/29/04 (expiration 11/29/05).

This APD has not been approved yet by the BLM.

**Approved by the**  
Utah Division of  
Oil, Gas and Mining  
Date: 11-17-05  
By: [Signature]

**NOV 16 2005**

14. I hereby certify that the foregoing is true and correct

Signed

[Signature]  
Mandie Crozier

Title

Regulatory Specialist

Date

11/11/2005

CC: UTAH DOGM

(This space for Federal or State office use)

Approved by

Title

Conditions of approval, if any:

CC: Utah DOGM

COPIES SENT TO OPERATOR  
DATE: 11-18-05  
[Signature]

RESET

**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 43-047-36115  
**Well Name:** Federal 2-8-9-18  
**Location:** NW/NE Section 8, T9S R18E  
**Company Permit Issued to:** Newfield Production Company  
**Date Original Permit Issued:** 11/29/2004

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes  No  NA

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes  No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes  No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes  No

Has the approved source of water for drilling changed? Yes  No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes  No

Is bonding still in place, which covers this proposed well? Yes  No

Mandi Cozies  
Signature

11/11/2005  
Date

Title: Regulatory Specialist

Representing: Newfield Production Company

NOV 16 2005

REGISTRATION

RECEIVED

NOV 22 2004

BLM VERNAL, UTAH

Form 3160-3  
(September 2001)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED  
OMB No. 1004-0136  
Expires January 31, 2004

5. Lease Serial No.  
UTU-16540

6. If Indian, Allottee or Tribe Name  
N/A

7. If Unit or CA Agreement, Name and No.  
8 Mile N/A Flat P-E

8. Lease Name and Well No.  
Federal 2-8-9-18

9. API Well No.  
43-047-310115

10. Field and Pool, or Exploratory  
Eight Mile Flat

11. Sec., T., R., M., or Blk. and Survey or Area  
NW/NE Sec. 8, T9S R18E

12. County or Parish  
Uintah

13. State  
UT

1a. Type of Work:  DRILL  REENTER  
1b. Type of Well:  Oil Well  Gas Well  Other  Single Zone  Multiple Zone

2. Name of Operator  
Newfield Production Company

3a. Address  
Route #3 Box 3630, Myton UT 84052

3b. Phone No. (include area code)  
(435) 646-3721

4. Location of Well (Report location clearly and in accordance with any State requirements.)\*  
At surface NW/NE 660' FNL 1980' FEL  
At proposed prod. zone

14. Distance in miles and direction from nearest town or post office\*  
Approximatley 19.3 miles southeast of Myton, Utah

15. Distance from proposed\* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 1980' f/lease, NA f/unit

16. No. of Acres in lease  
1436.44

17. Spacing Unit dedicated to this well  
40 Acres

18. Distance from proposed location\* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1,326'

19. Proposed Depth  
5980'

20. BLM/BIA Bond No. on file  
UTU0056

21. Elevations (Show whether DF, KDB, RT, GL, etc.)  
5003' GL

22. Approximate date work will start\*  
2nd Quarter 2005

23. Estimated duration  
Approximately seven (7) days from spud to rig release.

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature *Mandie Crozier* Name (Printed/Typed) Mandie Crozier Date 11/18/04

Title Regulatory Specialist  
Approved by (Signature) *Howard B. Leverage* Name (Printed/Typed) Date 12/12/2005  
Title ASSISTANT Field Manager Office

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

RECEIVED

DEC 20 2005

DIV. OF OIL, GAS & MINING

4006M

NOTICE OF APPROVAL


CONDITIONS OF APPROVAL ATTACHED

08/11/05



UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
VERNAL FIELD OFFICE

170 South 500 East VERNAL, UT 84078 (435) 781-4400



**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO  
DRILL**

**Company:** NEWFIELD PRODUCTION CO      **Location:** NWNE, Sec.8, T9S, R18E  
**Well No:** Federal 2-8-9-18                      **Lease No:** UTU-16540  
**API No:** 43-047-36115                              **Agreement:** N/A

Petroleum Engineer:	Matt Baker	Office: 435-781-4490	Cell: 435-828-4470
Petroleum Engineer:	Michael Lee	Office: 435-781-4432	Cell: 435-828-7875
Supervisory Petroleum Technician:	Jamie Sparger	Office: 435-781-4502	Cell: 435-828-3913
Environmental Scientist:	Paul Buhler	Office: 435-781-4475	Cell: 435-828-4029
Environmental Scientist:	Karl Wright	Office: 435-781-4484	
Natural Resource Specialist:	Holly Villa	Office: 435-781-4404	
Natural Resource Specialist:	Melissa Hawk	Office: 435-781-4476	
<b>Office Fax:</b> (435) 781-4410	<b>After hours message number:</b> (435) 781-4513		

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR  
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations.

**NOTIFICATION REQUIREMENTS**

- Location Construction (Notify Melissa Hawk ES / NRS) - Forty-Eight (48) hours prior to construction of location and access roads.
- Location Completion (Notify Melissa Hawk ES / NRS) - Prior to moving on the drilling rig.
- Spud Notice (Notify PE) - Twenty-Four (24) hours prior to spudding the well.
- Casing String & Cementing (Notify Jamie Sparger SPT) - Twenty-Four (24) hours prior to running casing and cementing all casing strings.
- BOP & Related Equipment Tests (Notify Jamie Sparger SPT) - Twenty-Four (24) hours prior to initiating pressure tests.
- First Production Notice (Notify PE) - Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)***

This well is being approved in accordance with Washington Instruction Memorandum 2005-247 and Section 390 (Category 3) of the Energy Policy Act which establishes statutory categorical exclusions (CX) under the National Environmental Policy Act (NEPA). Category 3 states that an oil or gas well can be drilled within a developed field for which an approved land use plan or any environmental document prepared pursuant to NEPA analyzed drilling as a reasonably foreseeable activity, so long as such plan or document was approved within five (5) years prior to the date of spudding the well. This well is covered under the *Final Environmental Impact Statement and Record of Decision Castle Peak and Eightmile Flat Oil and Gas Exploration Project Newfield Rocky Mountains Inc.*, signed November 21, 2005. If the well has not been spudded by November 21, 2010, a new environmental document will have to be prepared prior to the approval of the APD.

Mountain Plover surveys shall have to be conducted in accordance with the U.S. Fish and Wildlife Service Mountain Plover Survey Guidelines.

No construction or drilling shall be allowed during the burrowing owl nesting season (April 1 to Aug. 15), without first consulting the BLM biologist. If no nesting owls are found, drilling will be allowed.

4 to 6 inches of topsoil shall be stripped from the location and placed where it can most easily be accessed for interim reclamation. Once the well has been converted to water injection, the fill slopes shall be recontoured and the topsoil shall be spread over the entire well location. The well location shall then be seeded with crested wheatgrass (Variety Hycrest) at a 12 lb/acre rate (pure live seed). After seeding has been completed, an access road loop to the well head can be established. The reserve pit will be allowed to stay open until interim reclamation is completed so the entire area can be seeded at the same time. The interim seeding of the well location and reserve pit shall be done by either drilling the seed or by broadcasting the seed and dragging it with a spike tooth harrow.

The pipeline trench shall be dug in the borrow ditch of the road and the trench material side cast into the existing vegetation. Both the water line and the gas line shall be buried in the same trench. When backfilling the trenches, care should be taken to disturb as little of the vegetation as possible and thus allowing the existing plants to reestablish on their own, however, these disturbed areas should also be seeded with crested wheatgrass at the 12 lb/acre rate to ensure vegetation establishment and to keep invasive weeds to a minimum. All seeding of the pipelines shall be completed using a seed drill.

The temporary gas lines used during the temporary production phase shall be laid on the surface, and then removed once the well is turned to water injection.

No pipeline construction will be allowed when soils are muddy and rutting of soils becomes apparent from the use of vehicles. If rutting occurs, operations must cease until soils are dry or frozen.

## ***DOWNHOLE CONDITIONS OF APPROVAL***

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

### **SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL**

1. Casing cementing operations for production casing shall return cement to surface.

### **DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS**

1. There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
2. The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
3. **Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.**
4. Blowout prevention equipment (BOPE) will remain in use until the well is completed or abandoned. Closing unit controls must remain unobstructed and readily accessible at all times. Choke manifolds must be located outside of the rig substructure.

All BOPE components will be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests must be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test must be reported in the driller's log.

BOP drills must be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.

Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.

No aggressive/fresh hard-banded drill pipe shall be used within casing.

5. All shows of fresh water and minerals will be reported and protected. A sample will be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows will be adequately tested for commercial possibilities, reported, and protected.

6. No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office must be obtained and notification given before resumption of operations.
7. Chronologic drilling progress reports must be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.

Any change in the program must be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) must be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, will require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.

In accordance with 43 CFR 3162.4-3, this well must be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.

8. Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) will be submitted only when requested by the BLM, Vernal Field Office.

**Please submit an electronic copy of all logs run on this well in LAS format to [UT\\_VN\\_Welllogs@BLM.gov](mailto:UT_VN_Welllogs@BLM.gov). This submission will supersede the requirement for submittal of paper logs to the BLM. The cement bond log must be submitted in raster format (TIF, PDF other).**

9. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the BLM, Vernal Field Office.

All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.

10. Oil and gas meters will be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.
11. A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
12. This APD is approved subject to the requirement that, should the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
  - a. Operator name, address, and telephone number.
  - b. Well name and number.
  - c. Well location ( $\frac{1}{4}$  $\frac{1}{4}$ , Sec., Twn, Rng, and P.M.).
  - d. Date well was placed in a producing status (date of first production for which royalty will be paid).
  - e. The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - f. The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
  - g. Unit agreement and / or participating area name and number, if applicable.
  - h. Communitization agreement number, if applicable.
13. Any venting or flaring of gas will be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.

14. All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, will be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production
15. Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
16. Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

# DIVISION OF OIL, GAS AND MINING

## **SPUDDING INFORMATION**

Name of Company: NEWFIELD PRODUCTION COMPANY

Well Name: FEDERAL 2-8-9-18

Api No: 43-047-36115 Lease Type: FEDERAL

Section 08 Township 09S Range 18E County UINTAH

Drilling Contractor ROSS DRILLING RIG # 24

### **SPUDDED:**

Date 02/15/06

Time 10:00 AM

How DRY

**Drilling will Commence:** \_\_\_\_\_

Reported by ALVIN NIELSEN

Telephone # 1-435-823-7468

Date 02/15/2006 Signed CHD

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING  
ENTITY ACTION FORM - FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY  
ADDRESS: RT. 3 BOX 3630  
MYTON, UT 84052

OPERATOR ACCT. NO. N2695

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					RO	SC	TP	RG	COUNTY		
A	99999	15206	43-047-36717	FEDERAL 14-29-8-18	SE/SW	29	8S	18E	UINTAH	02/18/06	2/22/06
WELL 1 COMMENTS: <i>GRPV</i>											
A	99999	15207	43-047-36664	FEDERAL 12-29-8-18	NW/SW	29	8S	18E	UINTAH	02/16/06	2/22/06
WELL 2 COMMENTS: <i>GRPV</i>											
A	99999	14844	43-047-36115	FEDERAL 2-8-9-18	SE/NE	8	9S	18E	UINTAH	02/15/06	2/22/06
WELL 3 COMMENTS: <i>GRPV Sundance</i>											
A	99999	14844	43-047-35978	FEDERAL 5-33-5-18	SW/NW	33	8S	18E	UINTAH	02/21/06	2/22/06
WELL 4 COMMENTS: <i>GRPV Sundance</i>											
ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	RO	SC	TP	RG	COUNTY	SPUD DATE	EFFECTIVE DATE
WELL 5 COMMENTS:											
ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	RO	SC	TP	RG	COUNTY	SPUD DATE	EFFECTIVE DATE
WELL 6 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED  
FEB 22 2006

*Lana Nebeler*  
Signature  
Lana Nebeler  
Production Clerk  
January 20, 2006  
Date

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.  
UTU16540

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.  
SUNDANCE UNIT

8. Well Name and No.  
FEDERAL 2-8-9-18

9. API Well No.  
4304736115

10. Field and Pool, or Exploratory Area  
Monument Butte

11. County or Parish, State  
Uintah, UT

**SUBMIT IN TRIPLICATE - Other Instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630  
Myton, UT 84052

3b. Phone No. (include are code)  
435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
660 FNL 1980 FEL  
NW/NE Section 8 T9S R18E

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 2/15/06 MIRU Ross # 24. Spud well @ 10:00am. Drill 308' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24 # csgn. Set @ 314.75 2/23/06 cement with 160 sks of class "G" w/ 3% CaCL2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg > 1.17 cf/ sk yeild. Returned 5 bbls cement to pit. WOC.

I hereby certify that the foregoing is true and correct Name (Printed/ Typed) Don Bastian	Title Drilling Foreman
Signature 	Date 02/24/2006

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

**RECEIVED**  
**MAR 03 2006**

# NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

\_\_\_\_\_ 8 5/8 CASING SET AT \_\_\_\_\_ 314.75 \_\_\_\_\_

LAST CASING 8 5/8" SET AT 314.75'  
 DATUM 12' KB  
 DATUM TO CUT OFF CASING \_\_\_\_\_  
 DATUM TO BRADENHEAD FLANGE \_\_\_\_\_  
 TD DRILLER 308' LOGGER \_\_\_\_\_  
 HOLE SIZE 12 1/4

OPERATOR Newfield Production Company  
 WELL Sundance Federal 2-8-9-18  
 FIELD/PROSPECT Monument Butte  
 CONTRACTOR & RIG # Ross Rig #24

**LOG OF CASING STRING:**

PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
		Shoe Joint 40.73'					
		WHI - 92 csg head			8rd	A	0.95
7	8 5/8"	Maverick ST&C csg	24#	J-55	8rd	A	302.9
		<b>GUIDE</b> shoe			8rd	A	0.9
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING			304.75
TOTAL LENGTH OF STRING		304.75	7	LESS CUT OFF PIECE			2
LESS NON CSG. ITEMS		1.85		PLUS DATUM TO T/CUT OFF CSG			12
PLUS FULL JTS. LEFT OUT		0		CASING SET DEPTH			<b>314.75</b>
TOTAL		302.9	7	} COMPARE			
TOTAL CSG. DEL. (W/O THRDS)		300.64	7				
TIMING		1ST STAGE					
BEGIN RUN CSG.	Spud	10:am	2/15/2006	GOOD CIRC THRU JOB <u>Yes</u>			
CSG. IN HOLE		11:00am	2/16/2006	Bbls CMT CIRC TO SURFACE <u>5</u>			
BEGIN CIRC		12:51PM	2/23/2006	RECIPROCATED PIPE FOR <u>N/A</u>			
BEGIN PUMP CMT		12:59PM	2/23/2006				
BEGIN DSPL. CMT		1:10PM	2/23/2006	BUMPED PLUG TO <u>105</u> PSI			
PLUG DOWN		1:21PM	2/23/2006				

CEMENT USED		CEMENT COMPANY- <b>B. J.</b>					
STAGE	# SX	CEMENT TYPE & ADDITIVES					
1	160	Class "G" w/ 2% CaCL2 + 1/4#/sk Cello-Flake mixed @ 15.8 ppg 1.17 cf/sk yield					
CENTRALIZER & SCRATCHER PLACEMENT		SHOW MAKE & SPACING					
Centralizers - Middle first, top second & third for 3							

COMPANY REPRESENTATIVE Don Bastian DATE 2/23/2006

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.  
UTU16540

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.  
SUNDANCE UNIT

8. Well Name and No.  
FEDERAL 2-8-9-18

9. API Well No.  
4304736115

10. Field and Pool, or Exploratory Area  
Monument Butte

11. County or Parish, State  
Uintah, UT

**SUBMIT IN TRIPLICATE - Other Instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630  
Myton, UT 84052

3b. Phone No. (include are code)  
435.646.3721


4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
660 FNL 1980 FEL  
NW/NE Section 8 T9S R18E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Weekly Status Report
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 3-5-2006 MIRU NDSI Rig # 1. Set all equipment. Pressure test Kelly, TIW, Choke manifold, & Bop's to 2,000 psi. Test 8.625 csgn to 1,500 psi. Vernal BLM field, & Roosevelt DOGM office was notified of test. PU BHA and tag cement @ 265'. Drill out cement & shoe. Drill a 7.875 hole with fresh water to a depth of 5956'. Lay down drill string & BHA. Open hole log w/ Dig/SP/GR log's TD to surface. PU & TIH with Guide shoe, shoe jt, float collar, 140 jt's of 5.5 J-55, 15.5# csgn. Set @ 5922.84' / KB. Cement with 300 sks cement mixed @ 11.0 ppg & 3.43 yld. Then 450 sks cement mixed @ 14.4 ppg & 1.24 yld. With 19 bbls cement returned to pit. Nipple down Bop's. Drop slips @ 100,000 #'s tension. Release rig 1:30 am on 3-10-2006.

I hereby certify that the foregoing is true and correct Name (Printed/ Typed) Troy Zufelt	Title Drilling Foreman
Signature 	Date 03/11/2006

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Title	Date
	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

**RECEIVED**  
**MAR 15 2006**

# NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

5 1/2" CASING SET AT 5922.84

LAST CASING 8 5/8" SET AT 314'  
 DATUM 12' KB  
 DATUM TO CUT OFF CASING 12'  
 DATUM TO BRADENHEAD FLANGE \_\_\_\_\_  
 TD DRILLER 5950' LoggerTD 5957'  
 HOLE SIZE 7 7/8"

Flt clr @ 5880.87'  
 OPERATOR Newfield Production Company  
 WELL Federal 2-8-9-18  
 FIELD/PROSPECT Monument Butte  
 CONTRACTOR & RIG # NDSI# 1

**LOG OF CASING STRING:**

PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
		Landing Jt					14
		Short jt <u>6.15" @ 4030.97'</u>					
139	5 1/2"	ETC LT & C casing	15.5#	J-55	8rd	A	5880.87
		Float collar					0.6
1	5 1/2"	ETC LT&C csg	15.5#	J-55	8rd	A	42.72
		<b>GUIDE</b> shoe			8rd	A	0.65
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING			5924.84
TOTAL LENGTH OF STRING		5924.84	140	LESS CUT OFF PIECE			14
LESS NON CSG. ITEMS		15.25		PLUS DATUM TO T/CUT OFF CSG			12
PLUS FULL JTS. LEFT OUT		208.76	5	CASING SET DEPTH			<b>5922.84</b>
TOTAL		<b>6118.35</b>	145	} COMPARE			
TOTAL CSG. DEL. (W/O THRDS)		6118.35	145				
TIMING		1ST STAGE	2nd STAGE				
BEGIN RUN CSG.		3/10/2006	2:40 PM	GOOD CIRC THRU JOB <u>YES</u>			
CSG. IN HOLE		3/10/2006	6:00 AM	Bbls CMT CIRC TO SURFACE <u>19</u>			
BEGIN CIRC		3/10/2006	7:57 AM	RECIPROCATED PIPE FOR <u>THRUSTROKE</u>			
BEGIN PUMP CMT		3/10/2006	8:10 AM	DID BACK PRES. VALVE HOLD ? <u>YES</u>			
BEGIN DSPL. CMT		3/10/2006	9:00 AM	BUMPED PLUG TO <u>2000</u> PSI			
PLUG DOWN		3/10/2006	9:22 AM				

CEMENT USED		CEMENT COMPANY- <b>B. J.</b>	
STAGE	# SX	CEMENT TYPE & ADDITIVES	
1	300	Premlite II w/ 10% gel + 3 % KCL, 3#s /sk CSE + 2# sk/kolseal + 1/4#s/sk Cello Flake	
		mixed @ 11.0 ppg W / 3.43 cf/sk yield	
2	450	50/50 poz W/ 2% Gel + 3% KCL, .5%EC1, 1/4# sk C.F. 2% gel. 3% SM mixed @ 14.4 ppg W/ 1.24 YLD	
CENTRALIZER & SCRATCHER PLACEMENT		SHOW MAKE & SPACING	
Centralizers - Middle first, top second & third. Then every third collar for a total of 20.			

COMPANY REPRESENTATIVE Troy Zufelt DATE 3/10/2006

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires January 31, 2004

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.  
UTU16540

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA Agreement, Name and/or No.  
SUNDANCE UNIT

8. Well Name and No.  
FEDERAL 2-8-9-18

9. API Well No.  
4304736115

10. Field and Pool, or Exploratory Area  
Monument Butte

11. County or Parish, State  
Uintah, UT

**SUBMIT IN TRIPLICATE - Other Instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630  
Myton, UT 84052

3b. Phone No. (include are code)  
435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
660 FNL 1980 FEL  
NW/NE Section 8 T9S R18E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Variance _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Newfield Production Company is requesting a variance from Onshore Order 43 CFR Part 3160 Section 4 requiring production tanks to be equipped with Enardo or equivalent vent line valves. Newfield operates wells that produce from the Green River formation, which are relatively low gas producers (20 mcfpd). The majority of the wells are equipped with a three phase separator to maximize gas separation and sales.

Newfield is requesting a variance for safety reasons. Crude oil production tanks equipped with back pressure devices will emit a surge of gas when the thief hatches are open. While gauging tanks, lease operators will be subject to breathing toxic gases as well as risk a fire hazard, under optimum conditions

4-12-06  
CRO

Accepted by the  
Utah Division of  
Oil, Gas and Mining

Federal Approval Of This  
Action Is Necessary

4/10/06  
D. S. [Signature]

I hereby certify that the foregoing is true and correct  
Name (Printed/ Typed)  
Mandie Crozier

Title  
Regulatory Specialist

Signature  
[Signature]

Date  
04/06/2006

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by \_\_\_\_\_  
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title \_\_\_\_\_ Date \_\_\_\_\_  
Office \_\_\_\_\_

RECEIVED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

APR 07 2006

(Instructions on reverse)

DIV. OF OIL, GAS & MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires January 31, 2004

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.  
UTU16540

6. If Indian, Allottee or Tribe Name.

7. If Unit or C/A Agreement, Name and/or No.  
SUNDANCE UNIT

8. Well Name and No.  
FEDERAL 2-8-9-18

9. API Well No.  
4304736115

10. Field and Pool, or Exploratory Area  
Monument Butte

11. County or Parish, State  
Uintah, UT

**SUBMIT IN TRIPLICATE - Other Instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630  
Myton, UT 84052

3b. Phone No. (include are code)  
435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
660 FNL 1980 FEL  
NW/NE Section 8 T9S R18E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Formation water is produced to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

**Accepted by the  
Utah Division of  
Oil, Gas and Mining  
FOR RECORD ONLY**

I hereby certify that the foregoing is true and correct Name (Printed/ Typed) Mandie Crozier	Title Regulatory Specialist
Signature <i>Mandie Crozier</i>	Date 04/06/2006

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

**RECEIVED**  
**APR 07 2006**  
**DIV. OF OIL, GAS & MINING**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU16540
2. Name of Operator NEWFIELD PRODUCTION COMPANY		6. If Indian, Allottee or Tribe Name.
3a. Address Route 3 Box 3630 Myton, UT 84052	3b. Phone No. (include are code) 435.646.3721	7. If Unit or CA/Agreement, Name and/or No. SUNDANCE UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 660 FNL 1980 FEL NW/NE Section 8 T9S R18E		8. Well Name and No. FEDERAL 2-8-9-18
		9. API Well No. 4304736115
		10. Field and Pool, or Exploratory Area Monument Butte
		11. County or Parish, State Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Weekly Status Report
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Status report for time period 03/22/06 - 04/05/06

Subject well had completion procedures initiated in the Green River formation on 03-22-06 without the use of a service rig over the well. A cement bond log was run and a total of two Green River intervals were perforated and hydraulically fracture treated with 20/40 mesh sand. Perforated intervals are as follows: Stage #1 (5562'-5580'), (5528'-5540'); Stage #2 (4853'-4859'). All perforations, were 4 JSPF. Composite flow-through frac plugs were used between stages. Fracs were flowed back through chokes. A service rig was moved over the well on 04-03-2006. Bridge plugs were drilled out and well was cleaned to 5879'. Zones were swab tested for sand cleanup. A new 1 1/2" bore rod pump was run in well on sucker rods. Well was placed on production via rod pump on 04-05-2006.

I hereby certify that the foregoing is true and correct Name (Printed/ Typed) Lana Nebeker	Title Production Clerk
Signature <i>Lana Nebeker</i>	Date 05/03/2006

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

RECEIVED

MAY 05 2006

DIV. OF OIL, GAS & MINING

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

**WELL COMPLETION OR RECOMPLETION REPORT AND LOG\***

5. LEASE DESIGNATION AND SERIAL NO.

UTU-16540

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

NA

7. UNIT AGREEMENT NAME

Sundance Unit

8. FARM OR LEASE NAME, WELL NO.

Federal 2-8-9-18

9. WELL NO.

43-047-36115

10. FIELD AND POOL OR WILDCAT

Eight Mile Flat

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA

Sec. 8, T9S, R18E

1a. TYPE OF WORK

OIL WELL  GAS WELL  DRY  Other \_\_\_\_\_

1b. TYPE OF WELL

NEW WELL  WORK OVER  DEEPEN  PLUG BACK  DIFF RESVR.  Other \_\_\_\_\_

2. NAME OF OPERATOR

Newfield Exploration Company

3. ADDRESS AND TELEPHONE NO.

1401 17th St. Suite 1000 Denver, CO 80202

4. LOCATION OF WELL (Report locations clearly and in accordance with any State requirements.)\*

At Surface 660' FNL & 1980' FEL (NW/NE) Sec. 8, T9S, R18E  
At top prod. Interval reported below

At total depth

14. API NO.  
43-047-36115

DATE ISSUED  
11/29/04

12. COUNTY OR PARISH  
Uintah

13. STATE  
UT

15. DATE SPUNDED  
2/15/06

16. DATE T.D. REACHED  
3/9/06

17. DATE COMPL. (Ready to prod.)  
4/5/06

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)\*  
5003' GL 5015' KB

19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD  
5956'

21. PLUG BACK T.D., MD & TVD  
5879'

22. IF MULTIPLE COMPL. HOW MANY\*

23. INTERVALS DRILLED BY  
----->

ROTARY TOOLS  
X

CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION--TOP, BOTTOM, NAME (MD AND TVD)\*

Green River 4853'-5580'

25. WAS DIRECTIONAL SURVEY MADE  
No

26. TYPE ELECTRIC AND OTHER LOGS RUN

Dual Induction Guard, SP, Compensated Density, Compensated Neutron, GR, Caliper, Cement Bond Log

27. WAS WELL CORED  
No

23. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" - J-55	24#	315'	12-1/4"	To surface with 160 sx Class "G" cmt	
5-1/2" - J-55	15.5#	5923'	7-7/8"	300 sx Premlite II and 450 sx 50/50 Poz	

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	EOT @ 5634'	TA @ 5505'

30. TUBING RECORD

31. PERFORATION RECORD (Interval, size and number)

INTERVAL	SIZE	SPF/NUMBER
(CP1&2) 5528'-40', 5562'-80'	.46"	4/120
(C) 4853'-4859'	.43"	4/24

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
5528'-5580'	Frac w/ 150,806# 20/40 sand in 1030 bbls fluid
4853'-4859'	Frac w/ 25,499# 20/40 sand in 336 bbls fluid

33.\* PRODUCTION

DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping--size and type of pump)	WELL STATUS (Producing or shut-in)					
4/5/06	2-1/2" x 1-1/2" x 14' RHAC SM Plunger Pump	PRODUCING					
DATE OF TEST	HOURS TESTED	CHOKED SIZE	PROD'N. FOR TEST PERIOD	OIL--BBL.	GAS--MCF	WATER--BBL.	GAS-OIL RATIO
30 day ave			----->	23	7	47	304
FLOW, TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL--BBL.	GAS--MCF	WATER--BBL.	OIL GRAVITY-API (CORR.)	
		----->					

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)

Sold & Used for Fuel

TEST WITNESSED BY

35. LIST OF ATTACHMENTS

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

*M. L. ...*

**RECEIVED**

**MAY 12 2006**

SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries);

38. GEOLOGIC MARKERS

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP	
					MEAS. DEPTH	TRUE VERT. DEPTH
			<b>Well Name Federal 2-8-9-18</b>	Garden Gulch Mkr	<b>3666'</b>	
				Garden Gulch 1	<b>3878'</b>	
				Garden Gulch 2	<b>3936'</b>	
				Point 3 Mkr	<b>4249'</b>	
				X Mkr	<b>4481'</b>	
				Y-Mkr	<b>4515'</b>	
				Douglas Creek Mkr	<b>4650'</b>	
				BiCarbonate Mkr	<b>4904'</b>	
				B Limestone Mkr	<b>5038'</b>	
				Castle Peak	<b>5452'</b>	
				Basal Carbonate	<b>5876'</b>	
				Total Depth (LOGGERS)	<b>5955'</b>	

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER: USA UTU-16540
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
7. UNIT or CA AGREEMENT NAME: SUNDANCE UNIT
8. WELL NAME and NUMBER: FEDERAL 2-8-9-18
9. API NUMBER: 4304736115
10. FIELD AND POOL, OR WILDCAT: MONUMENT BUTTE

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	
3. ADDRESS OF OPERATOR: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052	PHONE NUMBER 435.646.3721
4. LOCATION OF WELL: FOOTAGES AT SURFACE: 660 FNL 1980 FEL	
OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NWNE, 8, T9S, R18E	

COUNTY: UINTAH
STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 09/18/2008	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: -
	<input type="checkbox"/> CONVERT WELL TYPE	<input checked="" type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
The above subject well was recompleted and then placed back on production, attached is a daily status report. The following perforations were added in the Green River Formation: D2 4732'-4738' 4 JSPF 24 holes

NAME (PLEASE PRINT) <u>Jeniti Park</u>	TITLE <u>Production Tech</u>
SIGNATURE 	DATE <u>09/18/2008</u>

(This space for State use only)

**RECEIVED**  
**SEP 25 2008**  
DIV. OF OIL, GAS & MINING

## Daily Activity Report

Format For Sundry

**FEDERAL 2-8-9-18**

**6/1/2008 To 10/30/2008**

**8/21/2008 Day: 1**

**Recompletion**

NC #2 on 8/20/2008 - MIRU NC #2. Hot oiler pumped 60 BW @ 250° down csg. RD pumping unit. Unseat rod pump. Flush tbg & rods w/ 40 BW @ 250°. Soft seat rod pump. Fill tbg w/ 28 BW & attempt to pressure test, blew hole in tbg @ 2800 psi. TOH w/ rods as detailed below. LD 106- 3/4" plain rods due to planned changes in rod string. No scale was found on rods & rod pump looked good. X-over for tbg. ND wellhead. Release TA. NU BOPs. RU rig floor. PU 8- jts tbg & tag fill @ 5851'. TOH w/ tbg as detailed below, looking for hole. Found hole in jt #174, LD & replace jts # 169-178. RU Perforators LLC. RIH w/ 4.75" gauge ring to 4850'. POOH w/ gauge ring. RIH w/ Weatherford HE RBP & set plug @ 4825'. POOH w/ wireline. Fill csg w/ 115 BW & pressure test plug & csg to 2000 psi. Bleed off pressure. RIH w/ 6' perf gun. Perforate D2 sands from 4732- 4738' w/ 3 1/8" slick guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 24 holes. POOH w/ wireline. Pressure csg to 3000 psi attempting to brake down perfs w/o success. Wait for drum of acid. RU acid dump baler. RIH w/ acid baler & dump 10 gallons 15% HCL @ 4738'. POOH w/ wireline. Pressure csg & brake down D2 sands @ 3000 psi. Establish injection rate into perfs of 1950 psi @ 1/2 BPM. RD wireline & hot oiler. SDFN.

**8/22/2008 Day: 2**

**Recompletion**

NC #2 on 8/21/2008 - RU BJ services. NU BJ services isoation tool. 47 psi on well. Frac D2 sds down csg w/ 41,597#'s of 20/40 sand in 415 bbls of Lightning 17 fluid. Broke @ 1495 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 1780 psi @ ave rate of 23.1 BPM. ISIP 1912 psi. Flow well back @ 3 BPM starting w/ 28/64 choke. Flow well back until dead. Recovered 180 BW. ND BJ services isolation tool. TIH w/ HE RBP retrieving head, SN & 154- jts 2 7/8" J-55 tbg. TOH w/ 4- jts tbg. RU sandline to swab. Made 16 swab runs w/ SFL @ surface & EFL @ 3300'. Recovered total of 130 bbls w/ good show of gas, trace of oil & no show of sand. SDFN.

**8/23/2008 Day: 3**

**Recompletion**

NC #2 on 8/22/2008 - TIH & tag fill @ 4790'. Clean out to RBP @ 4825'. Circulate well clean. Latch onto & release HE RBP. TOOH w/ tbg & LD RBP. TIH w/ tbg as follows: 2 7/8" NC, 2- jts 2 7/8" J-55 tbg, SN (w/ standing valve), 2- jts 2 7/8" tbg, TA, 176- jts 2 7/8" J-55 tbg. Pressure test tbg w/ final test of 3000 psi. RU sandline & RIH w/ fishing tool on sandline & retrieve standing valve. RD sandline. Set TA @ 5497' w/ 16,000# tension. RD rig floor. ND BOPs. NU wellhead. Flush tbg w/ 60 BW @ 250°. PU & prime Central Hydraulic 2 1/2" X 1 3/4" X 17' X 20' RHAC rod pump. TIH w/ rods as follows: 6- 1 1/2" weight rods, 115- 3/4" guided rods, 100- 7/8" guided rods, 1- 6', 4', 2' X 7/8" pony rods, 1 1/2" X 26' polished rod. RU pumping unit. Fill tbg w/ 22 BW & test to 200 psi. Stroke test pump w/ unit to 800 psi. Good pump action. RD rig pump. RDMOSU. PWOP @ 4:30 PM w/ 86" SL & 5 SPM. Final Report!

**Pertinent Files: Go to File List**