

003



P.O. Box 164
Wellington, Utah 84542
435/637-4075 435/719-2019 Fax

March 21, 2005

Fluid Minerals Group
Bureau of Land Management
Vernal Field Office
170 South 500 East
Vernal, Utah 84078

RE: Application for Permit to Drill—Dominion Exploration & Production, Inc.
RBU 2-19F, 684' FNL, 1,823' FEL, NW/4 NE/4,
Section 19, T10S, R20E, SLB&M, Uintah County, Utah

Dear Fluid Minerals Group:

On behalf of Dominion Exploration & Production, Inc. (Dominion), Buys & Associates, Inc. respectfully submits the enclosed original and two copies of the *Application for Permit to Drill (APD)* for the above referenced well. Included with the APD is the following supplemental information:

Exhibit "A" - Survey plats, layouts and photos of the proposed well site;

Exhibit "B" - Proposed location maps with access and utility corridors;

Exhibit "C" - Production site layout;

Exhibit "D" - Drilling Plan;

Exhibit "E" - Surface Use Plan;

Exhibit "F" - Typical BOP and Choke Manifold diagram.

Please accept this letter as Dominion's, written request for confidential treatment of all information contained in and pertaining to this application.

Thank you very much for your timely consideration of this application. Please feel free to contact myself or Carla Christian of Dominion at 405-749-5263 if you have any questions or need additional information.

Sincerely,

Don Hamilton
Don Hamilton
Agent for Dominion

cc: Diana Whitney, Division of Oil, Gas and Mining
Carla Christian, Dominion
Marty Buys, Buys & Associates, Inc.

RECEIVED

MAR 22 2005

DIV. OF OIL, GAS & MINING

FILE COPY
CONFIDENTIAL

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

001

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
DRILL **DEEPEN**

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER
 SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
Dominion Exploration & Production, Inc.

3. ADDRESS AND TELEPHONE NO.
1400 Quail Springs Parkway, Suite 600, Oklahoma City, OK 73134, 405-749-5263

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. *)
 At surface: **684' FNL, 1,823' FEL NW/4 NE/4,**
 At proposed prod. zone: **684' FNL, 1,823' FEL NW/4 NE/4,**

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
10.48 miles southeast of Ouray, Utah

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drig. unit line, if any) **684'**

16. NO. OF ACRES IN LEASE **791.86**

17. NO. OF ACRES ASSIGNED TO THIS WELL **40 acres**

18. DISTANCE FROM PROPOSED LOCATION TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. **1,214'**

19. PROPOSED DEPTH **8,450'**

20. ROTARY OR CABLE TOOLS
Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.) **5,177' GR**

22. APPROX. DATE WORK WILL START*
August 15, 2005

5. LEASE DESIGNATION AND SERIAL NO.
U-013769-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A

7. UNIT AGREEMENT NAME
River Bend Unit

8. FARM OR LEASE NAME, WELL NO.
RBU 2-19F

9. API WELL NO.
43-047-36434

10. FIELD AND POOL, OR WILDCAT
Natural Buttes

11. SEC., T., R., M., OR BLK
**Section 19,
T10S, R20E, SLB&M**

12. COUNTY OR PARISH
Utah

13. STATE
Utah

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	8-5/8" J-55 ST&C	32#	2,000'	252 sks Lead, 219 sks, tail, 100 sks top out—see attached Drilling Plan
7-7/8"	5-1/2" Mav 80 LT&C	17#	8,450'	160 sks Lead, 435 sks Tail—see attached Drilling Plan

Bond Information:

Bond coverage is provided by Travelers Casualty and Surety Company of America, Bond #76S 63050 0330

Other Information:

Drilling Plan and Surface Use Plan are attached.
Dominion requests that this complete application for permit to drill be held confidential.

RECEIVED
MAR 22 2005

DIV. OF OIL, GAS & MINING

CONFIDENTIAL

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Don Hamilton Don Hamilton TITLE Agent for Dominion DATE March 21, 2005

(This space for Federal or State office use)
 PERMIT NO. 43-047-36434 APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 CONDITIONS OF APPROVAL, IF ANY:
 APPROVED BY Bradley G. Hill TITLE BRADLEY G. HILL
ENVIRONMENTAL SCIENTIST III DATE 03-24-05

***See Instructions On Reverse Side**


Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency or the

*Federal Approval of this
Action is Necessary*

T10S, R20E, S.L.B.&M.


DOMINION EXPLR. & PROD., INC.

Well location, RBU #2-19F, located as shown in the NW 1/4 NE 1/4 of Section 19, T10S, R20E, S.L.B.&M. Uintah County Utah.

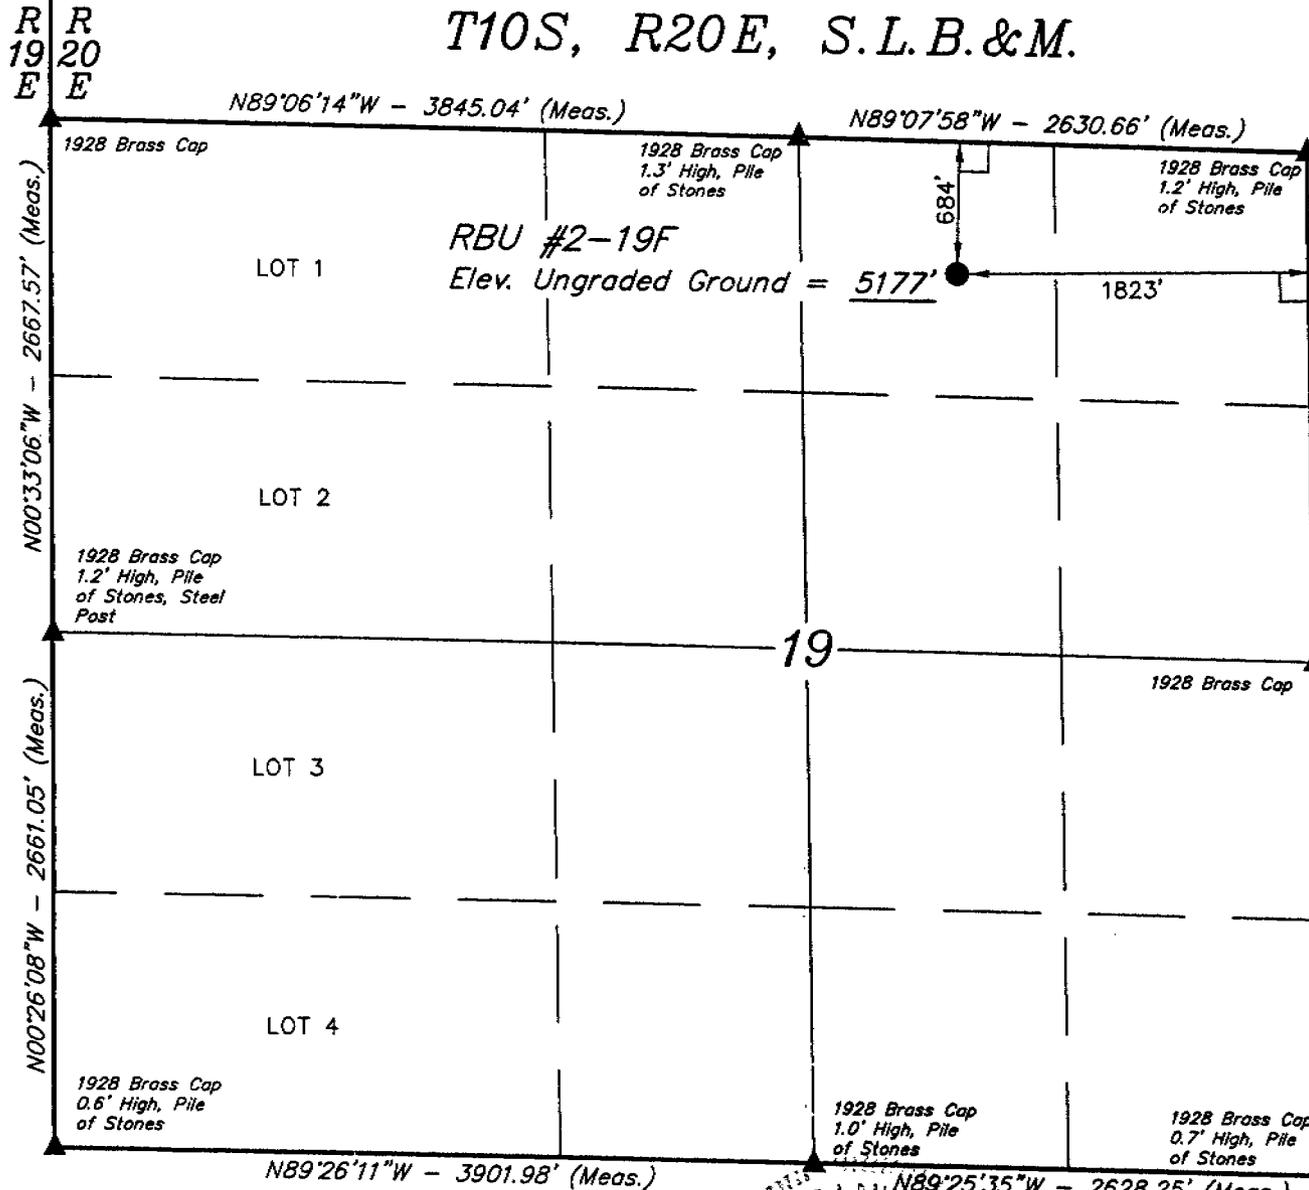

BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION 20, T10S, R20E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. NW QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5251 FEET.

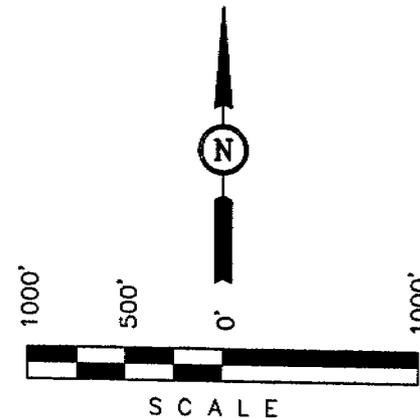

(NAD 83)
 LATITUDE = 39°56'17.22" (39.938117)
 LONGITUDE = 109°42'18.16" (109.705044)
 (NAD 27)
 LATITUDE = 39°56'17.35" (39.938153)
 LONGITUDE = 109°42'15.66" (109.704350)

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH
Fabian H. Hays

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 02-03-05	DATE DRAWN: 02-06-05
PARTY B.B. J.M. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE DOMINION EXPLR. & PROD., INC.	

DRILLING PLAN

APPROVAL OF OPERATIONS

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: RBU 2-19F
684' FNL & 1823' FEL
Section 19-10S-20E
Uintah County, UT

1. GEOLOGIC SURFACE FORMATION Uintah

2. ESTIMATED DEPTHS OF IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Wasatch Tongue	4,135'
Uteland Limestone	4,500'
Wasatch	4,650'
Chapita Wells	5,560'
Uteland Buttes	6,810'
Mesaverde	7,640'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth</u>	<u>Type</u>
Wasatch Tongue	4,135'	Oil
Uteland Limestone	4,500'	Oil
Wasatch	4,650'	Gas
Chapita Wells	5,560'	Gas
Uteland Buttes	6,810'	Gas
Mesaverde	7,640'	Gas

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.

<u>Type</u>	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Conn.</u>	<u>Top</u>	<u>Bottom</u>	<u>Hole</u>
Surface	8-5/8"	32.0 ppf	J-55	STC	0'	2,000'	12-1/4"
Production	5-1/2"	17.0 ppf	MAV-80	LTC	0'	8,450'	7-7/8"

Note: The drilled depth of the surface hole and the setting depth of the surface casing may vary from 1,700' to 2,000'. Should a lost circulation zone be encountered while drilling, casing will be set approximately 300' below the lost circulation zone. If no lost circulation zone is encountered, casing to be set at 2,000'±.

CONFIDENTIAL

DRILLING PLAN

APPROVAL OF OPERATIONS

5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

Surface hole: No BOPE will be utilized. Air foam mist, rotating head and diverter system will be utilized.

Production hole: Prior to drilling out the surface casing shoe, 3,000 psi or greater BOP equipment will be installed. The pipe rams will be operated at least once per day from intermediate casing to total depth. The blind rams will be tested once per day from intermediate casing to total depth if operations permit.

A diagram of the planned BOP equipment for normal drilling operations in this area is attached. As denoted there will be two valves and one check valve on the kill line, two valves on the choke line, and two adjustable chokes on the manifold system. The BOP "stack" will consist of two BOP rams (1 pipe, 1 blind) and one annular type preventer, all rated to a minimum of 3,000 psi working pressure.

The BOP equipment will be pressure tested prior to drilling below the intermediate casing shoe. All test pressures will be maintained for fifteen (15) minutes without any significant pressure decrease. Clear water will be circulated into the BOP stack and lines prior to pressure testing. The following test pressures will be used as a minimum for various equipment items.

1.	Annular BOP	1,500 psi
2.	Ram type BOP	3,000 psi
3.	Kill line valves	3,000 psi
4.	Choke line valves and choke manifold valves	3,000 psi
5.	Chokes	3,000 psi
6.	Casing, casinghead & weld	1,500 psi
7.	Upper kelly cock and safety valve	3,000 psi
8.	Dart valve	3,000 psi

6. MUD SYSTEMS

- An air or an air/mist system may be used to drill to drill the surface hole until water influx becomes too great.
- KCL mud system will be used to drill well.

<u>Depths</u>	<u>Mud Weight (ppg)</u>	<u>Mud System</u>
0' - 2,000'	8.4	Air foam mist, rotating head and diverter
2,000' - 8,450'	8.6	Fresh water/2% KCL/KCL mud system

7. BLOOIE LINE

- An automatic igniter will not be installed on blooie line. The blooie will have a contact ignition source.
- A "target tee" connection will be installed on blooie line for 90° change of directions for abrasion resistance.
- "Target tee" connections will be a minimum of 50' from wellhead.
- The blooie line discharge will be a minimum of 100' from the wellhead.

8. AUXILIARY EQUIPMENT TO BE USED

- a. Kelly cock.
- b. Full opening valve with drill pipe connection will be kept on floor. Valve will be used when the kelly is not in string.

9. TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED

- A drillstem test in the Wasatch Tongue is possible.
- One electric line wire-log will be run from total depth to surface casing.
- The gamma ray will be left on to record from total depth to surface casing.
- Other log curves (resistivities, porosity, and caliper) will record from total depth to surface casing.
- A dipmeter, percussion cores, or rotary cores may be run over selected intervals.

10. ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED

- Expected BHP 1,500-2,000 psi (lower than normal pressure gradient).
- No abnormal temperature or pressures are anticipated.
- The formations to be penetrated do not contain known H₂S gas.

CONFIDENTIAL

DRILLING PLAN

APPROVAL OF OPERATIONS

11. WATER SUPPLY

- No water pipelines will be laid for this well.
- No water well will be drilled for this well.
- Drilling water for this will be hauled on the road(s) shown in Attachment No. 3.
- Water will be hauled from: Water Permit # 43-10447 Section 9, Township 8 South, Range 20 East

12. CEMENT SYSTEMS

a. Surface Cement:

- Drill 12-1/4" hole to 2,000'±, run and cement 8-5/8" to surface (depth to vary based on depth of lost circulation zone).
- Pump 20 bbls lightly weighted water spacer followed by 5 bbls fresh water. Displace with any available water.
- Casing to be run with: a) guide shoe b) insert float c) three (3) centralizers, one on each of first 3 joints d) stop ring for plug two joints off bottom e) bottom three joints thread locked f) pump job with bottom plug only.
- Cement the casing annulus to surface. Top out jobs to be performed if needed. Depending to depth of top of cement in the annulus, a 1" tubing string may or may not be utilized.

<u>Type</u>	<u>Sacks</u>	<u>Interval</u>	<u>Density</u>	<u>Yield</u>	<u>Hole</u> <u>Volume</u>	<u>Cement</u> <u>Volume</u>	<u>Excess</u>
Lead	252	0'-1,500'	11.0 ppg	3.82 CFS	619 CF	835 CF	35%
Tail	219	1,500'-2,000'	15.6 ppg	1.18 CFS	220 CF	297 CF	35%
Top Out	100	0'-200'	15.6 ppg	1.18 CFS	95 CF	118 CF	24% (if required)

Lead Mix: Premium Plus V blend. Blend includes Class "G" cement, gel, salt, gilsonite.
Slurry yield: 3.82 cf/sack Slurry weight: 11.00 #/gal.
Water requirement: 22.95 gal/sack

Tail Mix: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
Slurry yield: 1.18 cf/sack Slurry weight: 15.60 #/gal.
Water requirement: 5.2 gal/sack

Top Out: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
Slurry yield: 1.18 cf/sack Slurry weight: 15.60 #/gal.
Water requirement: 5.2 gal/sack

c. Production Casing Cement:

- Drill 7-7/8" hole to 8,450'±, run and cement 5 1/2".
- Cement interface is at 4,000', which is typically 500'-1,000' above shallowest pay.
- Pump 20 bbl Mud Clean II unweighted spacer, followed by 20 Bbls fresh H2O spacer.
- Displace with 3% KCL.

<u>Type</u>	<u>Sacks</u>	<u>Interval</u>	<u>Density</u>	<u>Yield</u>	<u>Hole</u> <u>Volume</u>	<u>Cement</u> <u>Volume</u>	<u>Excess</u>
Lead	160	3,700'-4,700'	11.5 ppg	3.12 CFS	175 CF	350 CF	100%
Tail	435	4,700'-8,450'	13.0 ppg	1.75 CFS	473 CF	946 CF	100%

Note: A caliper log will be ran to determine cement volume requirements.

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
Slurry yield: 3.12 cf/sack Slurry weight: 11.60 #/gal.
Water requirement: 17.71 gal/sack
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Halliburton HLC blend (Prem Plus V/IB flyash). Blend includes Class "G" cement, KCl, EX-1, Halad 322, & HR-5.
Slurry yield: 1.75 cf/sack Slurry weight: 13.00 #/gal.
Water requirement: 9.09 gal/sack
Compressives @ 165°F: 905 psi after 24 hours

13. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS

Starting Date: August 15, 2005
Duration: 14 Days

SURFACE USE PLAN

CONDITIONS OF APPROVAL

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: RBU 2-19F
684' FNL & 1823' FEL
Section 19-10S-20E
Uintah County, UT

The dirt contractor will be provided with an approved copy of the surface use plan of operations before initiating construction.

The onsite inspection for the referenced well was conducted on Tuesday, March 1, 2005 at approximately 11:45 am. In attendance at the onsite inspection were the following individuals:

Ken Secrest	Foreman	Dominion E & P, Inc.
David Weston	Engineer	Uintah Engineering and Land Surveying
Randy Jackson	Foreman	Jackson Construction
Lonnie Hogan	Foreman	LaRose Construction
Stan Olmstead	Nat. Res. Prot. Spec.	Bureau of Land Management – Vernal
Don Hamilton	Permitting Agent	Buys & Associates, Inc.

1. Existing Roads:

- a. The proposed well site is located approximately 10.48 miles southeast of Ouray, UT.
- b. Directions to the proposed well site have been attached at the end of Exhibit B.
- c. The use of roads under State and County Road Department maintenance are necessary to access the River Bend Unit. However, an encroachment permit is not anticipated since no upgrades to the State or County Road system are proposed at this time.
- d. All existing roads will be maintained and kept in good repair during all phases of operation.
- e. Vehicle operators will obey posted speed restrictions and observe safe speeds commensurate with road and weather conditions.
- f. Since no improvements are anticipated to the State, County, Tribal or BLM access roads no topsoil striping will occur.
- g. An off-lease federal Right-of-Way is not anticipated for the access road or utility corridor since both are located within the existing River Bend Unit boundary.

2. Planned Access Roads:

- a. From the existing road that accesses the RBU 7-19F an access is proposed trending northeast approximately 0.2 miles to the proposed well site. The access consists of entirely new disturbance and crosses no significant drainages. A road design plan is not anticipated at this time.
- b. The proposed access road will consist of a 14' travel surface within a 30' disturbed area.
- c. BLM approval to construct and utilize the proposed access road is requested with this application.
- d. A maximum grade of 10% will be maintained throughout the project with no cuts and fills required to access the well.
- e. No turnouts are proposed since the access road is only 0.2 miles long and adequate site distance exists in all directions.
- f. No culverts or low water crossings are anticipated. Adequate drainage structures will be incorporated into the road.
- g. No surfacing material will come from federal or Indian lands.
- h. No gates or cattle guards are anticipated at this time.
- i. Surface disturbance and vehicular travel will be limited to the approved location access road.
- j. All access roads and surface disturbing activities will conform to the standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, (1989).
- k. The operator will be responsible for all maintenance of the access road including drainage structures.

3. Location of Existing Wells:

- a. Following is a list of existing wells within a one mile radius of the proposed well:
 - i. Water wells None
 - ii. Injection wells None
 - iii. Disposal wells None
 - iv. Drilling wells None
 - v. Temp. shut-in wells 4
 - vi. Producing wells 24
 - vii. Abandon wells 2
- b. Exhibit B has a map reflecting these wells within a one mile radius of the proposed well.

4. Location of Production Facilities:

- a. All permanent structures will be painted a flat, non-reflective Desert Brown to match the standard environmental colors. All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) may be excluded.
- b. Site security guidelines identified in 43 CFR 3163.7-5 and Onshore Oil and Gas Order No. 3 will be adhered to.
- c. A gas meter run will be constructed and located on lease within 500 feet of the wellhead. Meter runs will be housed and/or fenced. All gas production and measurement shall comply with the provisions of 43 CFR 3162.7-3, Onshore Oil and Gas Order No. 5, and American Gas Association (AGA) Report No. 3.
- d. A tank battery will be constructed on this location; it will be surrounded by a dike of sufficient capacity to contain the storage capacity of the largest tank. All loading lines and valves will be placed inside the berm surrounding the tank battery. All liquid hydrocarbons production and measurement shall conform to the provisions of 43 CFR 3162.7-3 and Onshore Oil and Gas Order No. 4 and Onshore Oil and Gas Order No. 5 for natural gas production and measurement.
- e. Any necessary pits will be properly fenced to prevent any wildlife and livestock entry.
- f. All access roads will be maintained as necessary to prevent erosion and accommodate year-round traffic. The road will be maintained in a safe useable condition.
- g. The site will require periodic maintenance to ensure that drainages are kept open and free of debris, ice, and snow, and that surfaces are properly treated to reduce erosion, fugitive dust, and impacts to adjacent areas.
- h. A gas pipeline is associated with this application and is being applied for at this time. The proposed gas pipeline corridor will leave the southeast side of the well site and traverse 858' southeast to the existing 2" pipeline that serves the RBU 7-19F.
- i. The existing 2" pipeline will be upgraded to 4" to the existing 4" pipeline near the RBU 1-19F.
- j. The new gas pipeline will be a 4" steel surface line within a 20' wide utility corridor. The use of the proposed well site and access roads will facilitate the staging of the pipeline construction. A new pipeline length of approximately 858' is associated with this well.
- k. Dominion intends on installing the pipeline on the surface by welding many joints into long lengths, dragging the long lengths into position and then completing a final welding pass to join the long lengths together. Dominion intends on connecting the pipeline together utilizing conventional welding technology.

5. Location and Type of Water Supply:

- a. The location and type of water supply has been addressed as number 11 within the previous drilling plan information.

6. Source of Construction Material:

- a. The use of materials will conform to 43 CFR 3610.2-3.
- b. No construction materials will be removed from Ute Tribal or BLM lands.
- c. If any gravel is used, it will be obtained from a state approved gravel pit.

7. Methods of Handling Waste Disposal:

- a. All wastes associated with this application will be contained and disposed of utilizing approved facilities.
- b. Drill cuttings will be contained and buried on site.
- c. The reserve pit will be located outboard of the location and along the northeast side of the pad.
- d. The reserve pit will be constructed so as not to leak, break, or allow any discharge.
- e. The reserve pit will be lined with 12 mil minimum thickness plastic nylon reinforced liner material. The liner will overlay a felt liner pad only if rock is encountered during excavation. The pit liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. Pit walls will be sloped no greater than 2:1. A minimum 2-foot freeboard will be maintained in the pit at all times during the drilling and completion operation.
- f. The reserve pit has been located in cut material. Three sides of the reserve pit will be fenced before drilling starts. The fourth side will be fenced as soon as drilling is completed, and shall remain until the pit is dry. After the reserve pit has dried, all areas not needed for production will be rehabilitated.
- g. No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completion of the well.
- h. Trash will be contained in a trash cage and hauled away to an approved disposal site as necessary but no later than at the completion of drilling operations. The contents of the trash container will be hauled off periodically to the approved Uintah County Landfill near Vernal, Utah.
- i. Produced fluids from the well other than water will be produced into a test tank until such time as construction of production facilities is completed. Any spills of oil, gas, salt water or other produced fluids will be cleaned up and removed.
- j. After initial clean-up, a 400 bbl tank will be installed to contain produced waste water. This water will be transported from the tank to an approved Dominion disposal well for disposal.
- k. **Produced water from the production well will be disposed of at the RBU 13-11F or RBU 16-19F disposal wells in accordance with Onshore Order #7.**

- l. Any salts and/or chemicals, which are an integral part of the drilling system, will be disposed of in the same manner as the drilling fluid.
- m. Sanitary facilities will be on site at all times during operations. Sewage will be placed in a portable chemical toilet and the toilet replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Vernal Wastewater Treatment Facility in accordance with state and county regulations.

8. Ancillary Facilities:

- a. Garbage Containers and Portable Toilets are the only ancillary facilities proposed in this application.

9. Well Site Layout: (See Exhibit B)

- a. The well will be properly identified in accordance with 43 CFR 3162.6.
- b. Access to the well pad will be from the southeast.
- c. The pad and road designs are consistent with BLM specifications.
- d. A pre-construction meeting with responsible company representative, contractors and the BLM will be conducted at the project site prior to commencement of surface-disturbing activities. The pad and road will be construction-staked prior to this meeting.
- e. The pad has been staked at its maximum size of 355' X 200'; however it will be constructed smaller if possible, depending upon rig availability. Should the layout change, this application will be amended and approved utilizing a sundry notice.
- f. All surface disturbing activities, will be supervised by a qualified, responsible company representative who is aware of the terms and conditions of the APD and specifications in the approved plans.
- g. All cut and fill slopes will be such that stability can be maintained for the life of the activity.
- h. Diversion ditches will be constructed as shown around the well site to prevent surface waters from entering the well site area.
- i. The site surface will be graded to drain away from the pit to avoid pit spillage during large storm events.
- j. The stockpiled topsoil (first 6 inches or maximum available) will be stored in a windrow on the uphill side of the location to prevent any possible contamination. All topsoil will be stockpiled for reclamation in such a way as to prevent soil loss and contamination.
- k. Pits will remain fenced until site cleanup.
- l. The blooie line will be located at least 100 feet from the well head.

- m. Water injection may be implemented if necessary to minimize the amount of fugitive dust.

10. Plans for Restoration of the Surface:

- a. Site reclamation for a producing well will be accomplished for portions of the site not required for the continued operation of the well.
- b. The Operator will control noxious weeds along access road use authorizations, pipeline route authorizations, well sites, or other applicable facilities by spraying or mechanical removal. A list of noxious weeds may be obtained from the BLM or the appropriate County Extension Office. On Ute Tribal and BLM administered land, it is required that a Pesticide Use Proposal be submitted and approved prior to the application of herbicides, pesticides or possibly hazardous chemicals.
- c. Upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1. Once the reserve pit is dry, the plastic nylon reinforced liner shall be torn and perforated before backfilling of the reserve pit. The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours.
- d. The cut and fill slopes and all other disturbed areas not needed for the production operation will be top soiled and re-vegetated. The stockpiled topsoil will be evenly distributed over the disturbed area.
- e. Prior to reseeding the site, all disturbed areas, including the access road, will be scarified and left with a rough surface. The site will then be seeded and/or planted as prescribed by the BLM within the approval documents.

11. Surface and Mineral Ownership:

- a. Surface Ownership – Federal under the management of the Bureau of Land Management - Vernal Field Office, 170 South 500 East, Vernal, Utah 84078; 435-781-4400.
- b. Mineral Ownership – Federal under the management of the Bureau of Land Management - Vernal Field Office, 170 South 500 East, Vernal, Utah 84078; 435-781-4400.

12. Other Information:

- a. AIA Archaeological will conduct a Class III archeological survey. A copy of the report will be submitted under separate cover to the appropriate agencies by AIA Archaeological.
- b. Our understanding of the results of the onsite inspection are:
 - a. No drainage crossings that require additional State or Federal approval are being crossed.
 - b. A biological review by the BLM in the spring will be necessary to confirm the presence of threatened and endangered flora and fauna species.
 - c. No raptor habitat is known to exist within 1 mile of the proposed wellsite.

13. Operator's Representative and Certification

<u>Title</u>	<u>Name</u>	<u>Office Phone</u>
Company Representative (Roosevelt)	Mitchiel Hall	1-435-722-4521
Company Representative (Oklahoma)	Carla Christian	1-405-749-5263
Agent for Dominion	Don Hamilton	1-435-637-4075

Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exists; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Dominion Exploration & Production, Inc. and its contractors and subcontractors in conformity with this APD package and the terms and conditions under which it is approved. I also certify responsibility for the operations conducted on that portion of the leased lands associated with this application, with bond coverage being provided under Dominion's BLM bond. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Signature: Don Hamilton Date: 3-21-05

DOMINION EXPLR. & PROD., INC.

RBU #2-19F

SECTION 19, T10S, R20E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.1 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTH; TURN RIGHT AND PROCEED IN A NORTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN RIGHT AND PROCEED IN A NORTHWESTERLY DIRECTION APPROXIMATELY 0.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN LEFT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHWEST; FOLLOW ROAD FLAGS IN A NORTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE PROPOSED LOCATION.


TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 47.3 MILES.

DOMINION EXPLR. & PROD., INC.

LOCATION LAYOUT FOR

RBU #2-19F
SECTION 19, T10S, R20E, S.L.B.&M.
684' FNL 1823' FEL

Proposed Access Road

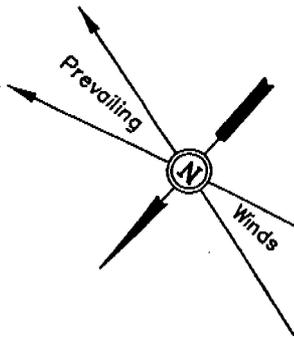


SCALE: 1" = 50'
DATE: 02-07-05
Drawn By: D.R.B.

C-1.0'
El. 65.2'

C-6.3'
El. 70.5'
Topsoil Stockpile

C-3.0'
El. 67.2'

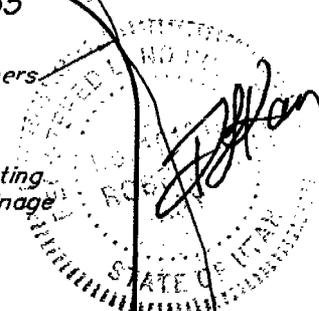

Sta. 3+55

Round Corners as Needed

Existing Drainage

Approx. Top of Cut Slope

Pit Topsoil

FLARE PIT

El. 78.0'
C-13.8'

El. 66.0'
C-9.8'
(btm. pit)

20' WIDE BENCH

El. 80.0'
C-15.8'

C-12.6'
El. 76.8'

RIG DOG HOUSE

135' Sta. 1+80

F-20.5'
El. 43.7'

Total Pit Capacity
W/2' of Freeboard
= 10,750 Bbls. ±
Total Pit Volume
= 3,120 Cu. Yds.

Sta. 1+10

10' WIDE BENCH

140'

Slope = 1-1/2:1

RESERVE PITS
(8' Deep)

Sta. 0+52

20' WIDE BENCH

El. 68.0'
C-11.8'
(btm. pit)

C-3.3'
El. 67.5'

Reserve Pit Backfill & Spoils Stockpile

Sta. 0+00

Approx. Toe of Fill Slope

F-10.0'
El. 54.2'

F-3.2'
El. 61.0'

F-4.6'
El. 59.6'

Elev. Ungraded Ground at Location Stake = 5176.8'
Elev. Graded Ground at Location Stake = 5164.2'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

DOMINION EXPLR. & PROD., INC.

TYPICAL CROSS SECTIONS FOR

RBU #2-19F


SECTION 19, T10S, R20E, S.L.B.&M.

684' FNL 1823' FEL



1" = 20'
X-Section
Scale
1" = 50'

DATE: 02-07-05
Drawn By: D.R.B.

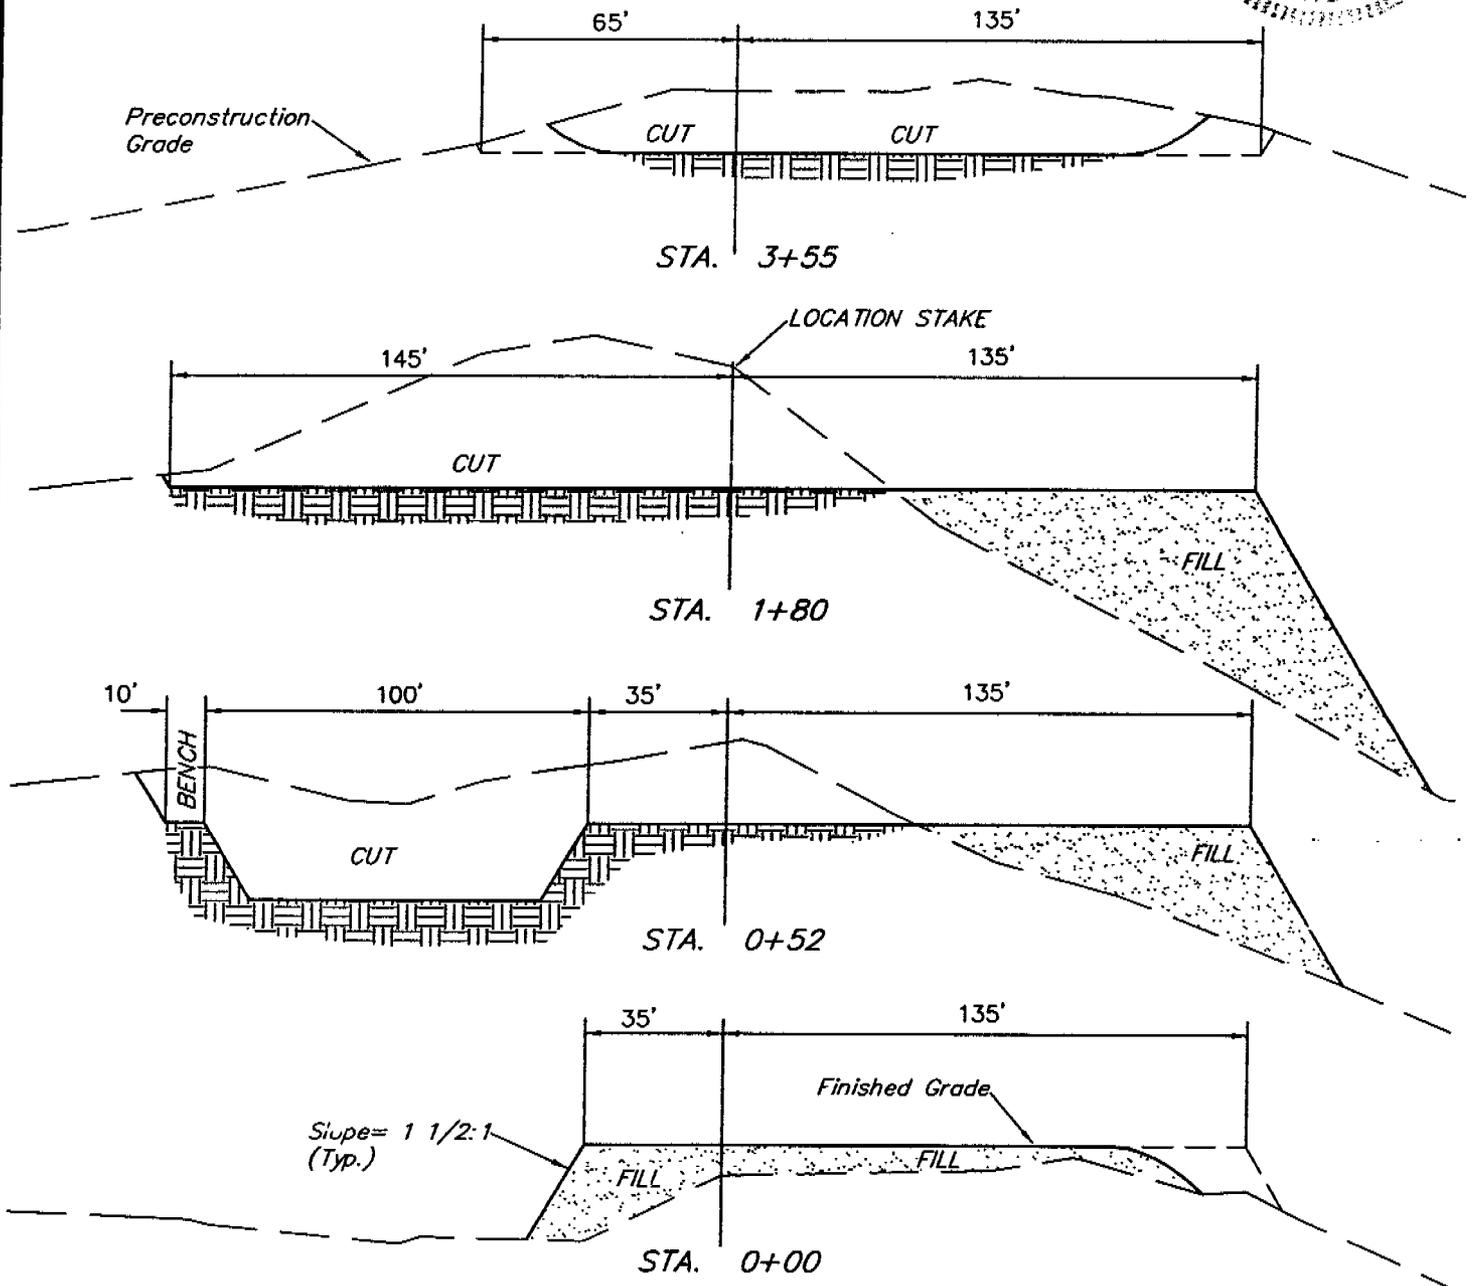

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,960 Cu. Yds.
Remaining Location	= 16,500 Cu. Yds.
TOTAL CUT	= 18,460 CU.YDS.
FILL	= 14,940 CU.YDS.

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION

EXCESS MATERIAL	= 3,520 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,520 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

DOMINION EXPLR. & PROD., INC.

RBU #2-19F

LOCATED IN UINTAH COUNTY, UTAH
SECTION 19, T10S, R20E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: NORTHWESTERLY



- Since 1964 -

Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@ueisinc.com

LOCATION PHOTOS	02	11	05	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: B.B.	DRAWN BY: C.P.		REVISED: 00-00-00	

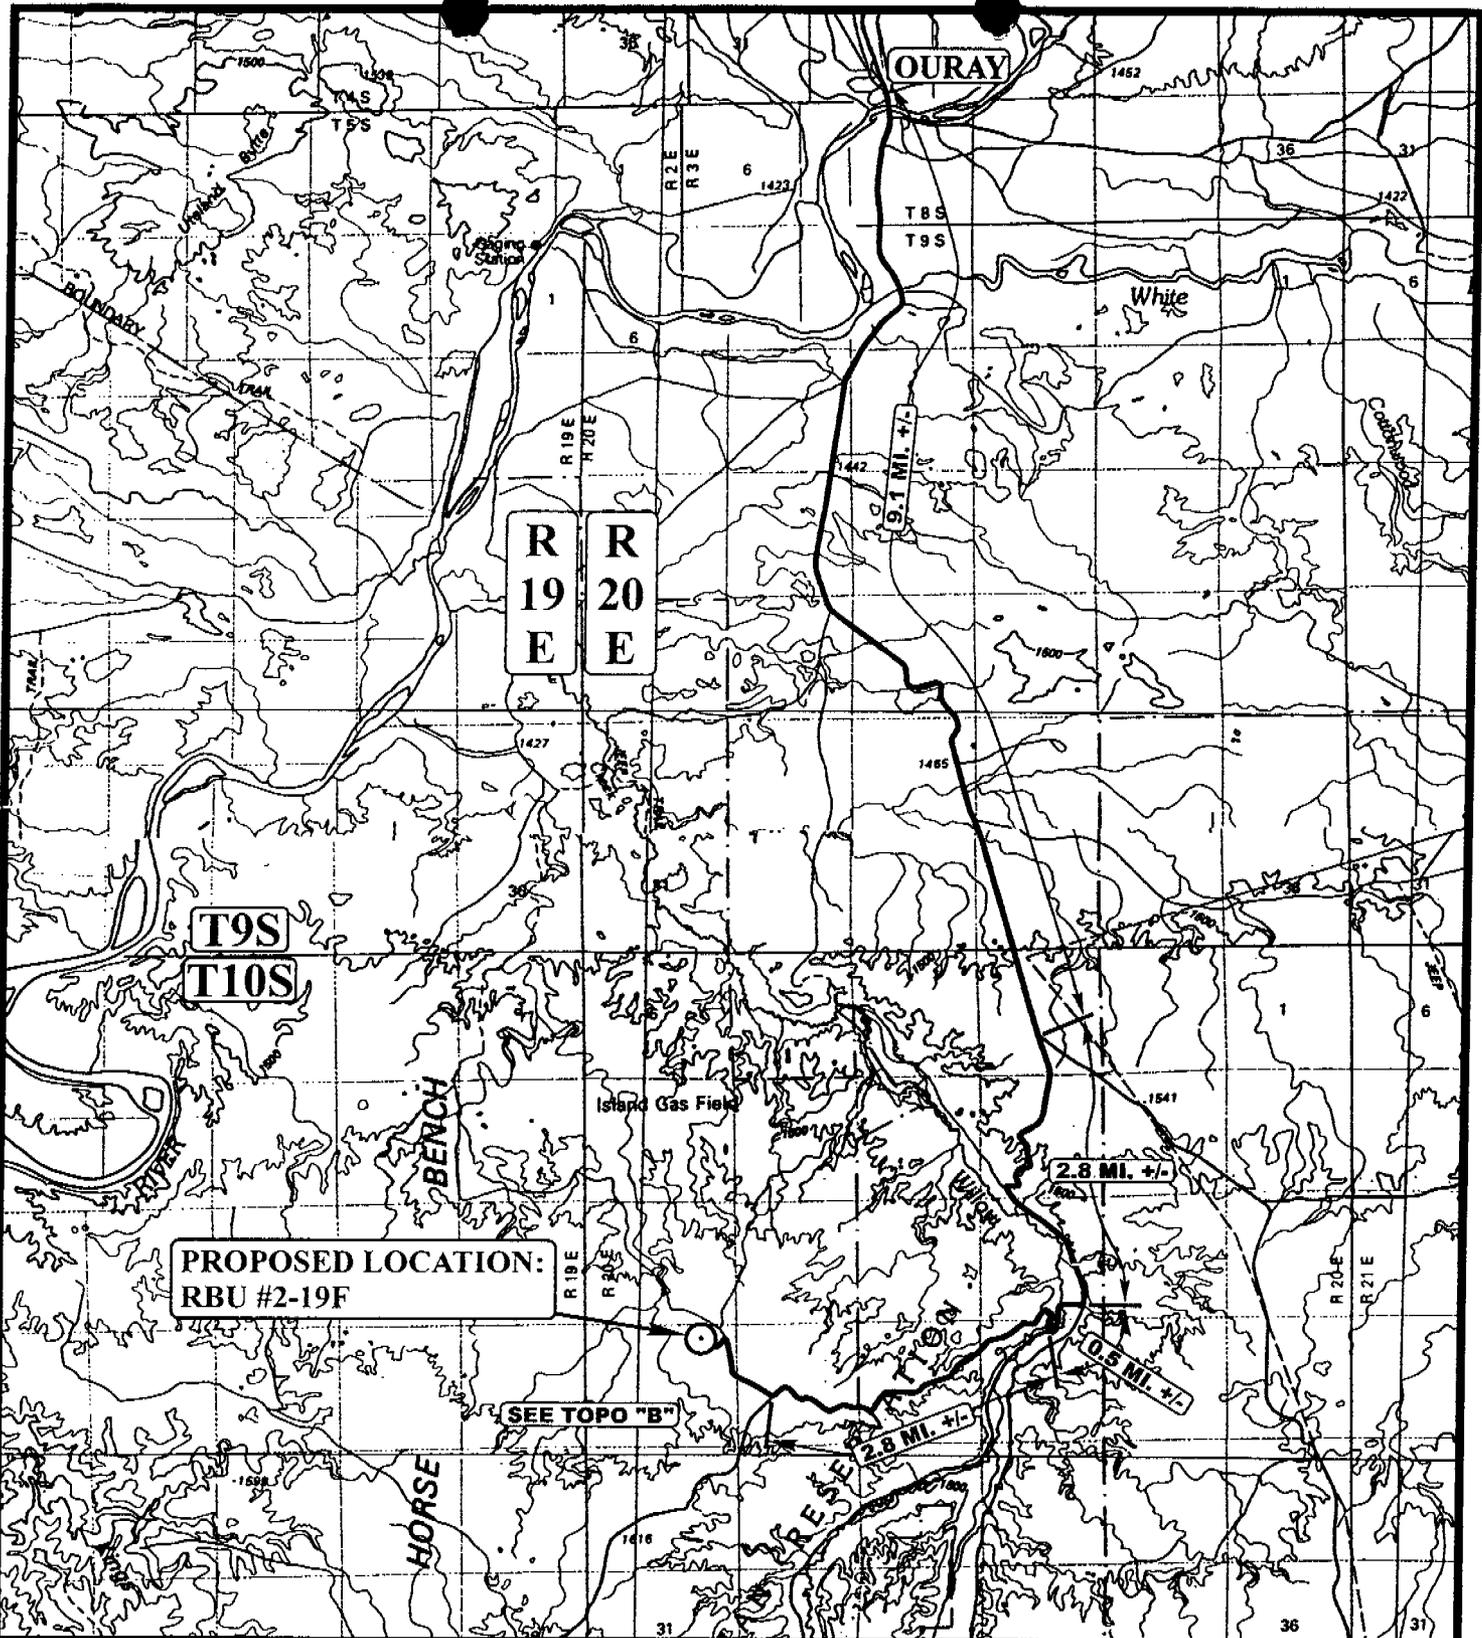

**PROPOSED LOCATION:
RBU #2-19F**

SEE TOPO "B"

LEGEND:

○ PROPOSED LOCATION



DOMINION EXPLR. & PROD., INC.

**RBU #2-19F
SECTION 19, T10S, R20E, S.L.B.&M.
684' FNL 1823' FEL**




Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP 02 11 05
MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: C.P. REVISED: 00-00-00



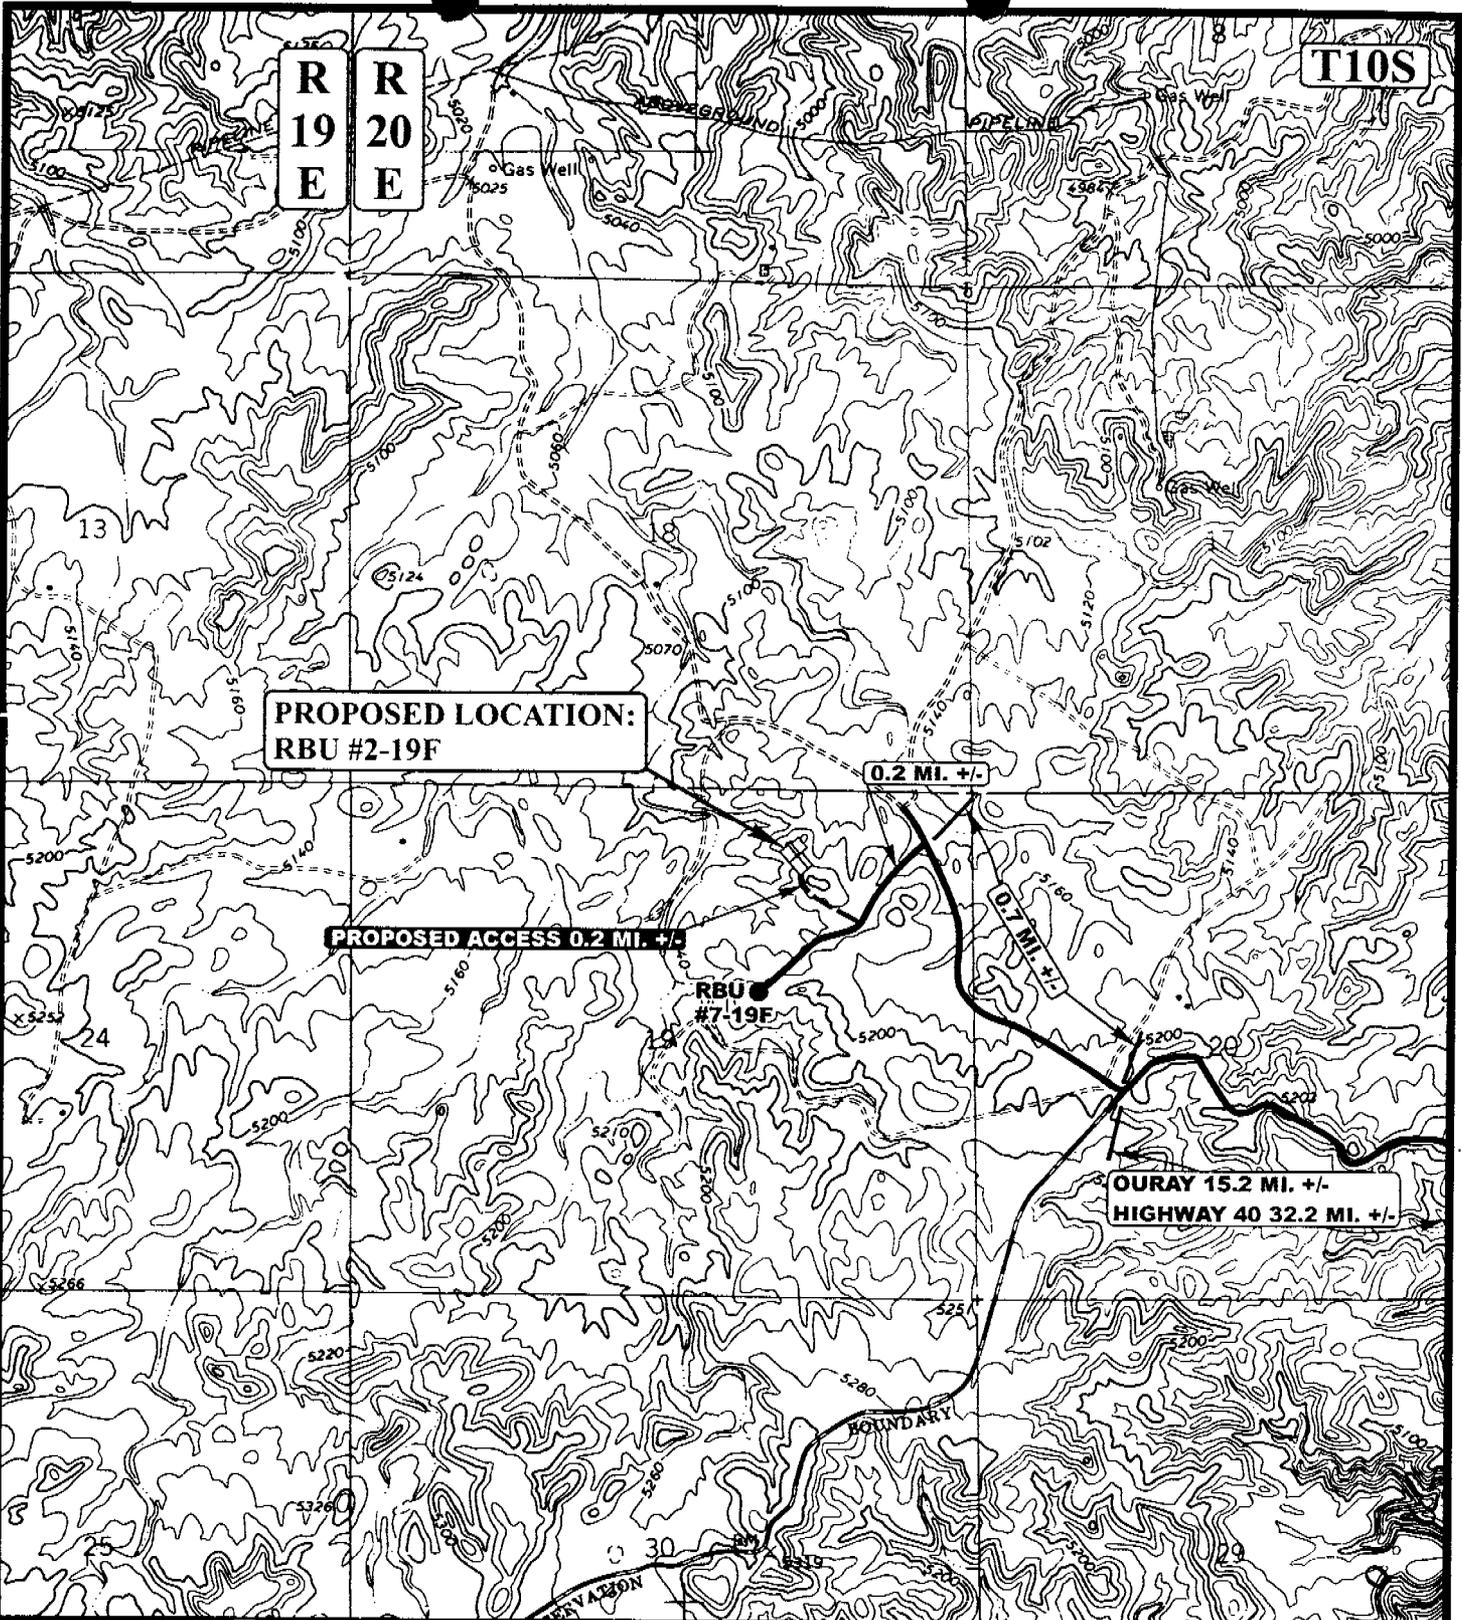

**PROPOSED LOCATION:
RBU #2-19F**

PROPOSED ACCESS 0.2 MI. +/-

RBU #7-19F

**OURAY 15.2 MI. +/-
HIGHWAY 40 32.2 MI. +/-**

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



DOMINION EXPLR. & PROD., INC.

**RBU #2-19F
SECTION 19, T10S, R20E, S.L.B.&M.
684' FNL 1823' FEL**




Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

02	11	05
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00

B
TOPO

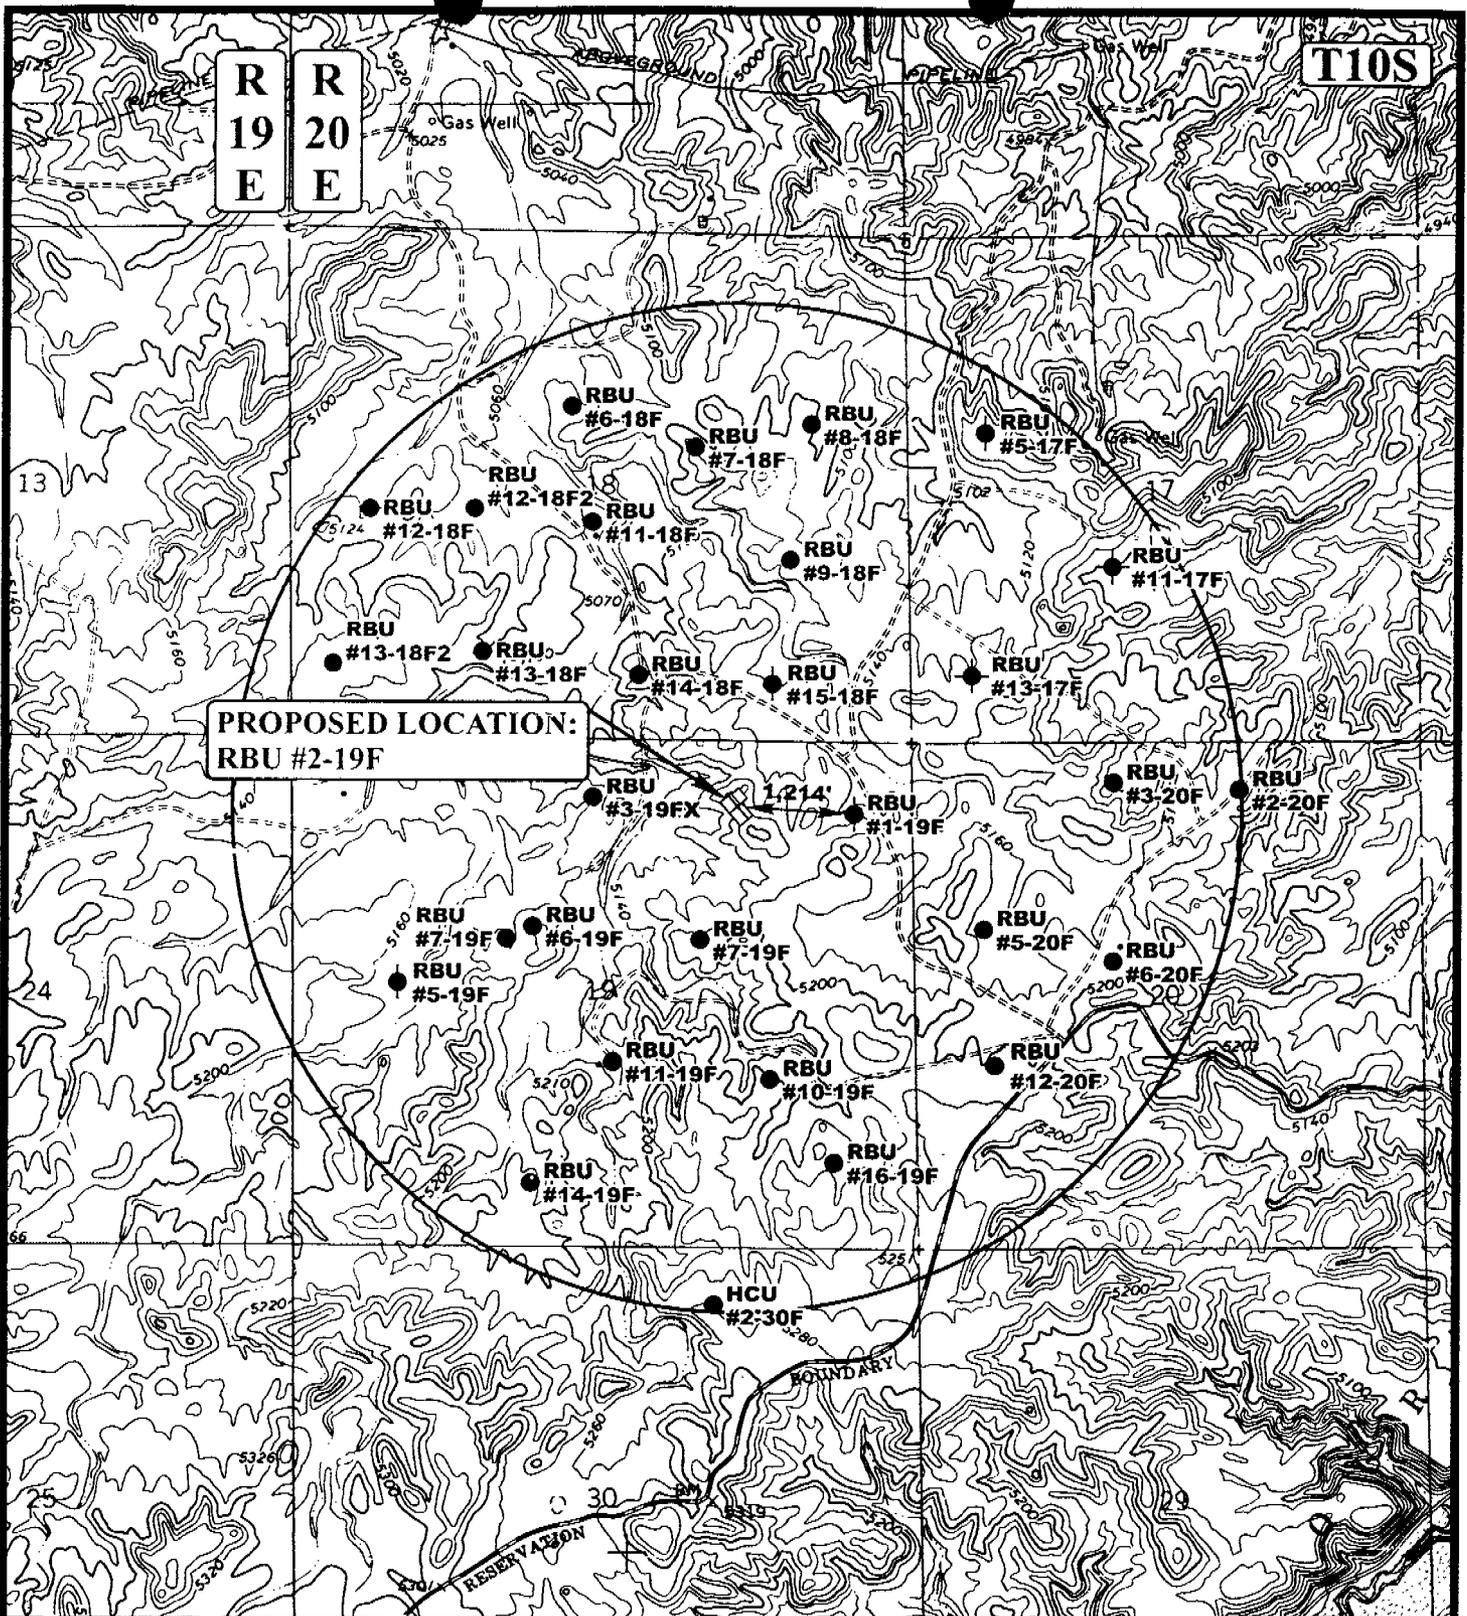

**PROPOSED LOCATION:
RBU #2-19F**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

DOMINION EXPLR. & PROD., INC.


RBU #2-19F
SECTION 19, T10S, R20E, S.L.B.&M.
684' FNL 1823' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 02 11 05
MAP MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



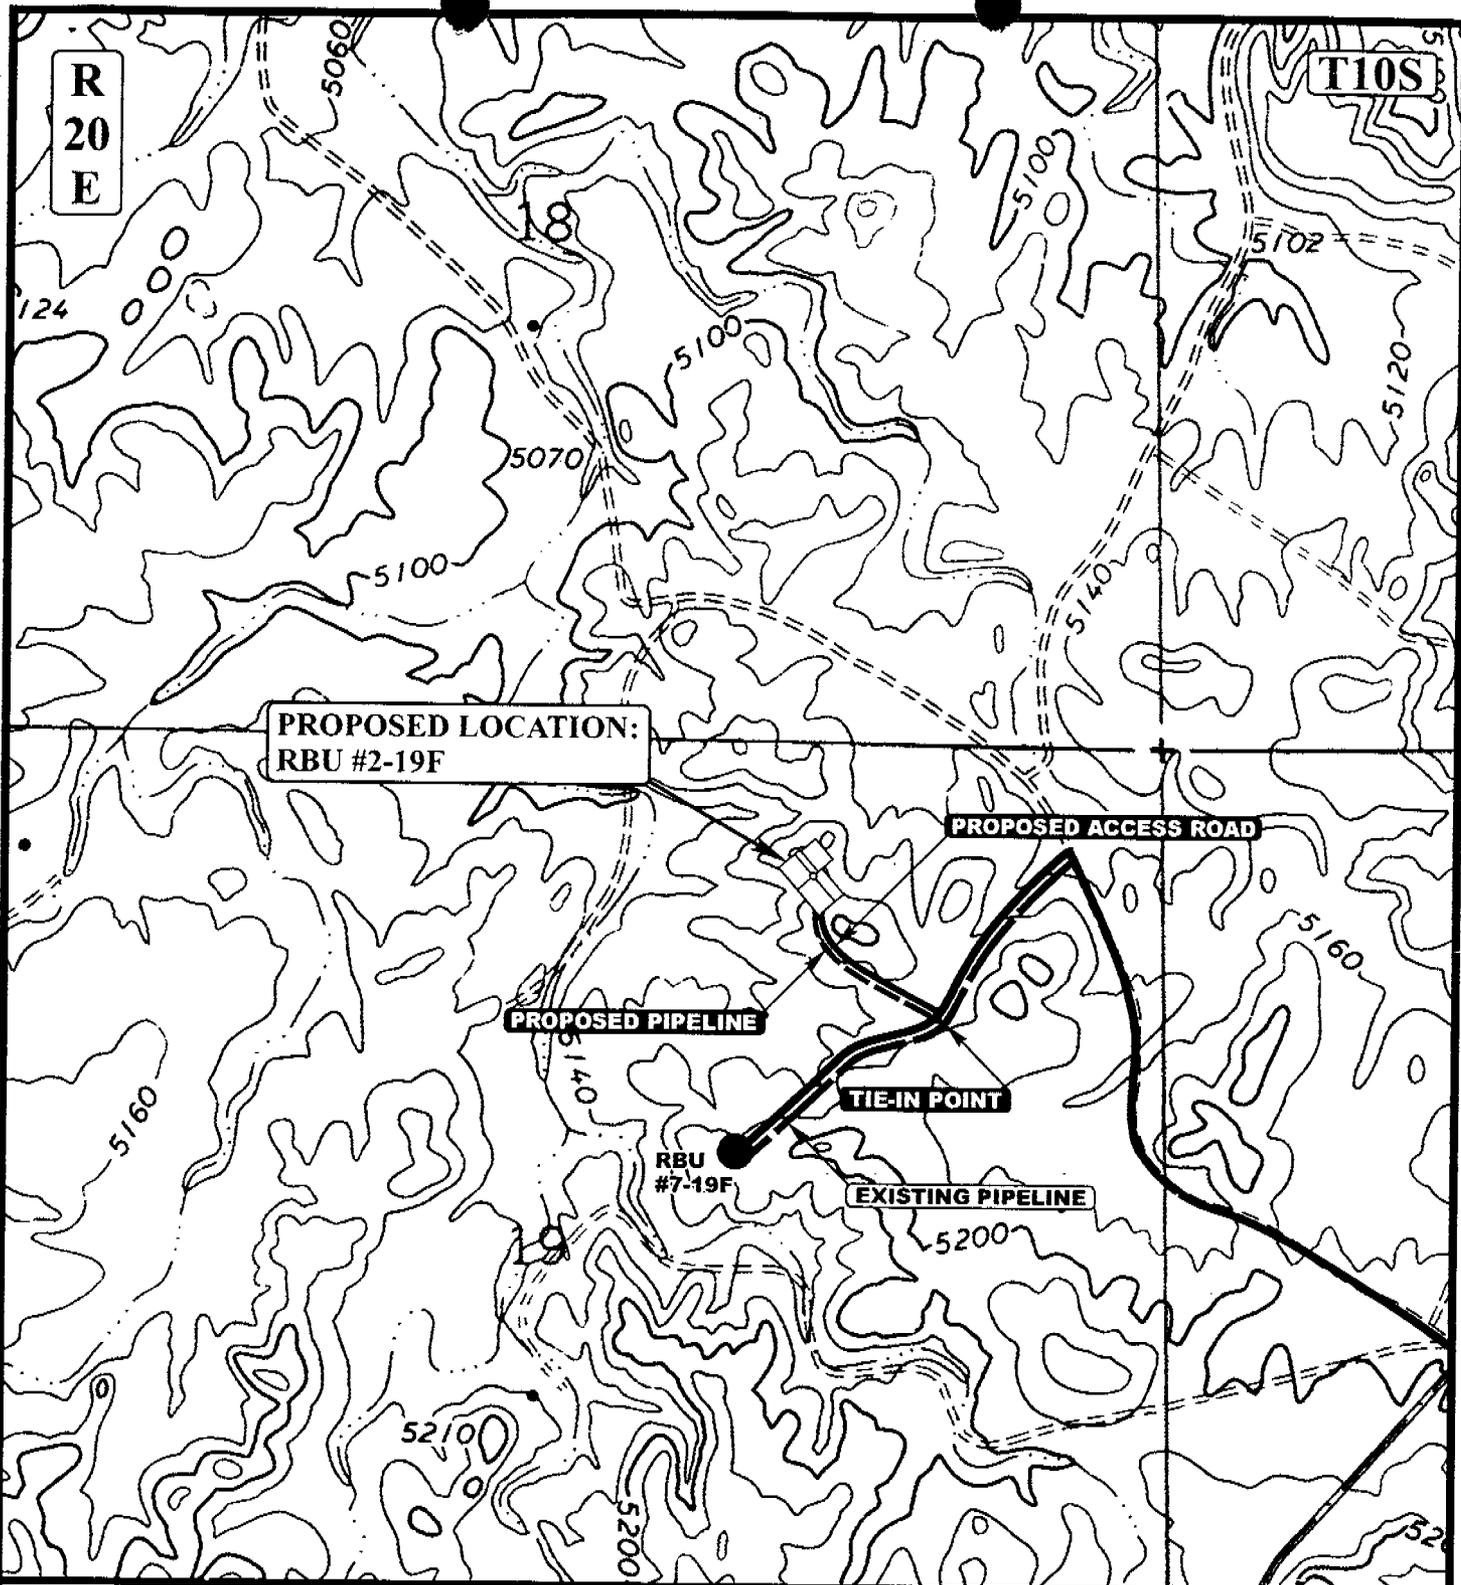

APPROXIMATE TOTAL PIPELINE DISTANCE = 858' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- - - - - PROPOSED PIPELINE

DOMINION EXPLR. & PROD., INC.

RBU #2-19F
 SECTION 19, T10S, R20E, S.L.B.&M.
 684' FNL 1823' FEL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC	02	11	05
MAP	MONTH	DAY	YEAR
SCALE: 1" = 1000'	DRAWN BY: C.P.		REVISED: 00-00-00

D
 TOPO

CONFIDENTIAL

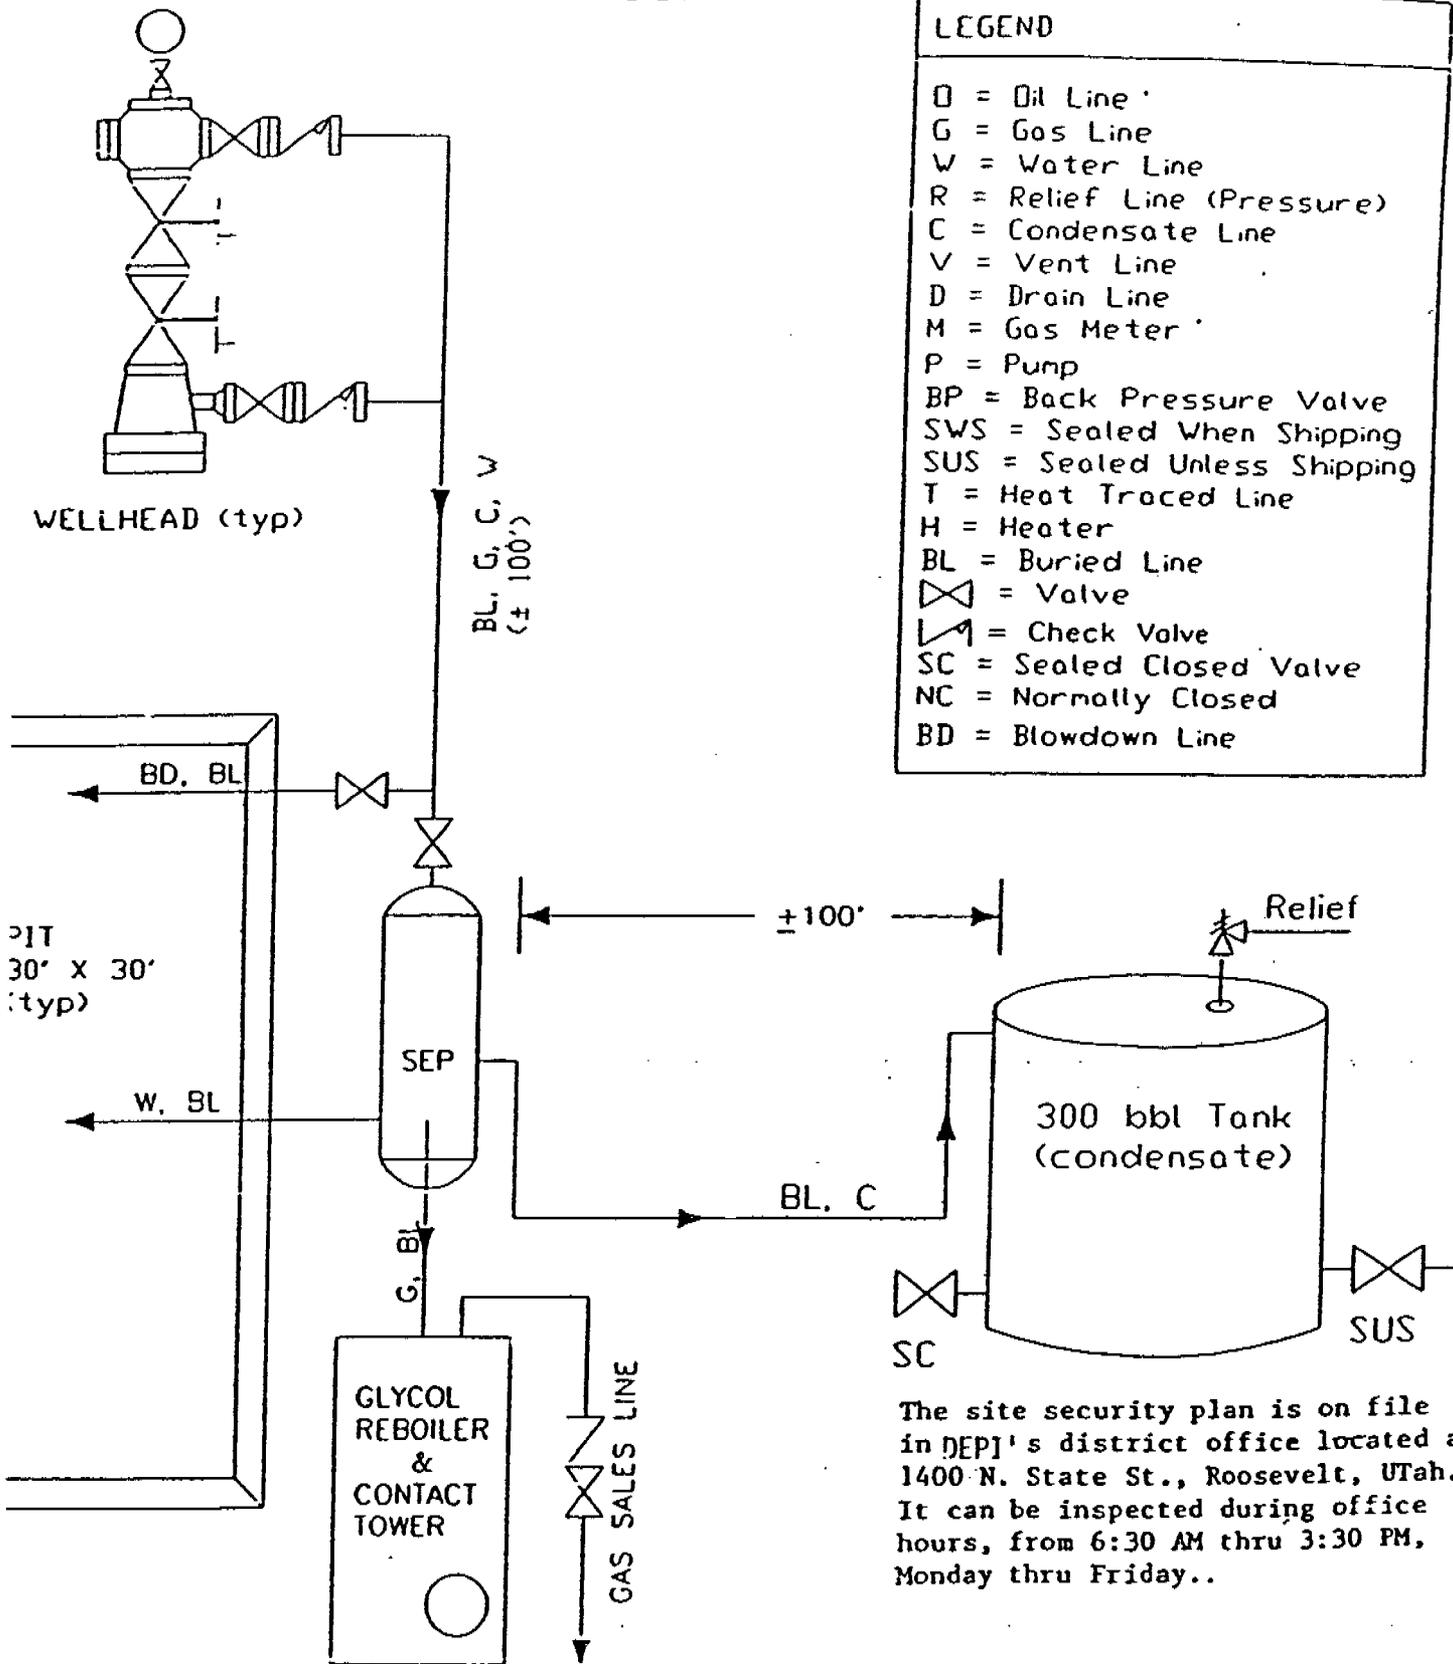

The site security plan is on file in DEPI's district office located at 1400 N. State St., Roosevelt, Utah. It can be inspected during office hours, from 6:30 AM thru 3:30 PM, Monday thru Friday..


DOMINION EXPLORATION & PRODUCTION, INC.

not to scale


TYPICAL FLOW DIAGRAM

Date: / /

BOP STACK

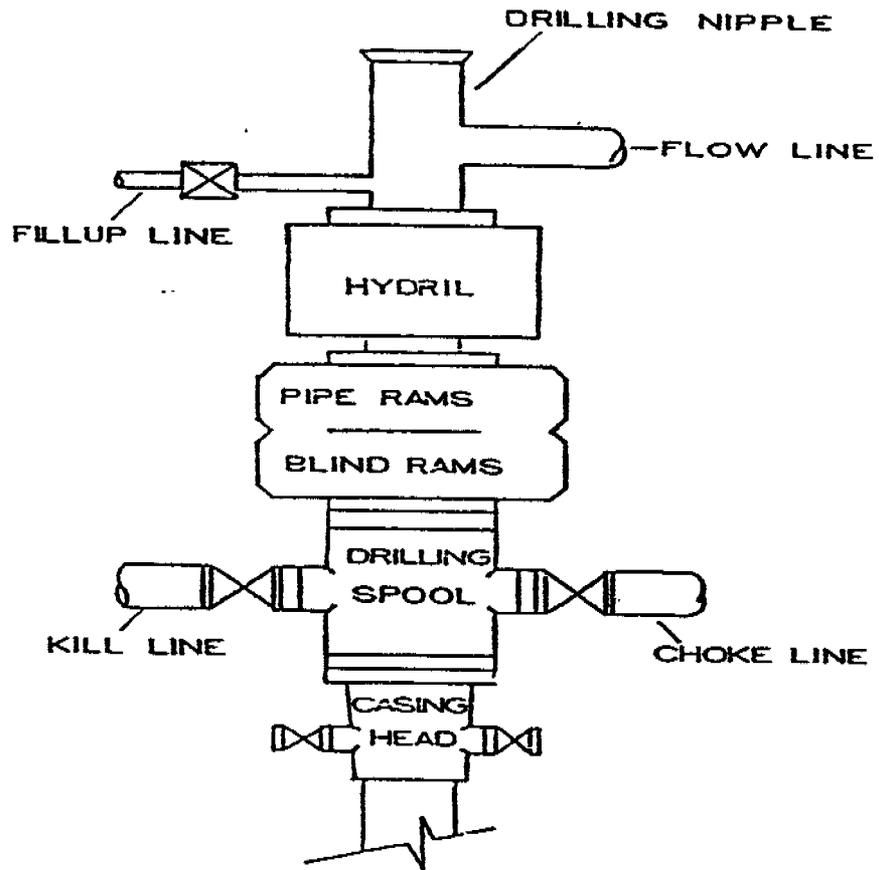

CHOKE MANIFOLD

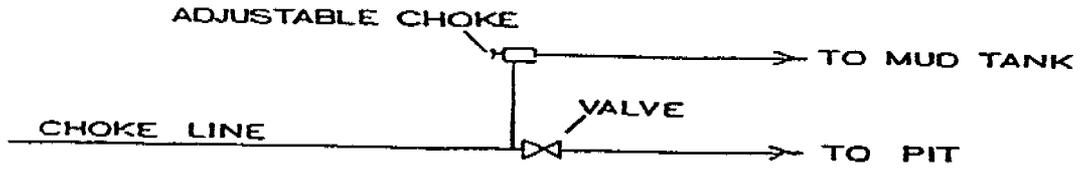

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 03/22/2005

API NO. ASSIGNED: 43-047-36434

WELL NAME: RBU 2-19F

OPERATOR: DOMINION EXPL & PROD (N1095)

CONTACT: DON HAMILTON

PHONE NUMBER: 435-650-1886

PROPOSED LOCATION:

NWNE 19 100S 200E

SURFACE: 0684 FNL 1823 FEL

BOTTOM: 0684 FNL 1823 FEL

UINTAH

NATURAL BUTTES (630)

LEASE TYPE: 1 - Federal

LEASE NUMBER: U-013769-A

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MVRD

COALBED METHANE WELL? NO

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LATITUDE: 39.93812

LONGITUDE: -109.7044

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. 76S630500330)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-10447)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)


LOCATION AND SITING:

- ___ R649-2-3.
- Unit RIVER BEND
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- ___ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- ___ R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:

1- Federal Approval
2- Spacing Strip
3- Oil SHALE

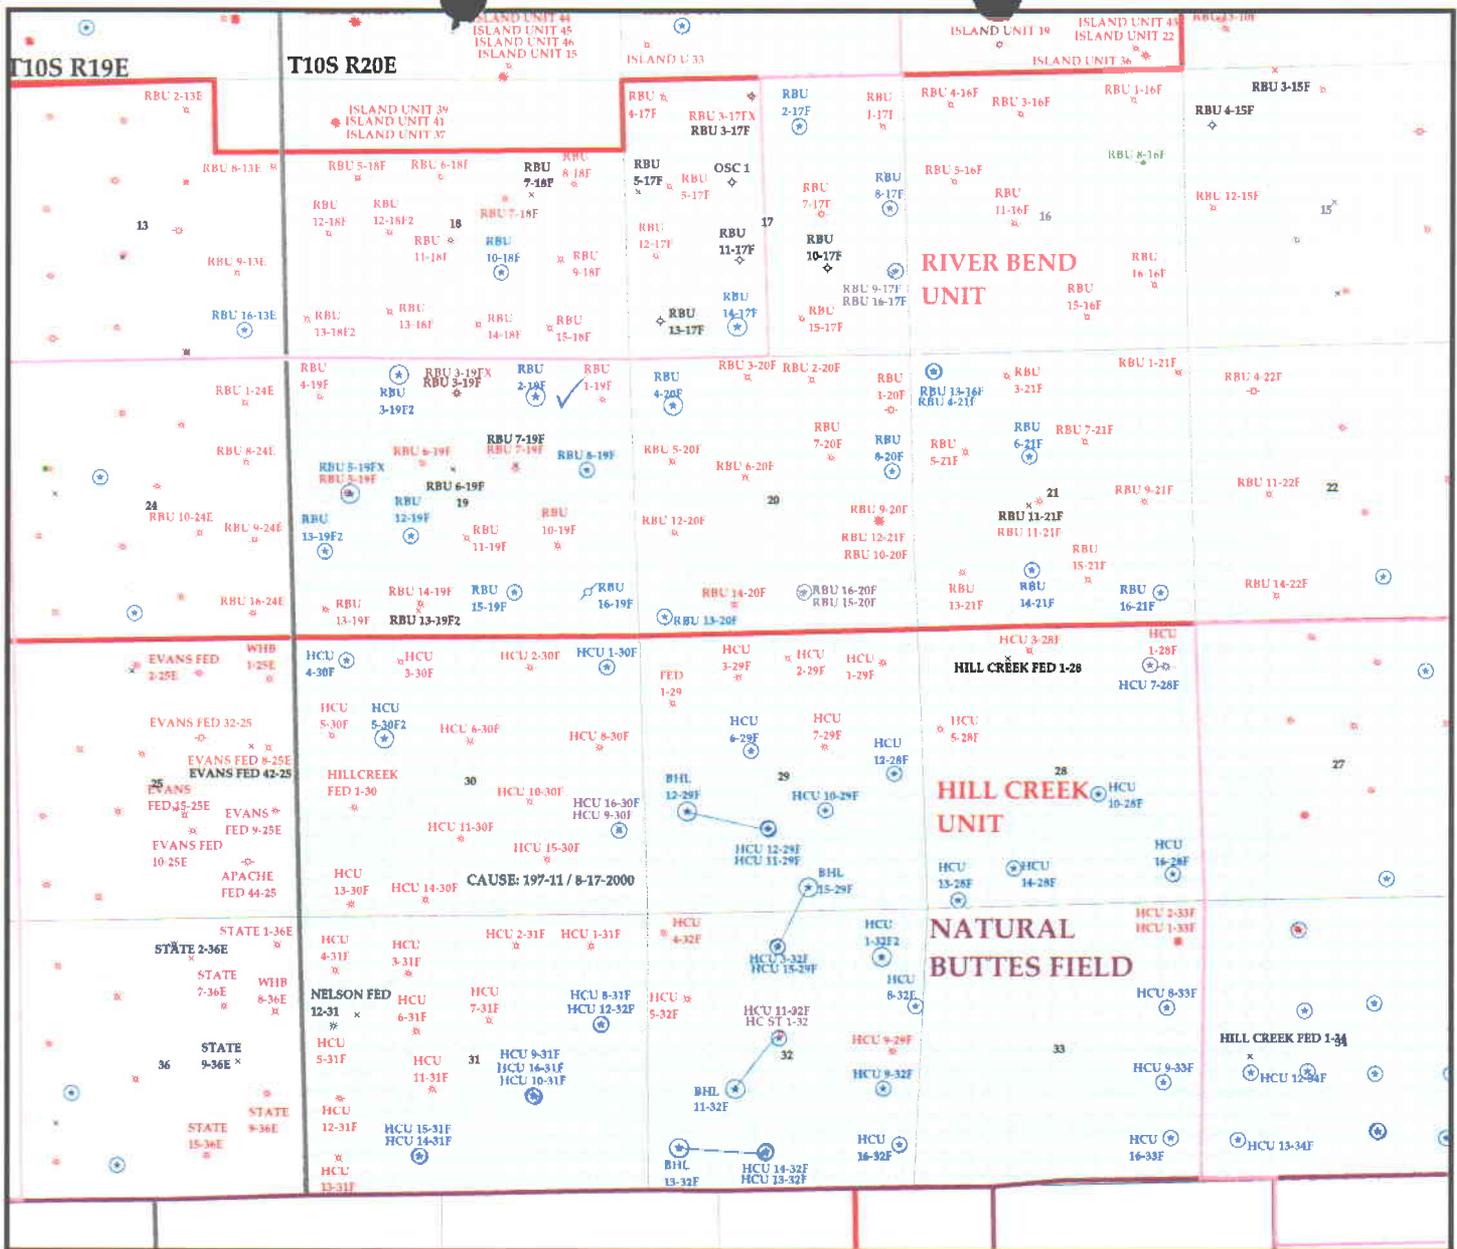

OPERATOR- DOMINION EXPL & PROD (N5160)

SEC. 19 T.10S R.20E

FIELD: NATUAL BUTTES (630)

COUNTY: UINTAH

SPACING: R649-3-2 / GENERAL SITING

Wells


- GAS INJECTION
- GAS STORAGE
- × LOCATION ABANDONED
- ⊕ NEW LOCATION
- ◇ PLUGGED & ABANDONED
- ★ PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- × TEMP. ABANDONED
- TEST WELL
- ⊕ WATER INJECTION
- ⊕ WATER SUPPLY
- ⊕ WATER DISPOSAL

Units.shp

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Fields.shp

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

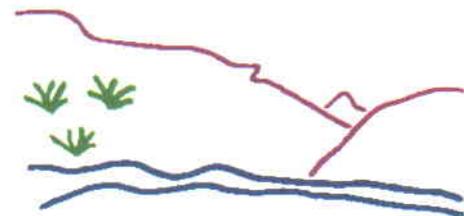

Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY
DATE: 23-MARCH-2005

**State of Utah****Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

MARY ANN WRIGHT
Acting Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

March 24, 2005

Dominion Exploration & Production, Inc.
14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134


Re: River Bend Unit 2-19F Well, 684' FNL, 1823' FEL, NW NE, Sec. 19,
T. 10 South, R. 20 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-36434.

Sincerely,

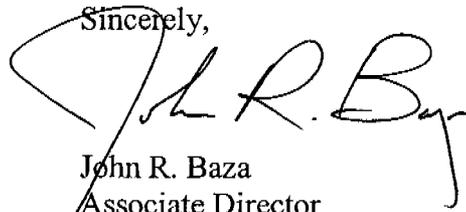

John R. Baza
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Page 2

API # 43-047-36434

March 24, 2005

6. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

March 24, 2005

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2005 Plan of Development River Bend Unit
Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2005 within the River Bend Unit, Uintah County, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ Mesaverde)		
43-047-36433	RBU 14-17F	Sec 17 T10S R20E 0605 FSL 2038 FWL
43-047-36432	RBU 3-19F2	Sec 19 T10S R20E 0276 FNL 2074 FWL
43-047-36435	RBU 5-19FX	Sec 19 T10S R20E 2557 FNL 1120 FWL
43-047-36434	RBU 2-19F	Sec 19 T10S R20E 0684 FNL 1823 FEL
43-047-36436	RBU 4-20F	Sec 20 T10S R20E 0883 FNL 0773 FWL
43-047-36426	RBU 7-9E	Sec 9 T10S R19E 1906 FSL 1597 FEL
43-047-36427	RBU 9-15E	Sec 15 T10S R19E 1750 FSL 0786 FEL
43-047-36429	RBU 1-17E	Sec 17 T10S R19E 0781 FNL 0990 FEL
43-047-36428	RBU 2-17E	Sec 17 T10S R19E 0816 FNL 2095 FEL
43-047-36430	RBU 16-20E	Sec 20 T10S R19E 1102 FSL 0442 FEL
43-047-36431	RBU 13-21E	Sec 20 T10S R19E 1097 FSL 0417 FEL
	BHL	Sec 21 T10S R19E 0450 FSL 0600 FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on Reverse Side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
 Dominion Exploration & Production, Inc.

3a. Address Suite 600
 14000 Quail Springs Parkway, OKC, OK 73134

3b. Phone No. (include area code)
 (405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
 684' FNL & 1823' FEL, Sec. 19-10S-20E

5. Lease Serial No.
 U-013769-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
 River Bend Unit

8. Well Name and No.
 RBU 2-19F

9. API Well No.
 43-047-36434

10. Field and Pool, or Exploratory Area
 Natural Buttes

11. County or Parish, State
 Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	APD Extension
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

The State APD for this well expires on March 24, 2006. Dominion is hereby requesting a one year extension.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 03-06-06
By: *[Signature]*

3-15-06
C.H.D.

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed) Carla Christian Title Regulatory Specialist

Signature *Carla Christian* Date 2/22/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by Title Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

FEB 27 2006

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-36434
Well Name: RBU 2-19F
Location: Section 19-10S-20E, 684' FNL & 1823' FEL
Company Permit Issued to: Dominion Exploration & Production, Inc.
Date Original Permit Issued: 3/24/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Carla Christian
Signature

2/22/2006
Date

Title: Sr. Regulatory Specialist

Representing: Dominion Exploration & Production, Inc.

FEB 27 2006

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: DOMINION EXPL & PROD INC

Well Name: RBU 2-19F

Api No: 43-047-36434 Lease Type: FEDERAL

Section 19 Township 10S Range 20E County UINTAH

Drilling Contractor BILL JRS RIG # 6

SPUDDED:

Date 03/12/06

Time 11:00 AM

How DRY

Drilling will Commence: _____

Reported by PAT WISENER

Telephone # 1-435-828-1455

Date 03/14/2006 Signed CHD

ENTITY ACTION FORM

Operator: Dominion Exploration & Production, Inc. Operator Account Number: N 1095
 Address: 14000 Quail Springs Parkway, Suite 600
city Oklahoma City
state Ok zip 73134 Phone Number: (405) 749-1300

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-36434	RBU 2-19F		NWNE	19	10S	20E	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
<i>XB</i>	<i>99999</i>	<i>7050</i>	<i>3/12/2006</i>		<i>3/23/06</i>		
Comments: <i>mVRD = WSMVD</i>							CONFIDENTIAL J

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Carla Christian

Name (Please Print)

Carla Christian

Signature

Sr. Regulatory Specialist

3/14/2006

Title

RECEIVED

Date

MAR 17 2006

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 3/22/2006 at 3:44:28 PM

Pages : 2 (including Cover)

Subject : RBU 2-19F

T109 R20E S-19

43-047-36434

RECEIVED

MAR 22 2006

DIV OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

WELL NAME : RBU 2-19F

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 684' FNL 1823' FEL SEC 19 T 10S R 20E

COUNTY & STATE : UINTAH

UT

CONTRACTOR : PATTERSON UTI

WI % : 100.00 AFE # : 0601169

API # : 43-047-36434

PLAN DEPTH : 8,450 SPUD DATE : 03/14/06

DHC : \$566,000

CWC : \$630,500

AFE TOTAL : \$1,196,500

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$260,522.64

EVENT CC : \$0.00

EVENT TC : \$260,522.64

WELL TOTL COST : \$292,596

REPORT DATE: 03/15/06

MD : 2,250

TVD : 2,250

DAYS : 0

MW :

VISC :

DAILY : DC : \$230,572.64

CC : \$0.00

TC : \$230,572.64

CUM : DC : \$230,572.64

CC : \$0.00

TC : \$230,572.64

DAILY DETAILS : MIRU BILL JR. SPUD WELL @ 6 A.M. 3/13/06. DRILLED 2250' OF 12.25" HOLE. RUN 52 JOINTS OF 8.625" 32#, J-55 CSG. SET @ 2213.90'. CEMENT WITH 250 SKS LEAD MIXED @ 11.0 PPG & 3.82 YLD. THEN 250 SKS TAIL MIXED @ 15.8 PPG & 1.15 YLD. CEMENT RETURNS / CEMENT FELL BACK. MIX & PUMP 200 SKS DOWN 200' OF 1 INCH @ 15.8 PPG & 1.15 YLD. 5 BBLS CEMENT TO PIT.

REPORT DATE: 03/22/06

MD : 2,250

TVD : 2,250

DAYS : 1

MW :

VISC :

DAILY : DC : \$29,950.00

CC : \$0.00

TC : \$29,950.00

CUM : DC : \$260,522.64

CC : \$0.00

TC : \$260,522.64

DAILY DETAILS : MOVE RIG F/ RBU 3-19F2 TO RBU 2-19F. RIG UP PATTERSON RIG 104 @ RBU 2-19F.

RECEIVED

MAR 22 2006

UTAH DIVISION OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

Submittal in triplicate. Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
 Dominion Exploration & Production, Inc.

3a. Address Suite 600
 14000 Quail Springs Parkway, OKC, OK 73134

3b. Phone No. (include area code)
 (405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
 684' FNL & 1823' FEL, Sec. 19-10S-20E

5. Lease Serial No.
 U-013769-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
 River Bend Unit

8. Well Name and No.
 RBU 2-19F

9. API Well No.
 43-047-36434

10. Field and Pool, or Exploratory Area
 Natural Buttes

11. County or Parish, State
 Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other Spud Well

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Spud well 3/12/06. 3/12/06 ran 52 jts. 8 5/8", 32#, J-55, ST&C csg., set @ 2214'. Cemented lead w/250 sks Hi-Fil "V", 3.82 cuft/sk, 11.0 ppg, tailed w/250 sks Class "G", 1.15 cuft/sk, 15.8 ppg., top off w/200 sks Class "G", 15.8 ppg, 1.15 yld, 5 bbls cmt. To pit.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Carla Christian Title Sr. Regulatory Specialist

Signature *Carla Christian* Date 3/22/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by Title Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

MAR 28 2006



WELL CHRONOLOGY REPORT

WELL NAME : RBU 2-19F

DISTRICT : WESTERN		FIELD : NATURAL BUTTES 630	Event No: 1
COUNTY & STATE : UINTAH		UT	LOCATION : 684' FNL 1823' FEL SEC 19 T 10S R 20E
WI % : 100.00	AFE # : 0601169	API # : 43-047-36434	CONTRACTOR :
DHC : \$566,000	CVC : \$630,500	AFE TOTAL : \$1,196,500	PLAN DEPTH : 8,450
EVENT DC : \$634,503.64	EVENT CC : \$0.00	EVENT TC : \$634,503.64	SPUD DATE : 03/14/06
			FORMATION : WASATCH/MESAVERDE
			WELL TOTL COST : \$666,577

REPORT DATE: 03/22/06 MD: 2,250 TVD: 2,250 DAYS: 1 MW: VISC:
 DAILY : DC : \$29,950.00 CC : \$0.00 TC : \$29,950.00 CUM : DC : \$260,522.64 CC : \$0.00 TC : \$260,522.64
 DAILY DETAILS : MOVE RIG F/ RBU 3-19F2 TO RBU 2-19F. RIG UP PATTERSON RIG 104 @ RBU 2-19F.

REPORT DATE: 03/23/06 MD: 4,279 TVD: 4,279 DAYS: 2 MW: 8.5 VISC: 26
 DAILY : DC : \$28,630.00 CC : \$0.00 TC : \$28,630.00 CUM : DC : \$289,152.64 CC : \$0.00 TC : \$289,152.64
 DAILY DETAILS : BOP TEST & DRILL. TEST KELLY, SAFETY VALVE, PIPE RAMS & CHOKE MANIFOLD TO 3000 PSI HIGH & 250 PSI LOW. TEST ANNULAR PREVENTER & SURFACE CASING TO 1500 PSI HIGH & 250 PSI LOW @ 0600 HRS (06:00 A.M.) 3/22/2006. PU BHA #1. TIH. TAGGED CMT @ 2135' KB. DRILLED CMT & FLOAT EQUIP. F/ 2135' KB TO 2233' KB. DRILLED F/ 2233' KB TO 2358' KB. F.I.T. TEST 9.9 # @ 1215 PSI. DEVIATION SURVEY @ 2288' KB 1 DEGREE. DRILLED F/ 2358' KB TO 2767' KB. SERVICE RIG. DRILLED F/ 2767' KB TO 2957' KB. BOP TEST & DRILL. DRILLED F/ 2957' KB TO 3080' KB. REPAIR #1 MUD PUMP. DRILLED F/ 3083' KB TO 3398' KB. DEVIATION SURVEY @ 3328' KB 2.5 DEGREES. DRILLED F/ 3398' KB TO 4279' KB.

REPORT DATE: 03/24/06 MD: 6,828 TVD: 6,828 DAYS: 3 MW: 8.6 VISC: 26
 DAILY : DC : \$68,748.00 CC : \$0.00 TC : \$68,748.00 CUM : DC : \$357,900.64 CC : \$0.00 TC : \$357,900.64
 DAILY DETAILS : BOP TEST & DRILL. DRILLED F/ 4279' KB TO 4405' KB. DEVIATION SURVEY @ 4335' KB 1 DEGREE. DRILLED F/ 4405' KB TO 5412' KB. SERVICE RIG. DEVIATION SURVEY 5342' KB 1.5 DEGREES. DRILLED F/ 5412' KB TO 5601' KB. BOP TEST & DRILL. DRILLED F/ 5601' KB TO 6389' KB. DEVIATION SURVEY @ 6319' KB 1.5 DEGREES. DRILLED F/ 6389' KB TO 6828' KB.

REPORT DATE: 03/25/06 MD: 8,340 TVD: 8,340 DAYS: 4 MW: 9 VISC: 41
 DAILY : DC : \$33,341.00 CC : \$0.00 TC : \$33,341.00 CUM : DC : \$391,241.64 CC : \$0.00 TC : \$391,241.64
 DAILY DETAILS : BOP FUNCTION TEST. BOP / FIRE DRILL. 60 SECS. DRILLING FROM 6828' TO 7427'. W/ 25K WOB & 45 RPMS. RIG SERVICE. WIRELINE SURVEY @ 7357' = 1" DRLG FROM 7427' TO 8194'. W/ 25K WOB & 45 RPMS. REPAIR WASH IN STAND PIPE. DRLG FROM 8194' TO 8340'. W/ 25K WOB & 45 RPMS.

REPORT DATE: 03/26/06 MD: 8,452 TVD: 8,452 DAYS: 5 MW: 9.2 VISC: 41
 DAILY : DC : \$71,544.00 CC : \$0.00 TC : \$71,544.00 CUM : DC : \$462,785.64 CC : \$0.00 TC : \$462,785.64
 DAILY DETAILS : BOP FUNCTION TEST. BOP / FIRE DRILL 85 SECS. DRILL FROM 8340' TO 8452' W/ 25K WOB & 45 RPMS. TD WELL @ 10:00 AM ON 3/25/06. CIRCULATE WELL BORE CLEAN. PUMP PILL. STAND BACK KELLY. TOH W/ DRILL STRING & BHA. RIG UP SCHLUMBERGER & RUN LOG'S. (TRUCK TROUBLE WITH EST. 3.5 HRS DOWN TIME TIH W/ DRILL STRING & TRICONE BHA.

REPORT DATE: 03/27/06 MD: 8,452 TVD: 8,452 DAYS: 6 MW: VISC:
 DAILY : DC : \$171,718.00 CC : \$0.00 TC : \$171,718.00 CUM : DC : \$634,503.64 CC : \$0.00 TC : \$634,503.64
 DAILY DETAILS : CIRCULATE WELL BORE CLEAR. PUMP PILL. STAND BACK KELLY. RIG UP LAY DOWN MACHINE & CREW. HOLD SAFETY MEETING. LAY DOWN DRILL STRING & BHA. RIG UP CSGN CREW. HOLD SAFETY MEETING. RUN 199 JT'S 5.5", 17#, M-80 CSGN. SET @ 8419'/KB. CIRCULATE WELL BORE CLEAR. RIG UP HALCO. HOLD SAFETY MEETING. CEMENT W/ 65 SKS LEAD MIXED @ 11.6 PPG & 3.23 YLD THEN 500 SKS TAIL MIXED @ 13.0 PPG & 1.175 YLD. DISPLACE W/ 194 BBLs 2% KCL. PLUG DOWN @ 9:45PM. GOOD RETURNS THU JOB. NIPPLE DOWN BOP'S. CLEAN PIT'S RIG DOWN. RELEASE RIG @ 2:00AM ON 3/27/06. PREPARE TO MOVE TO RBU 11-20F

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 4/6/2006 at 2:32:04 PM

Pages : 2 (including Cover)

Subject : RBU 2-19F

T105 R20E S-19 43-044-36434

RECEIVED

APR 06 2006

DIV. OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

WELL NAME : RBU 2-19F

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 684' FNL 1823' FEL SEC 19 T 10S R 20E

COUNTY & STATE : UINTAH

UT

CONTRACTOR :

WI % : 100.00 AFE # : 0601169

API # : 43-047-36434

PLAN DEPTH : 8,450

SPUD DATE : 03/14/06

DHC : \$566,000

CWC : \$630,500

AFE TOTAL : \$1,196,500

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$634,503.64

EVENT CC : \$15,860.00

EVENT TC : \$650,363.64

WELL TOTL COST : \$788,739

REPORT DATE: 03/27/06

MD : 8,452

TVD : 8,452

DAYS : 6

MW :

VISC :

DAILY : DC : \$171,718.00

CC : \$0.00

TC : \$171,718.00

CUM : DC : \$634,503.64

CC : \$0.00

TC : \$634,503.64

DAILY DETAILS : CIRCULATE WELL BORE CLEAR. PUMP PILL. STAND BACK KELLY. RIG UP LAY DOWN MACHINE & CREW. HOLD SAFTEY MEETING. LAY DOWN DRILL STRING & BHA. RIG UP CSGN CREW. HOLD SAFTEY MEETING. RUN 199 JT'S 5.5", 17#, M-80 CSGN. SET @ 8419'/KB. CIRCULATE WELL BORE CLEAR. RIG UP HALCO. HOLD SAFTEY MEETING. CEMENT W/ 65 SKS LEAD MIXED @ 11.6 PPG & 3.23 YLD THEN 500 SKS TAIL MIXED @ 13.0 PPG & 1.175 YLD. DISPLACE W/ 194 BBLS 2% KCL. PLUG DOWN @ 9:45PM. GOOD RETURNS THU JOB. NIPPLE DOWN BOP'S. CLEAN PIT'S RIG DOWN. RELEASE RIG @ 2:00AM ON 3/27/06. PREPARE TO MOVE TO RBU 11-20F

REPORT DATE: 04/06/06

MD : 8,452

TVD : 8,452

DAYS : 7

MW :

VISC :

DAILY : DC : \$0.00

CC : \$15,860.00

TC : \$15,860.00

CUM : DC : \$634,503.64

CC : \$15,860.00

TC : \$650,363.64

DAILY DETAILS : MIRU SCHLUMBER WIRE LINE AND ACTION HOT OIL SERVICE. RUN CMT BOND LOG UNDER 1500# PRESSURE FROM W.L. PBTD @ 8356' KB TO 2700' KB, FOUND CMT TOP @ 3000' KB. POOH W/ WIRE LINE, AND PRESSURE TESTED CSG TO 5000 PSI, HELD GOOD. RIH AND PERFORATED STAGE #1, SHUT WELL IN, RDMO WIRE LINE AND HOT OILIER. WAIT ON FRAC DATE.

RECEIVED

APR 06 2006

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPlicate - Other Instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
 Dominion Exploration & Production, Inc.

3a. Address Suite 600
 14000 Quail Springs Parkway, OKC, OK 73134

3b. Phone No. (include area code)
 (405) 749-5263

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
 684' FNL & 1823' FEL, Sec. 19-10S-20E

5. Lease Serial No.
 U-013769-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
 River Bend Unit

8. Well Name and No.
 RBU 2-19F

9. API Well No.
 43-047-36434

10. Field and Pool, or Exploratory Area
 Natural Buttes

11. County or Parish, State
 Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other
			Drilling Operations

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

3/27/06 ran 199 jts. 5 1/2", 17#, M-80, LT&C csg., set @ 8419'. Cemented lead w/65 sks Hi-Fill "V", 11.6 ppg, 3.23 yld., tailed w/500 sks HLC "V", 13.0 ppg, 1.75 yld., plug down. Cleaned pits, released rig. WOCU.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) **Carla Christian** Title **Sr. Regulatory Specialist**

Signature *Carla Christian* Date **4/06/2006**

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED
APR 10 2006

DIV. OF OIL, GAS & MINING

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 4/12/2006 at 4:19:48 PM

Pages : 2 (including Cover)

Subject : RBU 2-19F *T 109 R 20ES-19 43-047-36434*

RECEIVED
APR 12 2006
DIV. OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

WELL NAME : RBU 2-19F		Event No: 1	
DISTRICT : WESTERN	FIELD : NATURAL BUTTES 630	LOCATION : 684' FNL 1823' FEL SEC 19 T 10S R 20E	
COUNTY & STATE : UINTAH	UT	CONTRACTOR :	
WM % : 100.00	AFE # : 0601169	API # : 43-047-36434	PLAN DEPTH : 8,450 SPUD DATE : 03/14/06
DHC : \$566,000	CWC : \$630,500	AFE TOTAL : \$1,196,500	FORMATION : WASATCH/MESAVERDE
EVENT DC : \$634,503.64	EVENT CC : \$15,860.00	EVENT TC : \$650,363.64	WELL TOTL COST : \$788,739

REPORT DATE: 03/27/06	MD : 8,452	TVD : 8,452	DAYS : 6	MW :	VISC :
DAILY : DC : \$171,718.00	CC : \$0.00	TC : \$171,718.00	CUM : DC : \$634,503.64	CC : \$0.00	TC : \$634,503.64

DAILY DETAILS : CIRCULATE WELL BORE CLEAR. PUMP PILL. STAND BACK KELLY. RIG UP LAY DOWN MACHINE & CREW. HOLD SAFTEY MEETING. LAY DOWN DRILL STRING & BHA. RIG UP CSGN CREW. HOLD SAFTEY MEETING. RUN 199 JT'S 5.5", 17#, M-80 CSGN. SET @ 8419'/KB. CIRCULATE WELL BORE CLEAR. RIG UP HALCO. HOLD SAFTEY MEETING. CEMENT W/ 65 SKS LEAD MIXED @ 11.6 PPG & 3.23 YLD THEN 500 SKS TAIL MIXED @ 13.0 PPG & 1.175 YLD. DISPLACE W/ 194 BBLs 2% KCL. PLUG DOWN @ 9:45PM. GOOD RETURNS THU JOB. NIPPLE DOWN BOP'S. CLEAN PIT'S RIG DOWN. RELEASE RIG @ 2:00AM ON 3/27/06. PREPARE TO MOVE TO RBU 11-20F

REPORT DATE: 04/06/06	MD : 8,452	TVD : 8,452	DAYS : 7	MW :	VISC :
DAILY : DC : \$0.00	CC : \$15,860.00	TC : \$15,860.00	CUM : DC : \$634,503.64	CC : \$15,860.00	TC : \$650,363.64

DAILY DETAILS : MIRU SCHLUMBER WIRE LINE AND ACTION HOT OIL SERVICE. RUN CMT BOND LOG UNDER 1500# PRESSURE FROM W.L. PBTD @ 8356' KB TO 2700' KB, FOUND CMT TOP @ 3000' KB. POOH W/ WIRE LINE, AND PRESSURE TESTED CSG TO 5000 PSI, HELD GOOD. RIH AND PERFORATED STAGE #1, SHUT WELL IN, RDMO WIRE LINE AND HOT OILIER. WAIT ON FRAC DATE.

RECEIVED
APR 12 2006
DIV. OF OIL, GAS & MINING

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 4/19/2006 at 2:13:28 PM

Pages : 4 (including Cover)

Subject : RBU 2-19F *T105 R20E S-19 43-047-36434*

APR 19 2006



WELL CHRONOLOGY REPORT

WELL NAME : RBU 2-19F

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 684' FNL 1823' FEL SEC 19 T 10S R 20E

COUNTY & STATE : UINTAH

UT

CONTRACTOR :

WI % : 100.00 AFE # : 0601169

API # : 43-047-36434

PLAN DEPTH : 8,450 SPUD DATE : 03/14/06

DHC : \$566,000

CWC : \$630,500

AFE TOTAL : \$1,196,500

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$634,503.64

EVENT CC : \$268,735.00

EVENT TC : \$903,238.64

WELL TOTL COST : \$1,041,614

REPORT DATE: 04/16/06

MD : 8,452

TVD : 8,452

DAYS : 8

MW :

VISC :

DAILY : DC : \$0.00

CC : \$44,500.00

TC : \$44,500.00

CUM : DC : \$634,503.64

CC : \$60,360.00

TC : \$694,863.64

DAILY DETAILS : 04-15-06 RBU 2-19F. MIRU SCHLUMBERGER frac equipment, tested lines to 7000 psi. Held safety meeting with all personnel. Quality control on gel & breaker systems with on-site lab was verified. Frac'd Mesa Verde Interval # 1, 8246-56', 6 spf, 61 holes, with 26,006# 20/40 PR6000 sand. Pumped frac at an average rate of 22.9 bpm, using 153.4 mscf of N2 and 448 bbls of fluid. Average surface treating pressure was 4419 psi with sand concentrations stair stepping from 1.0 ppg to 4.0 ppg.

2795 gallons Pad YF120ST/N2 gel.

1763 gallons YF120ST/N2 pumped @ 1.0 ppg sand concentration.

1762 gallons YF120ST/N2 pumped @ 2.0 ppg sand concentration.

1759 gallons YF120ST/N2 pumped @ 3.0 ppg sand concentration.

2306 gallons YF120ST/N2 pumped @ 4.0 ppg sand concentration.

8045 gallons WF110 slick water flush.

Total frac fluid pumped 448 bbls. N2 was cut during flush. Ru wire line, (miss run) RIH and set 8K frac plug @ 8190'.

RIH and perforate interval #2 @ 8104-36', 2 spf, 65 holes. Fraced interval #2 w/ 50,591# 20/40 PR6000 sand. Pumped frac at an avg rate of 28 bpm, using 355.6 mscf of N2 and 648 bbls of fluid. Avg surface treating pressure was 4578 psi w/ sand concentrations stair stepping from 1.0 ppg to 4.0 ppg.

3491 gallons Pad YF120ST/N2 gel.

2816 gallons YF120ST/N2 pumped @ 1.0 ppg sand concentration.

2817 gallons YF120ST/N2 pumped @ 2.0 ppg sand concentration.

4212 gallons YF120ST/N2 pumped @ 3.0 ppg sand concentration.

4089 gallons YF120ST/N2 pumped @ 4.0 ppg sand concentration.

5818 gallons WF110 slick water flush.

Total frac fluid pumped 648 bbls. N2 was cut not during flush. Schlumberger wire line lost the hard drive in their computer, unable to continue fracing. Opened well to the pit on a 12/64 choke. Turned well over to production. Prep to finish monday.

APR 19 2006



WELL CHRONOLOGY REPORT

WELL NAME : RBU 2-19F

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 684' FNL 1823' FEL SEC 19 T 10S R 20E

COUNTY & STATE : UINTAH

UT

CONTRACTOR :

WI % : 100.00 AFE # : 0601169

API # : 43-047-36434

PLAN DEPTH : 8,450

SPUD DATE : 03/14/06

DHC : \$566,000

CWC : \$630,500

AFE TOTAL : \$1,196,500

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$634,503.64

EVENT CC : \$268,735.00

EVENT TC : \$903,238.64

WELL TOTL COST : \$1,041,614

REPORT DATE : 04/17/06

MD : 8,452

TVD : 8,452

DAYS : 9

MW :

VISC :

DAILY : DC : \$0.00

CC : \$208,375.00

TC : \$208,375.00

CUM : DC : \$634,503.64

CC : \$268,735.00

TC : \$903,238.64

DAILY DETAILS : FCP 1050#. RIH and set 5k frac plug @ 7800', perforate interval # 3 @ 7648-57', 6 spf, 55 holes. (Spear headed 3 bbls of acid ahead of frac) Fraced interval #3 w/ 30,615# 20/40 Ottawa sand. Pumped frac at an avg rate of 22.9 bpm, using 142.8 mscf of N2 and 532 bbls of fluid. Avg surface treating pressure was 4075 psi w/ sand concentrations stair stepping from 2.0 ppg to 5.0 ppg.

2795 gallons Pad YF115LG/N2 gel.
 2123 gallons YF115LG/N2 pumped @ 2.0 ppg sand concentration.
 2111 gallons YF115LG/N2 pumped @ 3.0 ppg sand concentration.
 2595 gallons YF115LG/N2 pumped @ 5.0 ppg sand concentration.
 7338 gallons WF110 slick water flush.

Total frac fluid pumped 532 bbls. N2 was cut during flush. RIH and set 5k frac plug @ 7240', perforate interval # 4 @ 6902-05', 1 spf, 7016-29', 4 spf, 57 holes. Fraced interval #4 w/ 30,069# 20/40 Ottawa sand. Pumped frac at an avg rate of 26.4 bpm, using 127.4 mscf of N2 and 427 bbls of fluid. Avg surface treating pressure was 3537 psi w/ sand concentrations stair stepping from 2.0 ppg to 5.0 ppg.

2793 gallons Pad YF115LG/N2 gel.
 2130 gallons pumped YF115LG/N2 @ 2.0 ppg sand concentration.
 2110 gallons pumped YF115LG/N2 @ 3.0 ppg sand concentration.
 2480 gallons pumped YF115LG/N2 @ 5.0 ppg sand concentration.
 6679 gallons WF110 slick water flush.

Total frac fluid pumped 427 bbls. N2 was cut during flush. RIH and set 5k frac plug @ 6730', perforate interval # 5 @ 6482-91', 6 spf, 55 holes. Fraced interval #5 w/ 25,916# 20/40 Ottawa sand. Pumped frac at an avg rate of 19.5 bpm, using 111.2 mscf of N2 and 400 bbls of fluid. Avg surface treating pressure was 2948 psi w/ sand concentrations stair stepping from 2.0 ppg to 5.0 ppg.

2798 gallons Pad YF115LG/N2 gel.
 1911 gallons YF115LG/N2 pumped @ 2.0 ppg sand concentration.
 1760 gallons YF115LG/N2 pumped @ 3.0 ppg sand concentration.
 2249 gallons YF115LG/N2 pumped @ 5.0 ppg sand concentration.

6271 gallons WF110 slick water flush.

Total frac fluid pumped 400 bbls. N2 was cut during flush. RIH and set 5k frac plug @ 6310', perforate interval # 6 @ 6092-6102', 6 spf, 61 holes. Fraced interval #6 w/ 29,818# 20/40 Ottawa sand. Pumped frac at an avg rate of 19.1 bpm, using 116.6 mscf of N2 and 414 bbls of fluid. Avg surface treating pressure was 2467 psi w/ sand concentrations stair stepping from 2.0 ppg to 5.0 ppg.

2798 gallons Pad YF115LG/N2 gel.
 2117 gallons pumped YF115LG/N2 @ 2.0 ppg sand concentration.
 2109 gallons pumped YF115LG/N2 @ 3.0 ppg sand concentration.
 2461 gallons pumped YF115LG/N2 @ 5.0 ppg sand concentration.

5823 gallons WF110 slick water flush.

Total frac fluid pumped 414 bbls. N2 was cut during flush. Ru wire line, RIH and set 5K frac plug @ 5750'. RIH and perforate interval #7 @ 5382-94', 5396-5401', 5550-54', 3 spf, 66 holes. Fraced interval #7 w/ 36,434# 20/40 Ottawa sand. Pumped frac at an avg rate of 24.8 bpm, using 166.9 mscf of N2 and 416 bbls of fluid. Avg surface treating pressure was 2707 psi w/ sand concentrations stair stepping from 2.0 ppg to 6.0 ppg.

3494 gallons Pad YF120ST/N2 gel.
 2130 gallons YF120ST/N2 pumped @ 2.0 ppg sand concentration.
 2111 gallons YF120ST/N2 pumped @ 3.0 ppg sand concentration.
 2107 gallons YF120ST/N2 pumped @ 4.0 ppg sand concentration.
 2177 gallons YF120ST/N2 pumped @ 6.0 ppg sand concentration.
 3209 gallons WF110 slick water flush.

Total frac fluid pumped 416 bbls. N2 was not cut during flush. Opened well to the pit on a 12/64 choke. Turned well over to production.

APR 19 2006



WELL CHRONOLOGY REPORT

WELL NAME : RBU 2-19F

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 684' FNL 1823' FEL SEC 19 T 10S R 20E

COUNTY & STATE : UINTAH

UT

CONTRACTOR :

WM % : 100.00 AFE # : 0601169

API # : 43-047-36434

PLAN DEPTH : 8,450 SPUD DATE : 03/14/06

DHC : \$566,000

CWC : \$630,500

AFE TOTAL : \$1,196,500

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$634,503.64

EVENT CC : \$268,735.00

EVENT TC : \$903,238.64

WELL TOTL COST : \$1,041,614

REPORT DATE: 04/18/06

MD : 8,452

TVD : 8,452

DAYS : 10

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$634,503.64

CC : \$268,735.00

TC : \$903,238.64

DAILY DETAILS : WELL FRACT 4-17-06 W/ 3261 BBLS , ISIP 2550, TURNED TO PIT ON 12/64" CHOKE @ 2 PM
 4-18-06, 1000 FCP, RECOVERED 830 BBLS FLUID, CHANGED CHOKE TO 18/64 CHOKE @ 8:00 AM

APR 19 2006

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 4/26/2006 at 1:50:48 PM

Pages : 2 (including Cover)

Subject : RBU 2-19F *T10S R20E S-19 43-04A-36434*

RECEIVED

APR 26 2006

DIV. OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

WELL NAME : RBU 2-19F

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 684' FNL 1823' FEL SEC 19 T 10S R 20E

COUNTY & STATE : UINTAH

UT

CONTRACTOR :

WI % : 100.00 AFE # : 0601169

API # : 43-047-36434

PLAN DEPTH : 8,450 SPUD DATE : 03/14/06

DHC : \$566,000

CWC : \$630,500

AFE TOTAL : \$1,196,500

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$634,503.64

EVENT CC : \$268,735.00

EVENT TC : \$903,238.64

WELL TOTL COST : \$1,041,614

REPORT DATE: 04/19/06 MD : 8,452 TVD : 8,452 DAYS : 11 MW : VISC :
 DAILY : DC : \$0.00 CC : \$0.00 TC : \$0.00 CUM : DC : \$634,503.64 CC : \$268,735.00 TC : \$903,238.64
 DAILY DETAILS : WELL FLOWING UP CSG TO SALES, FCP 1000, RECOVERED 830 BBLS WTR, CHANGED TO 18/64" CHOKE @ 8:00 AM, TURNED BACK TO PIT

REPORT DATE: 04/20/06 MD : 8,452 TVD : 8,452 DAYS : 12 MW : VISC :
 DAILY : DC : \$0.00 CC : \$0.00 TC : \$0.00 CUM : DC : \$634,503.64 CC : \$268,735.00 TC : \$903,238.64
 DAILY DETAILS : WELL FLOWING UP CSG TO SALES, MADE 475 MCF, FCP 1482, SLP 183, 35 BBLS FLUID, 13/64" CHOKE, 13 HRS FLOWTIME

REPORT DATE: 04/21/06 MD : 8,452 TVD : 8,452 DAYS : 13 MW : VISC :
 DAILY : DC : \$0.00 CC : \$0.00 TC : \$0.00 CUM : DC : \$634,503.64 CC : \$268,735.00 TC : \$903,238.64
 DAILY DETAILS : WELL FLOWING UP CSG TO SALESLINE MADE 1213MCF, FCP 1451, SLP 106, 0 BBLS OIL, 40 BBLS WTR, 14/64 CHOKE

REPORT DATE: 04/22/06 MD : 8,452 TVD : 8,452 DAYS : 14 MW : VISC :
 DAILY : DC : \$0.00 CC : \$0.00 TC : \$0.00 CUM : DC : \$634,503.64 CC : \$268,735.00 TC : \$903,238.64
 DAILY DETAILS : WELL FLOWING UP CSG TO SALES MADE 1201 MCF, FCP 1432, SLP 105, 5 BBLS OIL, 33 BBLS WTR, 14/64 CHOKE

RECEIVED
 APR 26 2006
 DIV. OF OIL, GAS & MINING

FACSIMILE COVER PAGE

To : Utah Division of Oil, Gas & Mining

From : g

Sent : 5/3/2006 at 5:11:36 PM

Pages : 2 (including Cover)

Subject : RBU 2-19F *T105 R20E S-19 43-047-36434*

RECEIVED
MAY 03 2006
DIV. OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

WELL NAME : RBU 2-19F

DISTRICT : WESTERN

FIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 684' FNL 1823' FEL SEC 19 T 10S R 20E

COUNTY & STATE : UINTAH

UT

CONTRACTOR :

WI % : 100.00 AFE # : 0601169

API # : 43-047-36434

PLAN DEPTH : 8,450 SPUD DATE : 03/14/06

DHC : \$566,000

CWC : \$630,500

AFE TOTAL : \$1,196,500

FORMATION : WASATCH/MESAVERDE

EVENT DC : \$634,503.64

EVENT CC : \$268,735.00

EVENT TC : \$903,238.64

WELL TOTL COST : \$1,041,614

REPORT DATE: 04/21/06

MD : 8,452

TVD : 8,452

DAYS : 13

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$634,503.64

CC : \$268,735.00

TC : \$903,238.64

DAILY DETAILS : WELL FLOWING UP CSG TO SALESLINE MADE 1213MCF, FCP 1451, SLP 106, 0 BBLS OIL, 40 BBLS WTR, 14/64
CHOKE

REPORT DATE: 04/22/06

MD : 8,452

TVD : 8,452

DAYS : 14

MW :

VISC :

DAILY : DC : \$0.00

CC : \$0.00

TC : \$0.00

CUM : DC : \$634,503.64

CC : \$268,735.00

TC : \$903,238.64

DAILY DETAILS : WELL FLOWING UP CSG TO SALES MADE 1201 MCF, FCP 1432, SLP 105, 5 BBLS OIL, 33 BBLS WTR, 14/64
CHOKE

RECEIVED

MAY 03 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
WELL COMPLETION OR RECOMPLETION REPORT AND LOG

CONFIDENTIAL

FORM APPROVED
OMB NO. 1004-0137
Expires: November 30, 2000
5. Lease Serial No.
U-013769-A

1a. Type of Well Oil Well Gas Well Dry Other _____
 b. Type of Completion: New Well Work Over Deepen Diff. Resvr.
 Other _____

2. Name of Operator
Dominion Exploration & Production, Inc.

3. Address
14000 Quail Springs Parkway - Ste. 600 - Okla. City, OK 73134

3a. Phone No. (include area code)
405-749-1300

6. If Indian, Allottee or Tribe Name

 7. Unit or CA Agreement Name and No.
River Bend Unit
 8. Lease Name and Well No.
RBU 2-19F
 9. API Well No.
43-047-36434

4. Location of Well (Report location clearly and in accordance with Federal requirements)*
 At surface **684' FNL & 1823' FEL, SW NE**
 At top prod. Interval reported below _____
 At total depth _____

10. Field and Pool, or Exploratory
Natural Buttes
 11. Sec., T., R., M., or Block and Survey or Area
19-10S-20E
 12. County or Parish
Uintah
 13. State
UT

14. Date Spudded
3/12/2006

15. Date T.D. Reached
3/25/2006

16. Date Completed D&A Ready to prod.
4/19/2006

17. Elevations (DF, RKB, RT, GL)*
5177' GL

18. Total Depth: MD **8452'** TVD _____
 19. Plug Back T.D.: MD **8356'** TVD _____
 20. Depth Bridge Plug Set: MD _____ TVD _____

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
**Platform Express Triple Combo Gamma Ray
& Cement Bond Log**

22. Was well cored? No Yes (Submit analysis)
 Was DST run? No Yes (Submit report)
 Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all string set in well)

Hole Size	Size/Grade	Wt. (#/ft)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12 1/4"	8 5/8"	32#	Surface	2,214'		700 Sx		Circ.	
7 7/8"	5 1/2"	17#	Surface	8,419'		565 Sx		Est. TOC @ 3000'	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Mesaverde	8246'	8256'	8246- 56		61	Open
B) Mesaverde	8104'	8136'	8104- 36		65	Open
C) Mesaverde	7648'	7657'	7648- 57		55	Open
D) Wasatch	6902'	7029'	6902- 05, 7016- 29		57	Open
E) Wasatch	6482'	6491'	6482- 91		55	Open
F) Wasatch	6092'	6102'	6092- 02		61	Open
G) Wasatch	5382'	5554'	5382- 94, 5396- 01, 5550- 54		66	Open

26. Perforation Record

Depth Interval	Amount and Type of Material
8246' - 8256'	Frac w/26,006# 20/40 PR6000 sd. w/153.4 mscf of N2 and 448 bbls of YF120ST.
8104' - 8136'	Frac w/50,591# 20/40 PR6000 sd. w/355.6 mscf of N2 and 648 bbls of YF120ST.
7648' - 7657'	Frac w/30,615# 20/40 Ottawa sd. w/142.8 mscf of N2 and 532 bbls of YF115LG.
6902' - 7029'	Frac w/30,069# 20/40 Ottawa sd. w/127.4 mscf of N2 and 427 bbls of YF115LG.
6482' - 6491'	Frac w/25,916# 20/40 Ottawa sd. w/111.2 mscf of N2 and 400 bbls of YF115LG.
6092' - 6102'	Frac w/29,818# 20/40 Ottawa sd. w/116.6 mscf of N2 and 414 bbls of YF115LG.
5382' - 5554'	Frac w/36,434# 20/40 Ottawa sd. w/166.9 mscf of N2 and 416 bbls of YF120ST.

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
4/19/2006	6/12/2006	24	→	0	1724	3			Flowing
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
18		348	→	0	1724	3		Producing	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						

(See instructions and spaces for additional data on reverse side)

28b Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

Sold

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers


Formation	Top	Bottom	Description, Contents, etc.	Name	Top
					Meas. Depth
				Wasatch Tongue	4163'
				Uteland Limestone	4520'
				Wasatach	4654'
				Chapita Wells	5488'
				Uteland Buttes	6675'
				Mesaverde	7662'

32. Additional remarks (include plugging procedure)

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 6. Core Analysis
- 7. Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Carla Christian Title Sr. Regulatory Specialist
 Signature  Date July 7, 2006

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING
1. DJJ
2. CDW

X - Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

7/1/2007

FROM: (Old Operator): N1095-Dominion Exploration & Production, Inc 14000 Quail Springs Parkway, Suite 600 Oklahoma City, OK 73134 Phone: 1 (405) 749-1300	TO: (New Operator): N2615-XTO Energy Inc 810 Houston St Fort Worth, TX 76102 Phone: 1 (817) 870-2800
--	--

WELL NAME	CA No.	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LIST									

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 8/6/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 8/6/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 8/6/2007
- a. Is the new operator registered in the State of Utah: Business Number: 5655506-0143
- b. If **NO**, the operator was contacted on: _____
- a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- b. Inspections of LA PA state/fee well sites complete on: n/a
- c. Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: _____
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: _____
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 9/27/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 9/27/2007
- Bond information entered in RBDMS on: 9/27/2007
- Fee/State wells attached to bond in RBDMS on: 9/27/2007
- Injection Projects to new operator in RBDMS on: 9/27/2007
- Receipt of Acceptance of Drilling Procedures for APD/New on: 9/27/2007

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: UTB000138
 - Indian well(s) covered by Bond Number: n/a
 - a. (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 104312762
 - b. The **FORMER** operator has requested a release of liability from their bond on: 1/23/2008
- The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

		5. LEASE DESIGNATION AND SERIAL NUMBER:
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		8. WELL NAME and NUMBER: SEE ATTACHED
2. NAME OF OPERATOR: XTO Energy Inc. <i>N2615</i>		9. API NUMBER: SEE ATTACHED
3. ADDRESS OF OPERATOR: 810 Houston Street CITY Fort Worth STATE TX ZIP 76102		10. FIELD AND POOL, OR WILDCAT: Natural Buttes
PHONE NUMBER: (817) 870-2800		
4. LOCATION OF WELL FOOTAGES AT SURFACE: SEE ATTACHED		COUNTY: Uintah
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective July 1, 2007, XTO Energy Inc. has purchased the wells listed on the attachment from:

Dominion Exploration & Production, Inc. *N1095*
14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134

James D Abercrombie (405) 749-1300
James D. Abercrombie
Sr. Vice President, General Manager - Western Business Unit

Please be advised that XTO Energy Inc. is considered to be the operator on the attached list and is responsible under the terms and conditions of the lease for the operations conducted upon the lease lands. Bond coverage is provided by Nationwide BLM Bond #104312750 and Department of Natural Resources Bond #104312762.

NAME (PLEASE PRINT) <u>Edwin S. Ryan, Jr.</u>	TITLE <u>Sr. Vice President - Land Administration</u>
SIGNATURE <i>Edwin S. Ryan, Jr.</i>	DATE <u>7/31/2007</u>

(This space for State use only)

APPROVED 9127107

Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

(5/2000) (See Instructions on Reverse Side)

RECEIVED
AUG 06 2007
DIV. OF OIL, GAS & MINING

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well name	qtr	qtr	sec	twp	rng	lease num	entity	Lease	well	stat
4304730087	OSCU 2	NWSE	03	100S	200E	U-037164	7050	Federal	GW	P	
4304730266	RBU 11-18F	NESW	18	100S	200E	U-013793	7050	Federal	GW	P	
4304730374	RBU 11-13E	NESW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304730375	RBU 11-15F	NESW	15	100S	200E	U-7206	7050	Federal	GW	P	
4304730376	RBU 7-21F	SWNE	21	100S	200E	U-013793-A	7050	Federal	GW	P	
4304730405	RBU 11-19F	NESW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304730408	RBU 11-10E	NESW	10	100S	190E	U-013792	7050	Federal	GW	P	
4304730410	RBU 11-14E	NESW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304730411	RBU 11-23E	NESW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304730412	RBU 11-16F	NESW	16	100S	200E	U-7206	7050	Federal	GW	P	
4304730585	RBU 7-11F	SWNE	11	100S	200E	U-01790	7050	Federal	GW	P	
4304730689	RBU 11-3F	NESW	03	100S	200E	U-013767	7050	Federal	GW	P	
4304730720	RBU 7-3E	SWNE	03	100S	190E	U-013765	7050	Federal	GW	P	
4304730759	RBU 11-24E	NESW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304730761	RBU 7-10F	SWNE	10	100S	200E	U-7206	7050	Federal	GW	P	
4304730762	RBU 6-20F	SENE	20	100S	200E	U-013793-A	7050	Federal	GW	P	
4304730768	RBU 7-22F	SWNE	22	100S	200E	14-20-H62-2646	7050	Indian	GW	P	
4304730887	RBU 16-3F	SESE	03	100S	200E	U-037164	7050	Federal	GW	P	
4304730915	RBU 1-15E	NENE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304730926	RBU 1-14E	NENE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304730927	RBU 1-22E	NENE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304730970	RBU 1-23E	NENE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304730971	RBU 4-19F	NWNW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304730973	RBU 13-11F	SWSW	11	100S	200E	U-7206	7050	Federal	WD	A	
4304731046	RBU 1-10E	NWNE	10	100S	190E	U-013792	7050	Federal	GW	S	
4304731115	RBU 16-16F	SESE	16	100S	200E	U-7206	7050	Federal	GW	P	
4304731140	RBU 12-18F	NWSW	18	100S	200E	U-013793	7050	Federal	GW	P	
4304731141	RBU 3-24E	NENW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304731143	RBU 3-23E	NENW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304731144	RBU 9-23E	NESE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304731145	RBU 9-14E	NESE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304731160	RBU 3-15E	NENW	15	100S	190E	U-013766	7050	Federal	GW	P	
4304731161	RBU 10-15E	NWSE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304731176	RBU 9-10E	NESE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304731196	RBU 3-14E	SENE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304731252	RBU 8-4E	SENE	04	100S	190E	U-013792	7050	Federal	GW	P	
4304731322	RBU 1-19F	NENE	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304731323	RBU 5-10E	SWNW	10	100S	190E	U-013792	7050	Federal	GW	P	
4304731369	RBU 3-13E	NENW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304731518	RBU 16-3E	SESE	03	100S	190E	U-035316	7050	Federal	GW	P	
4304731519	RBU 11-11F	NESW	11	100S	200E	U-7206	7050	Federal	GW	P	
4304731520	RBU 1-17F	NENE	17	100S	200E	U-013769-B	7050	Federal	GW	P	
4304731605	RBU 9-13E	NESE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304731606	RBU 3-22E	NENW	22	100S	190E	U-013792	7050	Federal	GW	P	
4304731607	RBU 8-24E	SENE	24	100S	190E	U-013794	7050	Federal	GW	P	
4304731608	RBU 15-18F	SWSE	18	100S	200E	U-013794	7050	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well name	qtr	qtr	sec	twp	rng	lease num	entity	Lease	well	stat
4304731613	RBU 5-11F	SWNW	11	100S	200E	U-7206	7050	Federal	GW	P	
4304731615	RBU 4-22F	NWNW	22	100S	200E	U-0143521-A	7050	Federal	GW	S	
4304731652	RBU 6-17E	SWNW	17	100S	190E	U-03535	7050	Federal	GW	P	
4304731715	RBU 5-13E	SWNW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304731717	RBU 13-13E	SWSW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304731739	RBU 9-9E	NESE	09	100S	190E	U-03505	7050	Federal	GW	P	
4304732033	RBU 13-14E	SWSW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304732037	RBU 11-3E	NESW	03	100S	190E	U-013765	7050	Federal	GW	P	
4304732038	RBU 6-18F	SENE	18	100S	200E	U-013769	7050	Federal	GW	P	
4304732040	RBU 15-24E	SWSE	24	100S	190E	U-013794	7050	Federal	GW	P	
4304732041	RBU 5-14E	SWNW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304732050	RBU 12-20F	NWSW	20	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732051	RBU 7-13E	SWNE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304732070	RBU 16-19F	SESE	19	100S	200E	U-013769-A	7050	Federal	WD	A	
4304732071	RBU 9-22E	NESE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732072	RBU 15-34B	SWSE	34	090S	190E	U-01773	7050	Federal	GW	P	
4304732073	RBU 11-15E	NESW	15	100S	190E	U-013766	7050	Federal	GW	P	
4304732074	RBU 13-21F	SWSW	21	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732075	RBU 10-22F	NWSE	22	100S	200E	U-01470-A	7050	Federal	GW	P	
4304732081	RBU 9-20F	NESE	20	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732082	RBU 15-23E	SWSE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304732083	RBU 13-24E	SWSW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304732095	RBU 3-21E	NENW	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732103	RBU 15-17F	SWSE	17	100S	200E	U-013769-C	7050	Federal	GW	P	
4304732105	RBU 13-19F	SWSW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304732107	RBU 1-21E	NENE	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732128	RBU 9-21E	NESE	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732129	RBU 9-17E	NESE	17	100S	190E	U-03505	7050	Federal	GW	P	
4304732133	RBU 13-14F	SWSW	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732134	RBU 9-11F	NESE	11	100S	200E	U-7206	7050	Federal	GW	P	
4304732138	RBU 5-21F	SWNW	21	100S	200E	U-013793	7050	Federal	GW	P	
4304732146	RBU 1-20E	NENE	20	100S	190E	U-03505	7050	Federal	GW	P	
4304732149	RBU 8-18F	SENE	18	100S	200E	U-013769	7050	Federal	GW	P	
4304732153	RBU 13-23E	SWSW	23	100S	190E	U-13766	7050	Federal	GW	P	
4304732154	RBU 5-24E	SWNW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304732156	RBU 5-14F	SWNW	14	100S	200E	U-013793A	7050	Federal	GW	P	
4304732166	RBU 7-15E	SWNE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304732167	RBU 15-13E	SWSE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304732189	RBU 13-10F	SWSW	10	100S	200E	14-20-H62-2645	7050	Indian	GW	P	
4304732190	RBU 15-10E	SWSE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304732191	RBU 3-17FX	NENW	17	100S	200E	U-013769-C	7050	Federal	GW	P	
4304732197	RBU 13-15E	SWSW	15	100S	190E	U-013766	7050	Federal	GW	P	
4304732198	RBU 7-22E	SWNE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732199	RBU 5-23E	SWNW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304732201	RBU 13-18F	SWSW	18	100S	200E	U-013793	7050	Federal	GW	S	
4304732211	RBU 15-15E	SWSE	15	100S	190E	U-013766	7050	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well_name	qtr	qtr	sec	twp	rng	lease_num	entity	Lease	well	stat
4304732213	RBU 5-19F	SWNW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304732217	RBU 9-17F	NESE	17	100S	200E	U-013769-C	7050	Federal	GW	P	
4304732219	RBU 15-14E	SWSE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304732220	RBU 5-3E	SWNW	03	100S	190E	U-03505	7050	Federal	GW	P	
4304732228	RBU 9-3E	NESE	03	100S	190E	U-035316	7050	Federal	GW	P	
4304732239	RBU 7-14E	SWNE	14	100S	190E	U-103792	7050	Federal	GW	P	
4304732240	RBU 9-14F	NESE	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732242	RBU 5-22E	SWNW	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732263	RBU 8-13E	SENE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304732266	RBU 9-21F	NESE	21	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732267	RBU 5-10F	SWNW	10	100S	200E	U-7206	7050	Federal	GW	P	
4304732268	RBU 9-10F	NESE	10	100S	200E	U-7206	7050	Federal	GW	P	
4304732269	RBU 4-15F	NWNW	15	100S	200E	INDIAN	7050	Indian	GW	PA	
4304732270	RBU 14-22F	SESW	22	100S	200E	U-0143519	7050	Federal	GW	P	
4304732276	RBU 5-21E	SWNW	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732289	RBU 7-10E	SWNE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304732290	RBU 5-17F	SWNW	17	100S	200E	U-013769-C	7050	Federal	GW	P	
4304732293	RBU 3-3E	NENW	03	100S	190E	U-013765	7050	Federal	GW	P	
4304732295	RBU 13-22E	SWSW	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732301	RBU 7-21E	SWNE	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732309	RBU 15-21F	SWSE	21	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732310	RBU 15-20F	SWSE	20	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732312	RBU 9-24E	NESE	24	100S	190E	U-013794	7050	Federal	GW	P	
4304732313	RBU 3-20F	NENW	20	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732315	RBU 11-21F	NESW	21	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732317	RBU 15-22E	SWSE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732328	RBU 3-19FX	NENW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304732331	RBU 2-11F	NWNE	11	100S	200E	U-01790	7050	Federal	GW	P	
4304732347	RBU 3-11F	NENW	11	100S	200E	U-7206	7050	Federal	GW	P	
4304732391	RBU 2-23F	NWNE	23	100S	200E	U-013793-A	7050	Federal	GW	S	
4304732392	RBU 11-14F	NESW	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732396	RBU 3-21F	NENW	21	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732407	RBU 15-14F	SWSE	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732408	RBU 4-23F	NWNW	23	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732415	RBU 3-10EX (RIG SKID)	NENW	10	100S	190E	UTU-035316	7050	Federal	GW	P	
4304732483	RBU 5-24EO	SWNW	24	100S	190E	U-013794	11719	Federal	OW	S	
4304732512	RBU 8-11F	SENE	11	100S	200E	U-01790	7050	Federal	GW	P	
4304732844	RBU 15-15F	SWSE	15	100S	200E	14-20-H62-2646	7050	Indian	GW	P	
4304732899	RBU 3-14F	NENW	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732900	RBU 8-23F	SENE	23	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732901	RBU 12-23F	NWSW	23	100S	200E	U-01470-A	7050	Federal	GW	P	
4304732902	RBU 1-15F	NENE	15	100S	200E	U-7260	7050	Federal	GW	S	
4304732903	RBU 3-15F	NENW	15	100S	200E	U-7260	7050	Federal	GW	P	
4304732904	RBU 9-15F	NESE	15	100S	200E	U-7260	7050	Federal	GW	P	
4304732934	RBU 3-10F	NENW	10	100S	200E	U-7206	7050	Federal	GW	P	
4304732969	RBU 11-10F	NESW	10	100S	200E	U-7206	7050	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well name	qtr	qtr	sec	twp	rng	lease num	entity	Lease	well	stat
4304732970	RBU 12-15F	NWSW	15	100S	200E	U-7206	7050	Federal	GW	P	
4304732971	RBU 15-16F	SWSE	16	100S	200E	U-7206	7050	Federal	GW	S	
4304732972	RBU 1-21F	NENE	21	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732989	RBU 13-10E	SWSW	10	100S	190E	U-013792	7050	Federal	GW	P	
4304732990	RBU 13-18F2	SWSW	18	100S	200E	U-013793	7050	Federal	GW	P	
4304732991	RBU 6-19F	SENW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304733033	RBU 7-23E	NWNE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304733034	RBU 9-18F	NESE	18	100S	200E	U-013794	7050	Federal	GW	P	
4304733035	RBU 14-19F	SESW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304733087	RBU 6-23F	SENW	23	100S	200E	U-013793-A	7050	Federal	GW	P	
4304733088	RBU 1-10F	NENE	10	100S	200E	U-7206	7050	Federal	GW	P	
4304733089	RBU 8-22F	SENE	22	100S	200E	U-0143521	7050	Federal	GW	P	
4304733090	RBU 11-22F	NESW	22	100S	200E	U-0143519	7050	Federal	GW	P	
4304733091	RBU 16-22F	SESE	22	100S	200E	U-01470-A	7050	Federal	GW	P	
4304733156	RBU 4-14E	NWNW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304733157	RBU 7-19F	SWNE	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304733158	RBU 7-20F	SWNE	20	100S	200E	U-013793-A	7050	Federal	GW	P	
4304733159	RBU 7-24E	SWNE	24	100S	190E	U-013794	7050	Federal	GW	P	
4304733160	RBU 8-15E	SENE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304733161	RBU 16-10E	SESE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304733194	RBU 2-14E	NWNE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304733272	RBU 13-3F	SWSW	03	100S	200E	U-013767	7050	Federal	GW	P	
4304733361	RBU 5-3F	SWNW	03	100S	200E	U-013767	7050	Federal	GW	P	
4304733362	RBU 15-10F	SWSE	10	100S	200E	U-7206	7050	Federal	GW	P	
4304733363	RBU 5-16F	SWNW	16	100S	200E	U-7206	7050	Federal	GW	P	
4304733365	RBU 12-14E	NWSW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304733366	RBU 5-18F	SWNW	18	100S	200E	U-013769	7050	Federal	GW	P	
4304733367	RBU 10-23F	NWSE	23	100S	200E	U-01470-A	7050	Federal	GW	P	
4304733368	RBU 14-23F	SESW	23	100S	200E	U-01470-A	7050	Federal	GW	S	
4304733424	RBU 5-20F	SWNW	20	100S	200E	U-013793-A	7050	Federal	GW	P	
4304733643	RBU 2-13E	NWNE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304733644	RBU 4-13E	NWNW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304733714	RBU 4-23E	NWNW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304733715	RBU 6-13E	SENW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304733716	RBU 10-14E	NWSE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304733838	RBU 8-10E	SENE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304733839	RBU 12-23E	NWSW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304733840	RBU 12-24E	NWSW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304733841	RBU 14-23E	SESW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304734302	RBU 1-23F	NENE	23	100S	200E	UTU-013793-A	7050	Federal	GW	P	
4304734661	RBU 16-15E	SESE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304734662	RBU 10-14F	NWSE	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304734663	RBU 6-14E	SENW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304734670	RBU 8-23E	NENE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304734671	RBU 4-24E	NENE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304734701	RBU 12-11F	SENW	11	100S	200E	U-7206	7050	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well_name	qtr	qtr	sec	twp	rng	lease_num	entity	Lease	well	stat
4304734702	RBU 2-15E	NWNE		15	100S	190E	U-013766	7050	Federal	GW	P
4304734703	RBU 4-17F	NWNW		17	100S	200E	U-013769-C	7050	Federal	GW	P
4304734745	RBU 10-20F	NESE		20	100S	200E	U-0143520-A	7050	Federal	GW	P
4304734749	RBU 7-18F	SWNE		18	100S	200E	U-013769	7050	Federal	GW	P
4304734750	RBU 12-10F	SWSW		10	100S	200E	14-20-H62-2645	7050	Indian	GW	P
4304734810	RBU 10-13E	NWSE		13	100S	190E	U-013765	7050	Federal	GW	P
4304734812	RBU 1-24E	NENE		24	100S	190E	U-013794	7050	Federal	GW	P
4304734826	RBU 12-21F	NESE		20	100S	200E	U-0143520-A	7050	Federal	GW	P
4304734828	RBU 4-15E	NWNW		15	100S	190E	U-013766	7050	Federal	GW	P
4304734844	RBU 14-14E	SESW		14	100S	190E	U-013792	7050	Federal	GW	P
4304734845	RBU 10-24E	NWSE		24	100S	190E	U-013794	7050	Federal	GW	P
4304734888	RBU 4-21E	NWNW		21	100S	190E	U-013766	7050	Federal	GW	P
4304734889	RBU 16-24E	SESE		24	100S	190E	U-13794	7050	Federal	GW	P
4304734890	RBU 12-18F2	NWSW		18	100S	200E	U-013793	7050	Federal	GW	P
4304734891	RBU 10-23E	NESW		23	100S	190E	U-013766	7050	Federal	GW	P
4304734892	RBU 8-22E	SENE		22	100S	190E	U-013792	7050	Federal	GW	P
4304734906	RBU 6-22E	SENW		22	100S	190E	U-013792	7050	Federal	GW	P
4304734907	RBU 2-24E	NWNE		24	100S	190E	U-013794	7050	Federal	GW	P
4304734910	RBU 4-16F	NWNW		16	100S	200E	U-7206	7050	Federal	GW	P
4304734911	RBU 12-19F	NWSW		19	100S	200E	U-013769-A	7050	Federal	GW	P
4304734912	RBU 14-20F	SESW		20	100S	200E	U-0143520-A	7050	Federal	GW	P
4304734942	RBU 1-22F	NWNW		23	100S	200E	U-013793-A	7050	Federal	GW	P
4304734945	RBU 8-19F	SENE		19	100S	200E	U-013769-A	7050	Federal	GW	P
4304734946	RBU 8-20F	SENE		20	100S	200E	U-013793-A	7050	Federal	GW	P
4304734962	RBU 12-17F	NWSW		17	100S	200E	U-013769-C	7050	Federal	GW	P
4304734963	RBU 2-17F	NWNE		17	100S	200E	U-013769-C	14117	Federal	GW	P
4304734966	RBU 14-18F	SESW		18	100S	200E	U-013793	7050	Federal	GW	P
4304734967	RBU 10-18F	NWSE		18	100S	200E	U-013794	7050	Federal	GW	P
4304734968	RBU 10-19F	NWSE		19	100S	200E	U-013769-A	7050	Federal	GW	P
4304734969	RBU 10-3E	NWSE		03	100S	190E	U-035316	7050	Federal	GW	P
4304734970	RBU 12-3E	NWSW		03	100S	190E	U-013765	7050	Federal	GW	P
4304734971	RBU 15-3E	SWSE		03	100S	190E	U-35316	7050	Federal	GW	P
4304734974	RBU 12-10E	NWSW		10	100S	190E	U-013792	14025	Federal	GW	P
4304734975	RBU 14-10E	NENW		15	100S	190E	U-013766	7050	Federal	GW	P
4304734976	RBU 16-13E	SESE		13	100S	190E	U-013765	7050	Federal	GW	P
4304734977	RBU 8-14E	SENE		14	100S	190E	U-013792	7050	Federal	GW	P
4304734978	RBU 6-15E	SENW		15	100S	190E	U-013766	7050	Federal	GW	P
4304734979	RBU 12-15E	NWSW		15	100S	190E	U-013766	7050	Federal	GW	P
4304734981	RBU 16-17E	SESE		17	100S	190E	U-013766	7050	Federal	GW	P
4304734982	RBU 8-21E	SENE		21	100S	190E	U-013766	7050	Federal	GW	P
4304734983	RBU 4-22E	NWNW		22	100S	190E	U-013792	7050	Federal	GW	P
4304734986	RBU 2-20F	NWNE		20	100S	200E	U-03505	7050	Federal	GW	P
4304734987	RBU 9-20E	SWNW		21	100S	190E	U-03505	7050	Federal	GW	P
4304734989	RBU 7-20E	NENE		20	100S	190E	U-03505	7050	Federal	GW	P
4304734990	RBU 8-20E	SWNW		21	100S	190E	U-03505	14164	Federal	GW	P
4304735041	RBU 16-23E	SWSE		23	100S	190E	U-013766	7050	Federal	GW	P

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well_name	qtr	qtr	sec	twp	rng	lease_num	entity	Lease	well	stat
4304735042	RBV 12-22E	NWSW	22	100S	190E	U-013792	14165	Federal	GW	P	
4304735058	RBV 7-23F	SWNE	23	100S	200E	U-013793-A	7050	Federal	GW	P	
4304735059	RBV 12-13E	NWSW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304735060	RBV 14-13E	SESW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304735061	RBV 2-22E	NWNE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304735062	RBV 6-24E	SESW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304735082	RBV 4-17E	NWNW	17	100S	190E	U-03505	7050	Federal	GW	P	
4304735086	RBV 16-14E	NENE	23	100S	190E	U-013792	7050	Federal	GW	P	
4304735087	RBV 2-3E	NWNE	03	100S	190E	U-013765	7050	Federal	GW	P	
4304735088	RBV 6-3E	SESW	03	100S	190E	U-03505	7050	Federal	GW	P	
4304735100	RBV 10-10E	NWSE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304735101	RBV 16-22E	SESE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304735112	RBV 14-24E	SESW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304735129	RBV 6-21F	SESW	21	100S	200E	U-013793-A	7050	Federal	GW	P	
4304735170	RBV 1-9E	NESE	09	100S	190E	U-03505	7050	Federal	GW	P	
4304735171	RBV 16-9E	NESE	09	100S	190E	U-013765	7050	Federal	GW	P	
4304735232	RBV 14-21F	SESW	21	100S	200E	U-0143520	7050	Federal	GW	P	
4304735250	RBV 13-19F2	NWSW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304735251	RBV 15-19F	SWSE	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304735270	RBV 16-21E	SESE	21	100S	190E	U-013766	7050	Federal	GW	P	
4304735304	RBV 13-20F	SWSW	20	100S	200E	U-013769	7050	Federal	GW	P	
4304735305	RBV 4-21F	NWNW	21	100S	200E	U-013793-A	7050	Federal	GW	P	
4304735306	RBV 16-21F	SESE	21	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304735468	RBV 15-22F	SWSE	22	100S	200E	U-01470-A	7050	Federal	GW	P	
4304735469	RBV 11-23F	SESW	23	100S	200E	U-01470A	7050	Federal	GW	P	
4304735549	RBV 1-14F	NENE	14	100S	200E	UTU-013793-A	7050	Federal	GW	P	
4304735640	RBV 2-21E	NWNE	21	100S	190E	U-013766	7050	Federal	GW	P	
4304735644	RBV 10-17E	NWSE	17	100S	190E	U-013766	7050	Federal	GW	P	
4304735645	RBV 12-21E	NWSW	21	100S	190E	U-013766	7050	Federal	GW	P	
4304736200	RBV 8-17E	SWNE	17	100S	190E	U-013766	7050	Federal	GW	P	
4304736201	RBV 15-17EX	SWSE	17	100S	190E	U-013766	7050	Federal	GW	P	
4304736293	RBV 2-10E	NWNE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304736294	RBV 6-10E	NENW	10	100S	190E	U-013792	7050	Federal	GW	P	
4304736296	RBV 6-21E	SESW	21	100S	190E	U-013766	7050	Federal	GW	P	
4304736297	RBV 10-22E	NWSE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304736318	RBV 14-22E	SESW	22	100S	190E	U-013792	7050	Federal	GW	P	
4304736427	RBV 9-15E	NESE	15	100S	190E	U-013766	7050	Federal	GW	DRL	
4304736428	RBV 2-17E	NWNE	17	100S	190E	U-013766	7050	Federal	GW	P	
4304736429	RBV 1-17E	NENE	17	100S	190E	U-013766	7050	Federal	GW	DRL	
4304736432	RBV 3-19F2	NWNW	19	100S	200E	U-013769-A	15234	Federal	GW	P	
4304736433	RBV 14-17F	SESW	17	100S	200E	U-03505	7050	Federal	GW	P	
4304736434	RBV 2-19F	NWNE	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304736435	RBV 5-19FX	SWNW	19	100S	200E	U-013769-A	15855	Federal	GW	P	
4304736436	RBV 4-20F	NWNW	20	100S	200E	U-013793-A	7050	Federal	GW	P	
4304736605	RBV 16-14F	SESE	14	100S	200E	U-013793A	7050	Federal	GW	P	
4304736608	RBV 4-3E	NWNW	03	100S	190E	U-035316	7050	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well name	qtr	qtr	sec	tpw	rng	lease num	entity	Lease	well	stat
4304736609	RBU 8-3E	SENE	03	100S	190E	U-013765	7050	Federal	GW	P	
4304736610	RBU 14-3E	SESW	03	100S	190E	U-013765	7050	Federal	GW	P	
4304736686	RBU 13-3E	NWSW	03	100S	190E	U-013765	15235	Federal	GW	P	
4304736810	RBU 1-3E	NENE	03	100S	190E	U-013765	7050	Federal	GW	DRL	
4304736850	RBU 2-10F	NWNE	10	100S	200E	U-7206	7050	Federal	GW	P	
4304736851	RBU 8-21F	SENE	21	100S	200E	U-013793-A	7050	Federal	GW	P	
4304737033	RBU 4-10E	SWNW	10	100S	190E	U-035316	7050	Federal	GW	P	
4304737057	RBU 11-17E	NWSE	17	100S	190E	U-03505	7050	Federal	GW	DRL	
4304737058	RBU 3-17E	NENW	17	100S	190E	U-03505	7050	Federal	GW	P	
4304737201	RBU 3-23F	NENW	23	100S	200E	U-013793-A	7050	Federal	OW	P	
4304737341	RBU 11-20F	NESW	20	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304737342	RBU 5-15F	SWNW	15	100S	200E	U-7206	7050	Federal	OW	P	
4304737343	RBU 10-16F	NWSE	16	100S	200E	U-7206	7050	Federal	OW	P	
4304737344	RBU 9-16F	NESE	16	100S	200E	U-7206	7050	Federal	OW	S	
4304737450	RBU 14-17E	SESW	17	100S	190E	U-03505	7050	Federal	GW	P	
4304737747	RBU 15-9E	NWNE	16	100S	190E	U-013765	7050	Federal	GW	DRL	
4304737893	RBU 9-4EA	SENE	04	100S	190E	U-03505	7050	Federal	GW	P	
4304737998	RBU 13-23F	SWSW	23	100S	200E	U-01470-A	7050	Federal	GW	P	
4304738181	RBU 12-4E	SWNW	04	100S	190E	U-03576	99999	Federal	GW	DRL	
4304738182	RBU 11-4E	SE/4	04	100S	190E	U-03505	99999	Federal	GW	DRL	
4304738294	RBU 2-4E	NWNE	04	100S	190E	U-013792	7050	Federal	GW	DRL	
4304738295	RBU 5-4E	SWNW	04	100S	190E	U-03576	99999	Federal	GW	DRL	
4304738543	RBU 28-18F	NESE	13	100S	190E	U 013793-A	7050	Federal	GW	DRL	
4304738548	RBU 32-13E	NESE	13	100S	190E	U-013765	7050	Federal	GW	DRL	
4304738555	RBU 27-18F	SWSW	18	100S	200E	U-013793	7050	Federal	GW	DRL	
4304738556	RBU 27-18F2	SWSW	18	100S	200E	U-013793	7050	Federal	GW	DRL	
4304738557	RBU 30-18F	SWSW	18	100S	200E	U-013793	7050	Federal	GW	P	
4304738558	RBU 29-18F	SWSW	18	100S	200E	U-013793	7050	Federal	GW	DRL	
4304738595	RBU 31-10E	NENE	15	100S	190E	U-013792	7050	Federal	GW	DRL	
4304738596	RBU 17-15E	NENE	15	100S	190E	U-013766	7050	Federal	GW	DRL	
4304738780	RBU 8B-17E	SENE	17	100S	190E	U-013766	7050	Federal	GW	DRL	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well name	qtr	qtr	sec	twp	rng	lease_num	entity	Lease	well	stat
4304730153	NATURAL 1-2	SE	NW	02	100S	200E	ML-10716	11377	State	OW	PA
4304730260	RBU 11-16E	NE	SW	16	100S	190E	ML-13214	7050	State	GW	S
4304730583	RBU 11-36B	NE	SW	36	090S	190E	ML-22541	99998	State	NA	PA
4304730608	RBU 8-16D	SE	NE	16	100S	180E	ML-13216	99998	State	NA	PA
4304730760	RBU 11-2F	NE	SW	02	100S	200E	ML-10716	9966	State	OW	S
4304731740	RBU 1-16E	NE	NE	16	100S	190E	ML-13214	7050	State	GW	P
4304732026	RBU 16-2F	SE	SE	02	100S	200E	ML-10716	7050	State	GW	P
4304732042	RBU 9-16E	NE	SE	16	100S	190E	ML-13214	7050	State	GW	P
4304732108	RBU 14-2F	SE	SW	02	100S	200E	ML-10716	7050	State	GW	P
4304732136	RBU 8-2F	SE	NE	02	100S	200E	ML-10716	7050	State	GW	P
4304732137	RBU 5-16E	SW	NW	16	100S	190E	ML-13214	7050	State	GW	P
4304732245	RBU 7-16E	SW	NE	16	100S	190E	ML-13214	7050	State	GW	PA
4304732250	RBU 13-16E	SW	SW	16	100S	190E	ML-13214	7050	State	GW	S
4304732292	RBU 15-16E	SW	SE	16	100S	190E	ML-13214	7050	State	GW	PA
4304732314	RBU 10-2F	NW	SE	02	100S	200E	ML-10716	7050	State	GW	P
4304732352	RBU 3-16F	NE	NW	16	100S	200E	ML-3393-A	7050	State	GW	P
4304733360	RBU 1-16F	NE	NE	16	100S	200E	ML-3393	7050	State	GW	P
4304734061	RBU 6-16E	SW	NE	16	100S	190E	ML-13214	7050	State	GW	P
4304734167	RBU 1-2F	NE	NE	02	100S	200E	ML-10716		State	GW	LA
4304734315	STATE 11-2D	NE	SW	02	100S	180E	ML-26968		State	GW	LA
4304734903	RBU 14-16E	SW	SW	16	100S	190E	ML-13214	7050	State	D	PA
4304735020	RBU 8-16E	SE	NE	16	100S	190E	ML-13214	7050	State	GW	P
4304735021	RBU 10-16E	SW	SE	16	100S	190E	ML-13214	7050	State	GW	P
4304735022	RBU 12-16E	NE	SW	16	100S	190E	ML-13214	7050	State	GW	P
4304735023	RBU 16-16E	SW	SW	15	100S	190E	ML-13214	7050	State	GW	P
4304735033	RBU 2-16E	NW	NE	16	100S	190E	ML-13214	7050	State	GW	P
4304735081	RBU 15-2F	SW	SE	02	100S	200E	ML-10716	7050	State	GW	P
4304735348	RBU 13-16F	NW	NW	21	100S	200E	ML-3394	7050	State	GW	DRL
4304736169	RBU 4-16E	NE	NW	16	100S	190E	ML-13214	7050	State	GW	P
4304736170	RBU 3-16E	NE	NW	16	100S	190E	ML-13214	7050	State	GW	P



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155



IN REPLY REFER TO
3180
UT-922

Dominion Exploration & Production, Inc.
Attn: James D. Abercrombie
14000 Quail Springs Parkway, #600
Oklahoma City, OK 73134-2600

August 10, 2007

Re: River Bend Unit
Uintah County, Utah

Gentlemen:

On August 8, 2007, we received an indenture dated June 30, 2007, whereby Dominion Exploration & Production, Inc. resigned as Unit Operator and XTO Energy Inc. was designated as Successor Unit Operator for the River Bend Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective August 15, 2007. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the River Bend Unit Agreement.

Your statewide oil and gas bond No. UTB000138 will be used to cover all operations within the River Bend Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Greg J. Noble

Greg J. Noble
Acting Chief, Branch of Fluid Minerals

Enclosure

RECEIVED
AUG 16 2007
DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9	
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-013769-A	
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
1. TYPE OF WELL Gas Well		7. UNIT or CA AGREEMENT NAME: RIVER BEND	
2. NAME OF OPERATOR: XTO ENERGY INC		8. WELL NAME and NUMBER: RBU 2-19F	
3. ADDRESS OF OPERATOR: 382 Road 3100 , Aztec, NM, 87410		9. API NUMBER: 43047364340000	
PHONE NUMBER: 505 333-3145 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0684 FNL 1823 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNE Section: 19 Township: 10.0S Range: 20.0E Meridian: S		COUNTY: UINTAH	
		STATE: UTAH	
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start: <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 1/16/2012 <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input checked="" type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.			
XTO Energy Inc. has performed an acid treatment on this well per the attached summary report.			
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY February 13, 2012			
NAME (PLEASE PRINT) Barbara Nicol	PHONE NUMBER 505 333-3642	TITLE Regulatory Compliance Tech	
SIGNATURE N/A		DATE 2/13/2012	

Riverbend Unit 02-19F

1/6/2012: MIRU SLU. SN @ 8,103'. RIH w/fishing t/s. Latch BHBS. POH w/BHBS & fishing t/s. RDMO SLU.

1/9/2012: MIRU pmp trk. 750 gal 15% HCl ac contain 2 gal Fe control, 28 gal sc inhib, 15 gal mutual solvent, 15 gal H₂S scav. Pmp dwn tbg w/250 gal 15% HCl ac w/adds & flsh w/32 bbls 2% KCl wtr. Pmp dwn csg w/500 gal 15% HCl ac w/adds & flsh w/32 bbls 2% KCl wtr. RDMO.

1/10/2012: MIRU SWU. RIH w/swb t/s. BFL @ 6,800' FS. S 0 BO, 20 BW. 20 runs, 10 hrs. FFL @ 7,400' FS.

1/12/2012: RIH w/swb t/s. BFL @ 6,900' FS. S 0 BO, 5 BW. 5 runs, 5 hrs. FFL @ 7,400' FS.

1/13/2012: RIH w/swb t/s. BFL @ 7,400' FS. S 0 BO, 10 BW. 10 runs, 10 hrs. FFL @ 7,800' FS.

1/16/2012: RIH w/swb t/s. BFL @ 7,100' FS. S 0 BO, 8 BW. 8 runs, 5 hrs. FFL @ 7,500' FS. Well KO flwg. RDMO SWU. RWTP.