

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

1a. Type of Work: DRILL REENTER

b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

5. Lease Serial No.
UTU-37355

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

2. Name of Operator
KERR MCGEE OIL & GAS ONSHORE LP

8. Lease Name and Well No.
BONANZA 1023-17A

3A. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

9. API Well No.
43-047-38239

4. Location of Well (Report location clearly and in accordance with any State requirements.)*
At surface **NENE 682'FNL, 675'FEL 641535X 39.954284**
At proposed prod. Zone **4423788Y -109.343087**

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. Sec., T., R., M., or Blk, and Survey or Area
SECTION 17, T10S, R23E

14. Distance in miles and direction from nearest town or post office*
27.5 MILES SOUTHEAST OF OURAY, UTAH

12. County or Parish
UINTAH

13. State
UTAH

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)
675'

16. No. of Acres in lease
1920.00

17. Spacing Unit dedicated to this well
40.00

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.
REFER TO TOPO C

19. Proposed Depth
7800'

20. BLM/BIA Bond No. on file
BOND NO. 2971100-2533

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
5193'GL


22. Approximate date work will start*


23. Estimated duration

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| <ul style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office. | <ul style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be required by the authorized office. |
|---|--|

25. Signature 	Name (Printed/Typed) SHEILA UPCHEGO	Date 5/31/2006
---	---	--------------------------

Title REGULATORY ANALYST	Name (Printed/Typed) BRADLEY G. HILL	Date 06-15-06
Approved by Signature 	Office ENVIRONMENTAL MANAGER	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

Federal Approval of this
Action Is Necessary

JUN 05 2006

T10S, R23E, S.L.B.&M.

Kerr-McGee Oil & Gas Onshore LP

Well location, BONANZA #1023-17A, located as shown in the NE 1/4 NE 1/4 of Section 17, T10S, R23E, S.L.B.&M. Uintah County, Utah.


1995 Alum. Cap,
0.7' High, Pile
of Stones

N89°40'21"E - 2640.03' (Meas.)

S89°40'57"W - 2627.40' (Meas.)

1995 Alum. Cap,
0.1' High Above
1.0' High Pile of
Stones Around Cap,
Second Pile ELY

1995 Alum. Cap,
0.6' Above 2.5'
High Pile of
Stones



BONANZA #1023-17A
Elev. Ungraded Ground = 5193'

500°04'32"E - 2644.56' (Meas.)

500°14'45"W - 2585.41' (Meas.)

W.C. 1995 Alum.
Cap, 0.4' Above
1.0' High Pile
of Stones

66.00' (G.L.O.)

17

1996 Alum. Cap,
0.4' High, Pile of
Stones

True
Position

N00°16'E - 2651.22' (G.L.O.)

500°00'30"W - 2653.03' (Meas.)

1995 Alum. Cap
1.0' High, Pile of
Stones

1996 Alum. Cap,
0.6' High, Pile of
Stones

S89°11'W - 2664.42' (G.L.O.)

N89°56'10"W - 2629.83' (Meas.)

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED
- △ = SECTION CORNERS RE-ESTABLISHED. (Not Set on Ground.)


(NAD 83)
LATITUDE = 39°57'15.86" (39.954406)
LONGITUDE = 109°20'37.39" (109.343719)
(NAD 27)
LATITUDE = 39°57'15.98" (39.954439)
LONGITUDE = 109°20'34.95" (109.343042)

BASIS OF ELEVATION

BENCH MARK 58 EAM (1965) LOCATED IN THE NE 1/4 OF SECTION 30, T9S, R23E, S.L.B.&M. TAKEN FROM THE RED WASH SE, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5132 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

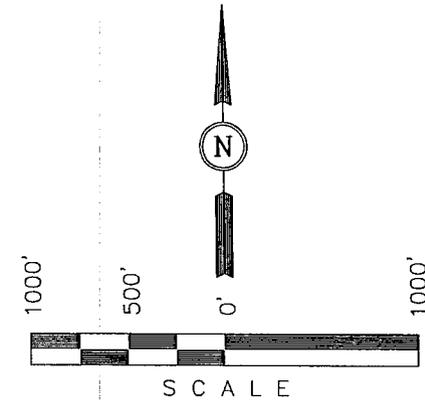

CERTIFICATE
 THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.
John D. [Signature]
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 02-27-06	DATE DRAWN: 03-07-06
PARTY J.R. L.M. C.H.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE Kerr-McGee Oil & Gas Onshore LP	

**BONANZA #1023-17A
NE/NE Sec. 17, T10S,R23E
UINTAH COUNTY, UTAH
UTU-37355**

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	927'
Top of Birds Nest Water	1122'
Mahogany	1718'
Wasatch	3816'
Mesaverde	5916'
MVU2	6766'
MVL1	7310'
TD	7800'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Water	Green River	927'
	Top of Birds Nest Water	1122'
	Mahogany	1718'
Gas	Wasatch	3816'
Gas	Mesaverde	5916'
Gas	MVU2	6766'
Gas	MVL1	7310'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

Please refer to the attached Drilling Program.

4. Proposed Casing & Cementing Program:

Please refer to the attached Drilling Program.

5. Drilling Fluids Program:

Please refer to the attached Drilling Program.

6. Evaluation Program:

Please refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 7800' TD, approximately equals 4836 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3120 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variations:**

Please refer to the attached Drilling Program.

10. **Other Information:**

Please refer to the attached Drilling Program.



KERR-McGEE OIL & GAS ONSHORE LP DRILLING PROGRAM

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE May 31, 2006
 WELL NAME BONANZA 1023-17A TD 7,800' MD/TVD
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,193' GL KB 5,208'
 SURFACE LOCATION NENE SECTION 17, T10S, R23E 682°FNL, 675°FEL BHL Straight Hole
 Latitude: 39.954406 Longitude: 109.343719
 OBJECTIVE ZONE(S) Wasatch/Mesaverde
 ADDITIONAL INFO Regulatory Agencies: BLM (SURF & MINERALS), UDOGM, Tri-County Health Dept.

GEOLOGICAL FORMATION		MECHANICAL			
LOGS	TOPS	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 32.3#, H-40, STC	Air mist
Catch water sample, if possible, from 0 to 3,816' Green River @ 0,927' Top of Birds Nest Water @ 1,122' Mahogany @ 1,718' Preset f/ GL @ 1,730' MD					
Note: 12.25" surface hole will usually be drilled ±400' below the bottom of lost circulation zone. Drilled depth may be ±200' of the estimated set depth depending on the actual depth of the loss zone.					
Mud logging program TBD Open hole logging program f/ TD - surf csg			7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	Water/Fresh Water Mud 8.3-11.0 ppg
	Wasatch @	3,816'			
	Mverde @	5,916'			
	MVU2 @	6,766'			
	MVL1 @	7,310'			
	TD @	7,800'			Max anticipated Mud required 11.0 ppg



**KERR-McGEE OIL & GAS ONSHORE LP
DRILLING PROGRAM**

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1730	32.30	H-40	STC	0.83*****	1.69	5.19
PRODUCTION	4-1/2"	0 to 7800	11.60	I-80	LTC	7780	6350	201000
						2.83	1.42	2.55

1) Max Anticipated Surf. Press. (MASP) (Surface Casing) = (Pore Pressure at next csg point - (0.22 psi/ft-partial evac gradient x TVD of next csg point))
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
 (Burst Assumptions: TD = 11.0 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
 MASP 2746 psi

***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE	LEAD	1500	NOTE: If well will circulate water to surface, option 2 will be utilized Prem cmt + 16% Gel + 10 pps gilsonite +.25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
Option 2	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,310'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	360	60%	11.00	3.38
	TAIL	4,490'	50/50 Poz/G + 10% salt + 2% gel +.1% R-3	1260	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained
 *Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION



Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.
 BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.
 Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.
 Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: _____
 Brad Laney

DRILLING SUPERINTENDENT: _____
 Randy Bayne

DATE: _____
 DATE: _____

5M BOP STACK and CHOKE MANIFOLD SYSTEM

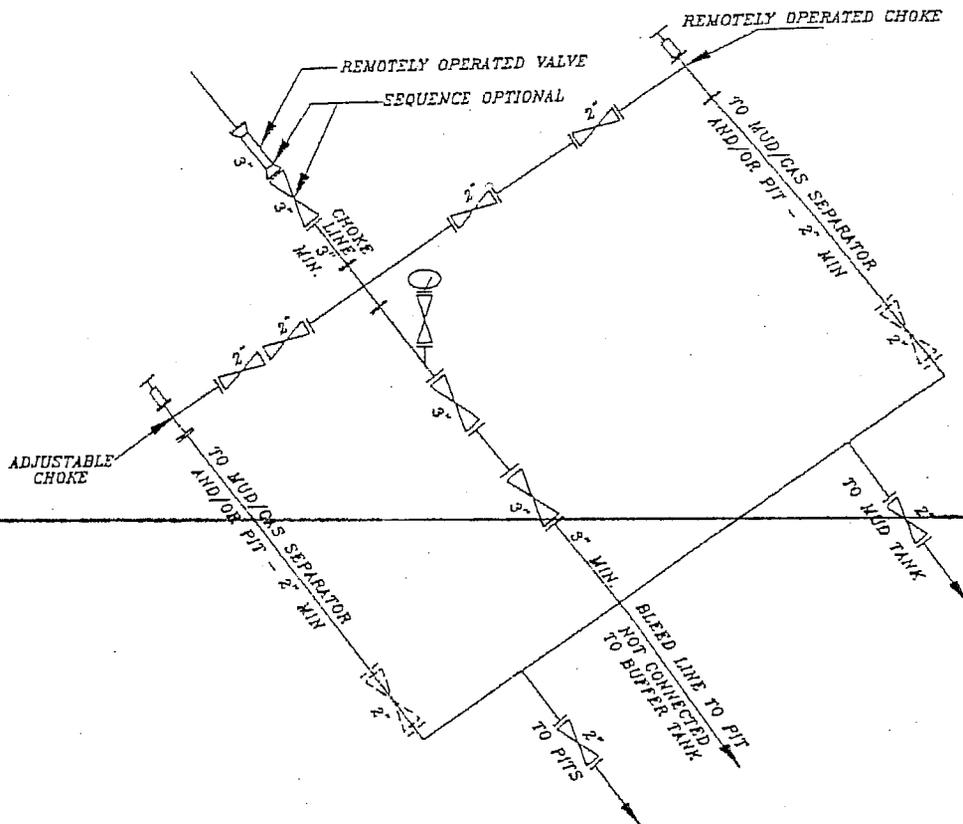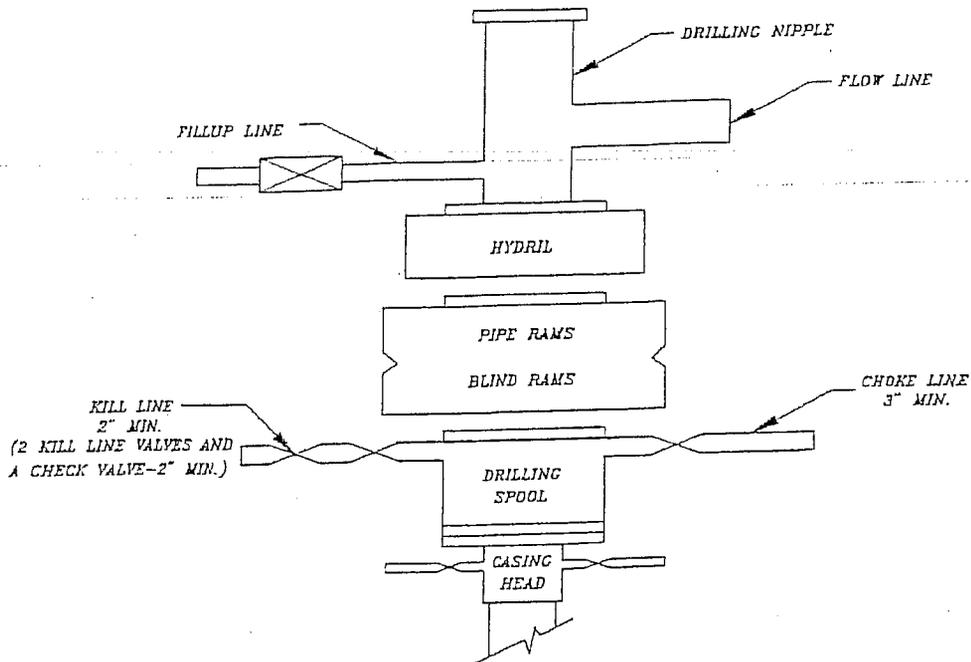

**BONANZA 1023-17A
NE/NE SECTION 17, T10S, R23E
UINTAH COUNTY, UTAH
UTU-37355**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Directions to the proposed location are attached.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

Approximately 200' +/- of new access roads is proposed. Refer to Topo Map B.

The access road will be crowned (2 to 3%), ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe and usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free-flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing or shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches, and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. Location of Existing Wells Within a 1-Mile Radius

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities & Pipelines

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon (2.5 Y 6/2) as determined during the on-site inspection.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Variances to Best Management Practices (BMP) Requests:

Approximately 100' of 4" steel pipeline. Please refer to the Topo Map D. The pipeline will be butt-welded together.

The pipeline shall be installed on surface within access corridor for the well location. As a Best Management Practice (BMP), the pipeline would be buried within the access road corridor if possible. The construction of pipelines requires the corridor of 30 feet.

This exception to the BMP should be granted by the BLM Authorized Officer because indurated bedrock, such as sandstone, is at or within 2 feet of the surface and the soil has a poor history for successful rehabilitation.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec.32, T4S,R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. **Methods of Handling Waste Materials**

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of 20 mil thick and felt with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec.35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E. (Request is in lieu of filing Form 3160-5, after initial production).

8. **Ancillary Facilities**

None are anticipated.

9. **Well Site Layout:** (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. **Plans for Reclamation of the Surface:**

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

When the pit is backfilled, the topsoil pile shall be spread on the location up to the rig anchor points. The location will be reshaped to the original contour to the extent possible. The following seed mixture will be used to reclaim the surface for interim reclamation using appropriate reclamation methods. A total of 12 lbs/acre will be used if the seeds are drilled (24 lbs/acre if the seeds are broadcast). The per acre requirements for drilled seeds are:

Crested Wheatgrass	4 lbs.
Needle and Thread Grass	4 lbs
Indian Rice Grass	4 lbs.

The operator shall call BLM for the seed mixture when final reclamation occurs.

11. Surface Ownership:

United States of America
Bureau of Land Management
170 South 500 East
Vernal, UT 84078
(435) 781-4400

12. Other Information:

A Class III Archaeological Report has been performed and completed on April 27, 2005, the Archaeological Report No. 05-114.
Paleontological Reconnaissance Report will be submitted when report becomes available.

WILDLIFE STIPULATIONS:

CRITICAL WILDLIFE HABITAT: No construction or drilling activity May 10th – July 15th.
Submit a letter to the BLM requesting a stipulation waiver.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance. The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

13. Lessee's or Operators's Representative & Certification:

Sheila Upchego
Regulatory Analyst
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435) 781-7024

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Westport Oil & Gas Company agrees to be responsible under the terms and the conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by BLM Nationwide Bond #2971100-2533.

I hereby certify that the proposed drill site and access route has been inspected and that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Sheila Upchego

May 31, 2006

Date

KERR-MCGEE OIL & GAS ONSHORE LP
BONANZA #1023-17A
SECTION 17, T10S, R23E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 3.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 5.1 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN RIGHT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY, THEN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 0.8 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE BONANZA #1023-17H TO THE SOUTHEAST; FOLLOW ROAD FLAGS IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 500' TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; ~~FOLLOW ROAD FLAGS IN A~~ NORTHEASTERLY DIRECTION APPROXIMATELY 200' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 58.7 MILES.

KERR-MCGEE OIL & GAS ONSHORE LP

BONANZA #1023-17A

LOCATED IN UINTAH COUNTY, UTAH
SECTION 17, T10S, R23E, S.L.B.&M.

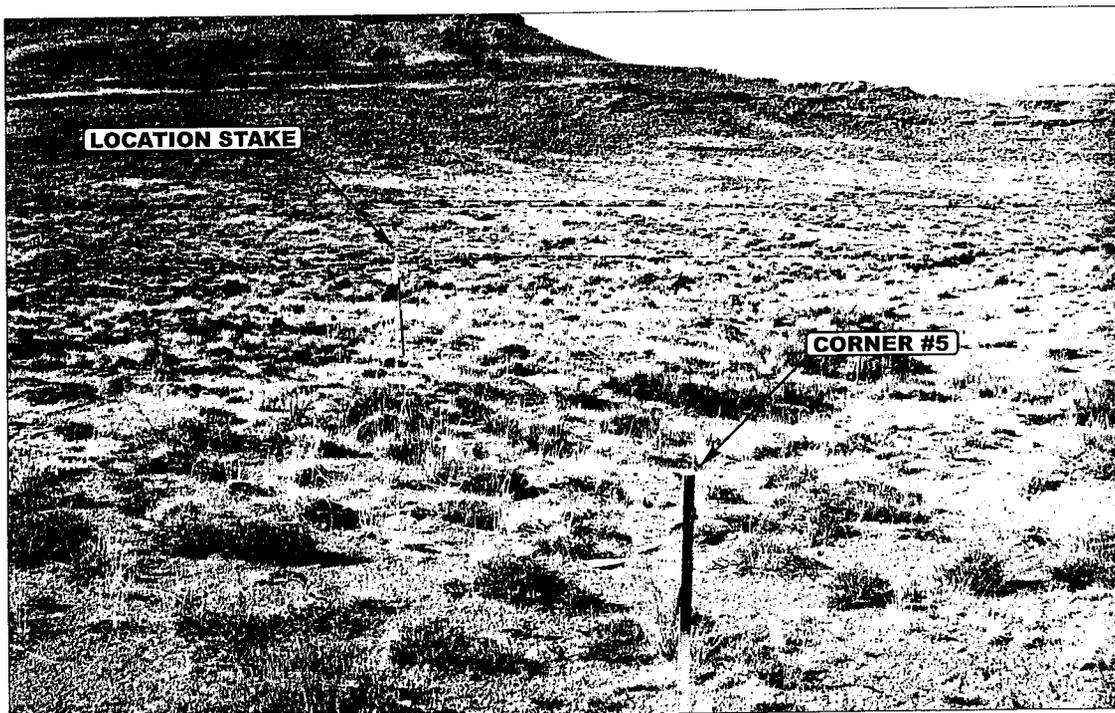


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY

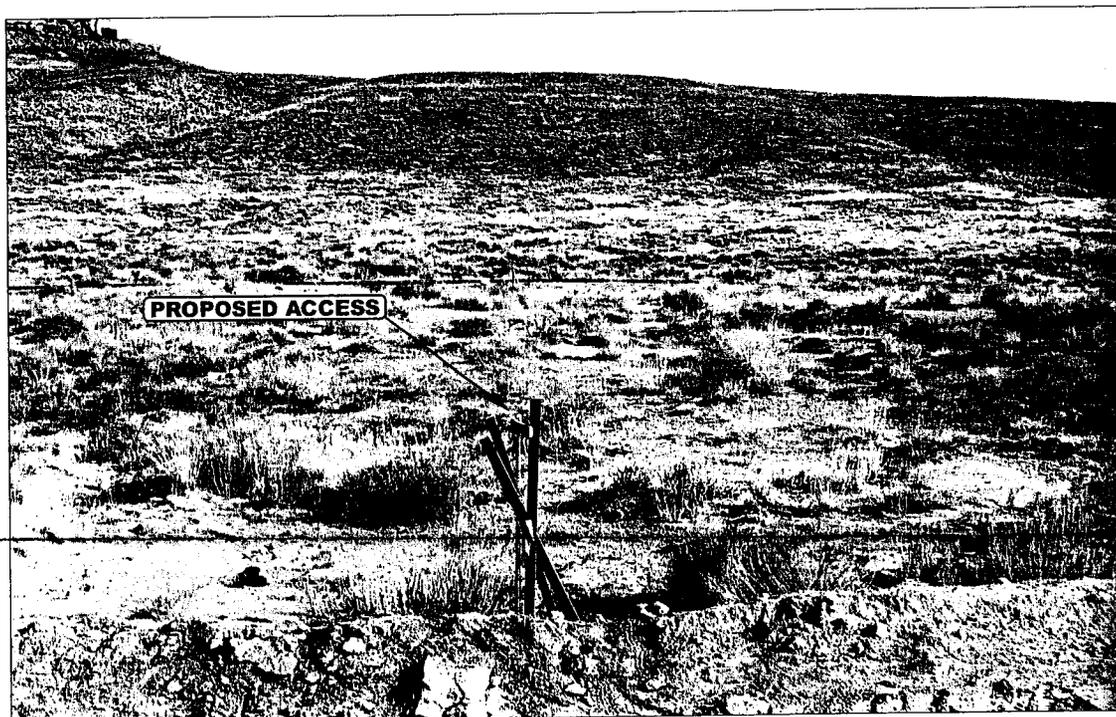


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: SOUTHEASTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	03	10	06	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: J.R.	DRAWN BY: LDK	REVISED: 00-00-00		

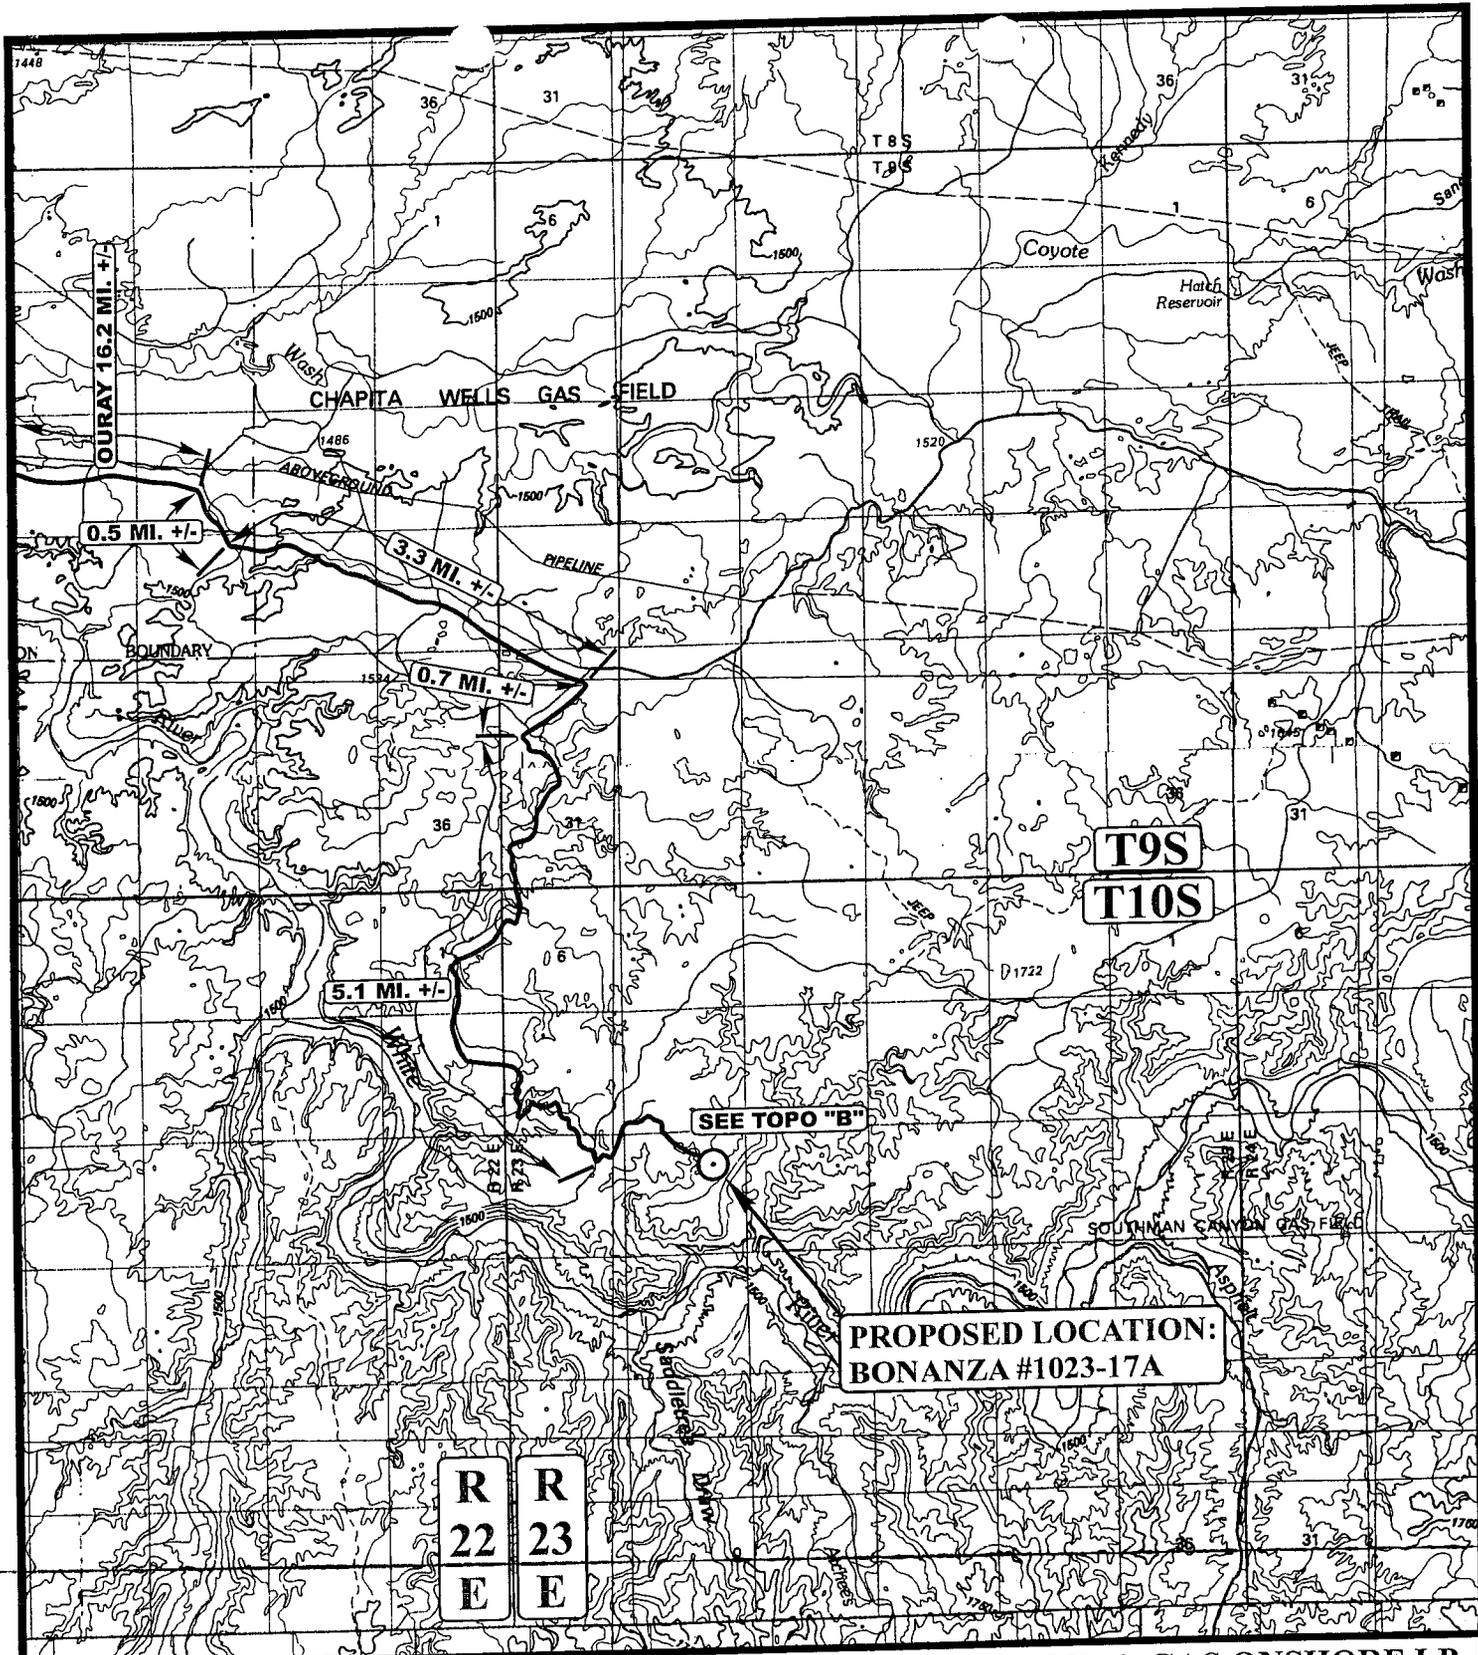

**PROPOSED LOCATION:
BONANZA #1023-17A**

**R R
22 23
E E**

**T9S
T10S**

LEGEND:

○ PROPOSED LOCATION



KERR-MCGEE OIL & GAS ONSHORE LP

**BONANZA #1023-17A
SECTION 17, T10S, R23E, S.L.B.&M.
682' FNL 675' FEL**





Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP
03 10 06
MONTH DAY YEAR
SCALE: 1:100,000 DRAWN BY: LDK REVISED: 00-00-00



T10S

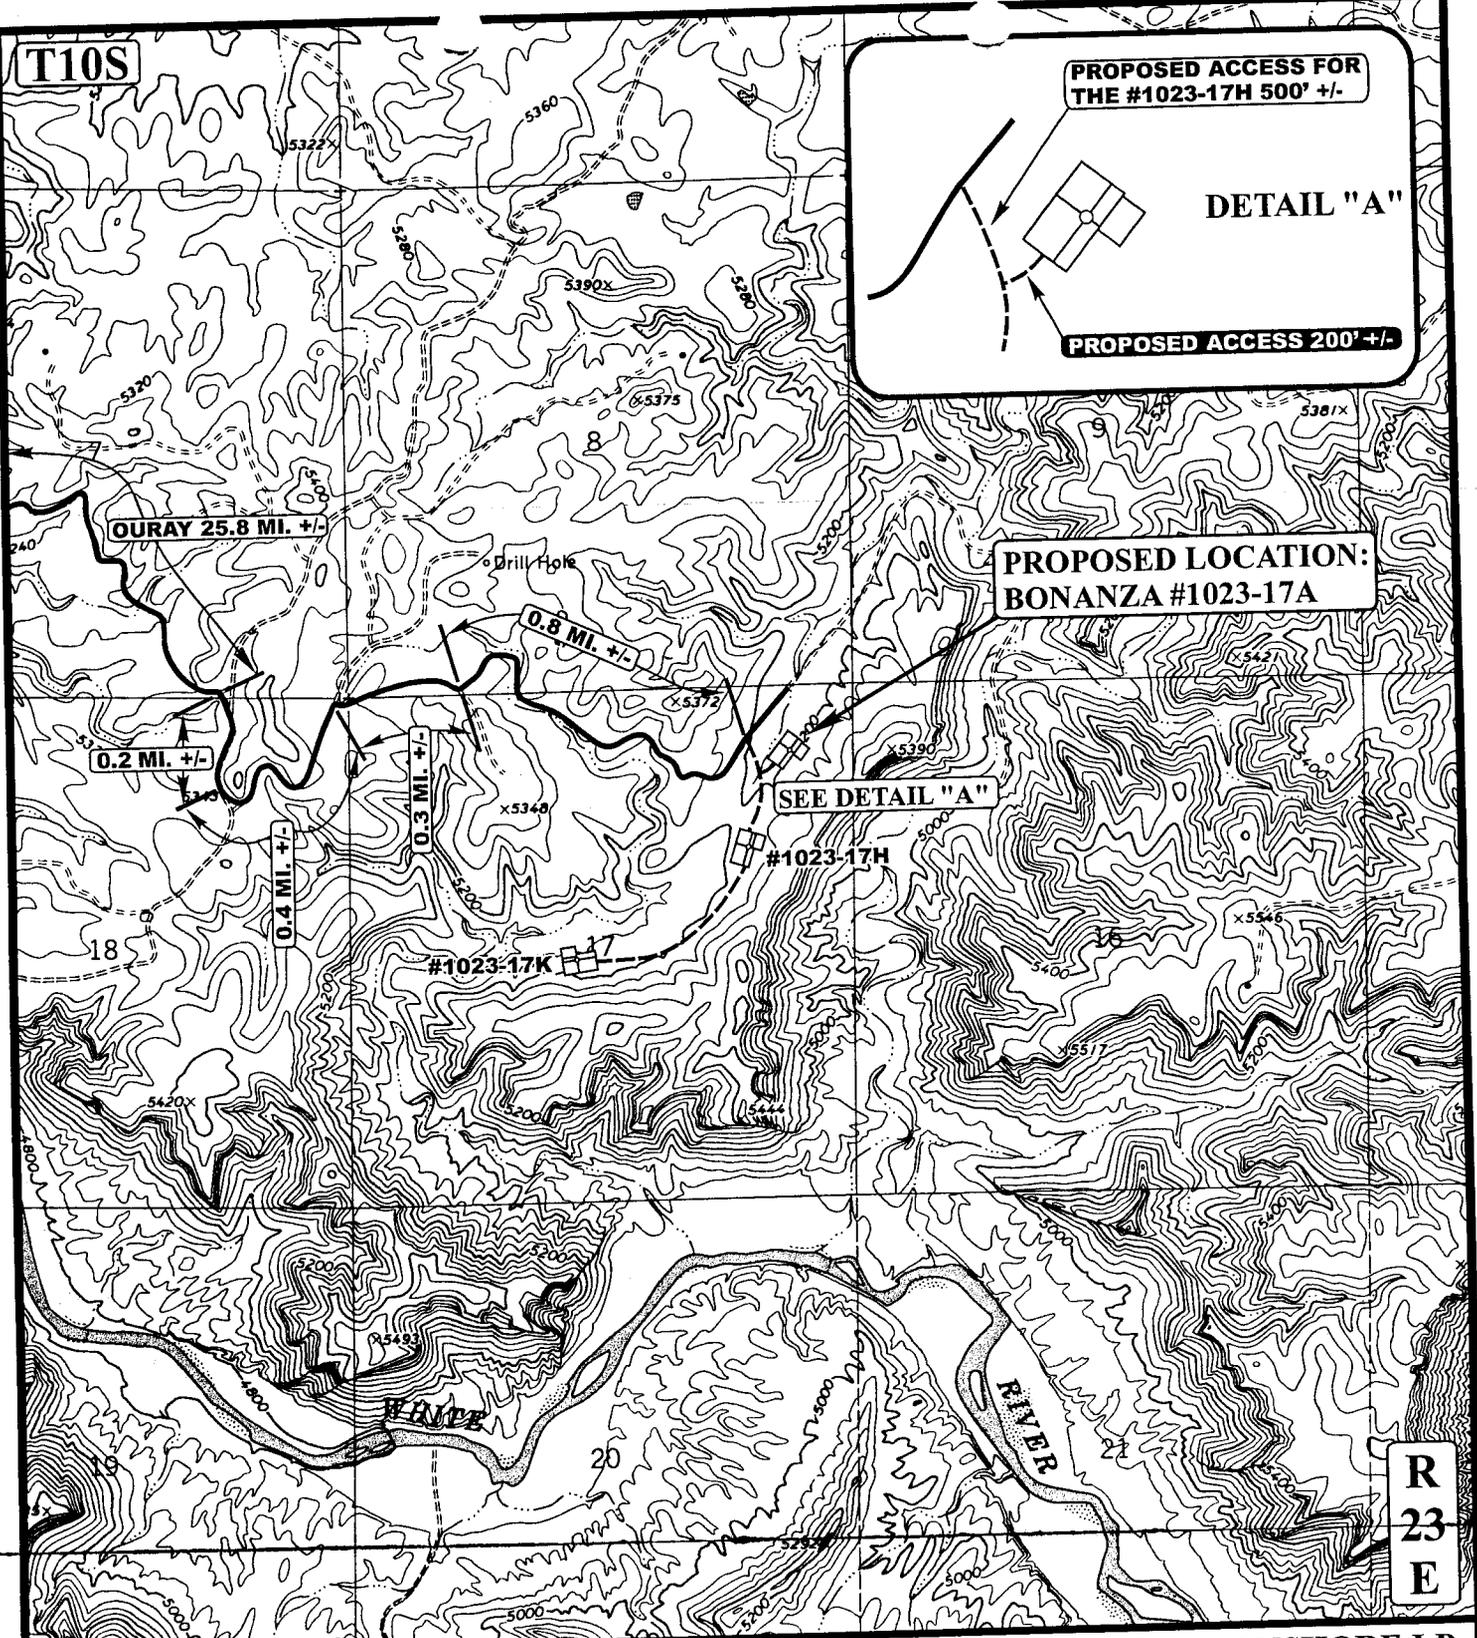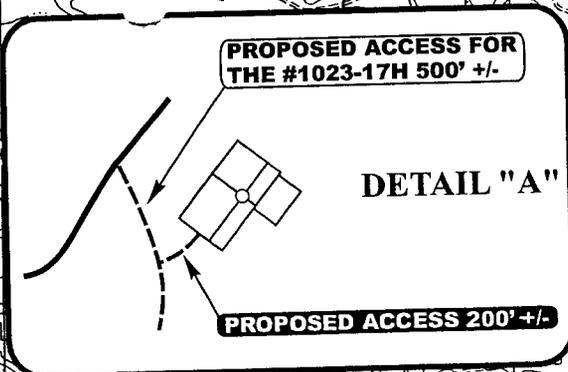

**PROPOSED LOCATION:
BONANZA #1023-17A**

SEE DETAIL "A"

**R
23
E**

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



KERR-MCGEE OIL & GAS ONSHORE LP


BONANZA #1023-17A
SECTION 17, T10S, R23E, S.L.B.&M.
682' FNL 675' FEL

U E L S
Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP	03	10	06
	MONTH	DAY	YEAR
SCALE: 1" = 2000'	DRAWN BY: LDK		REVISED: 00-00-00

**B
TOPO**

T10S

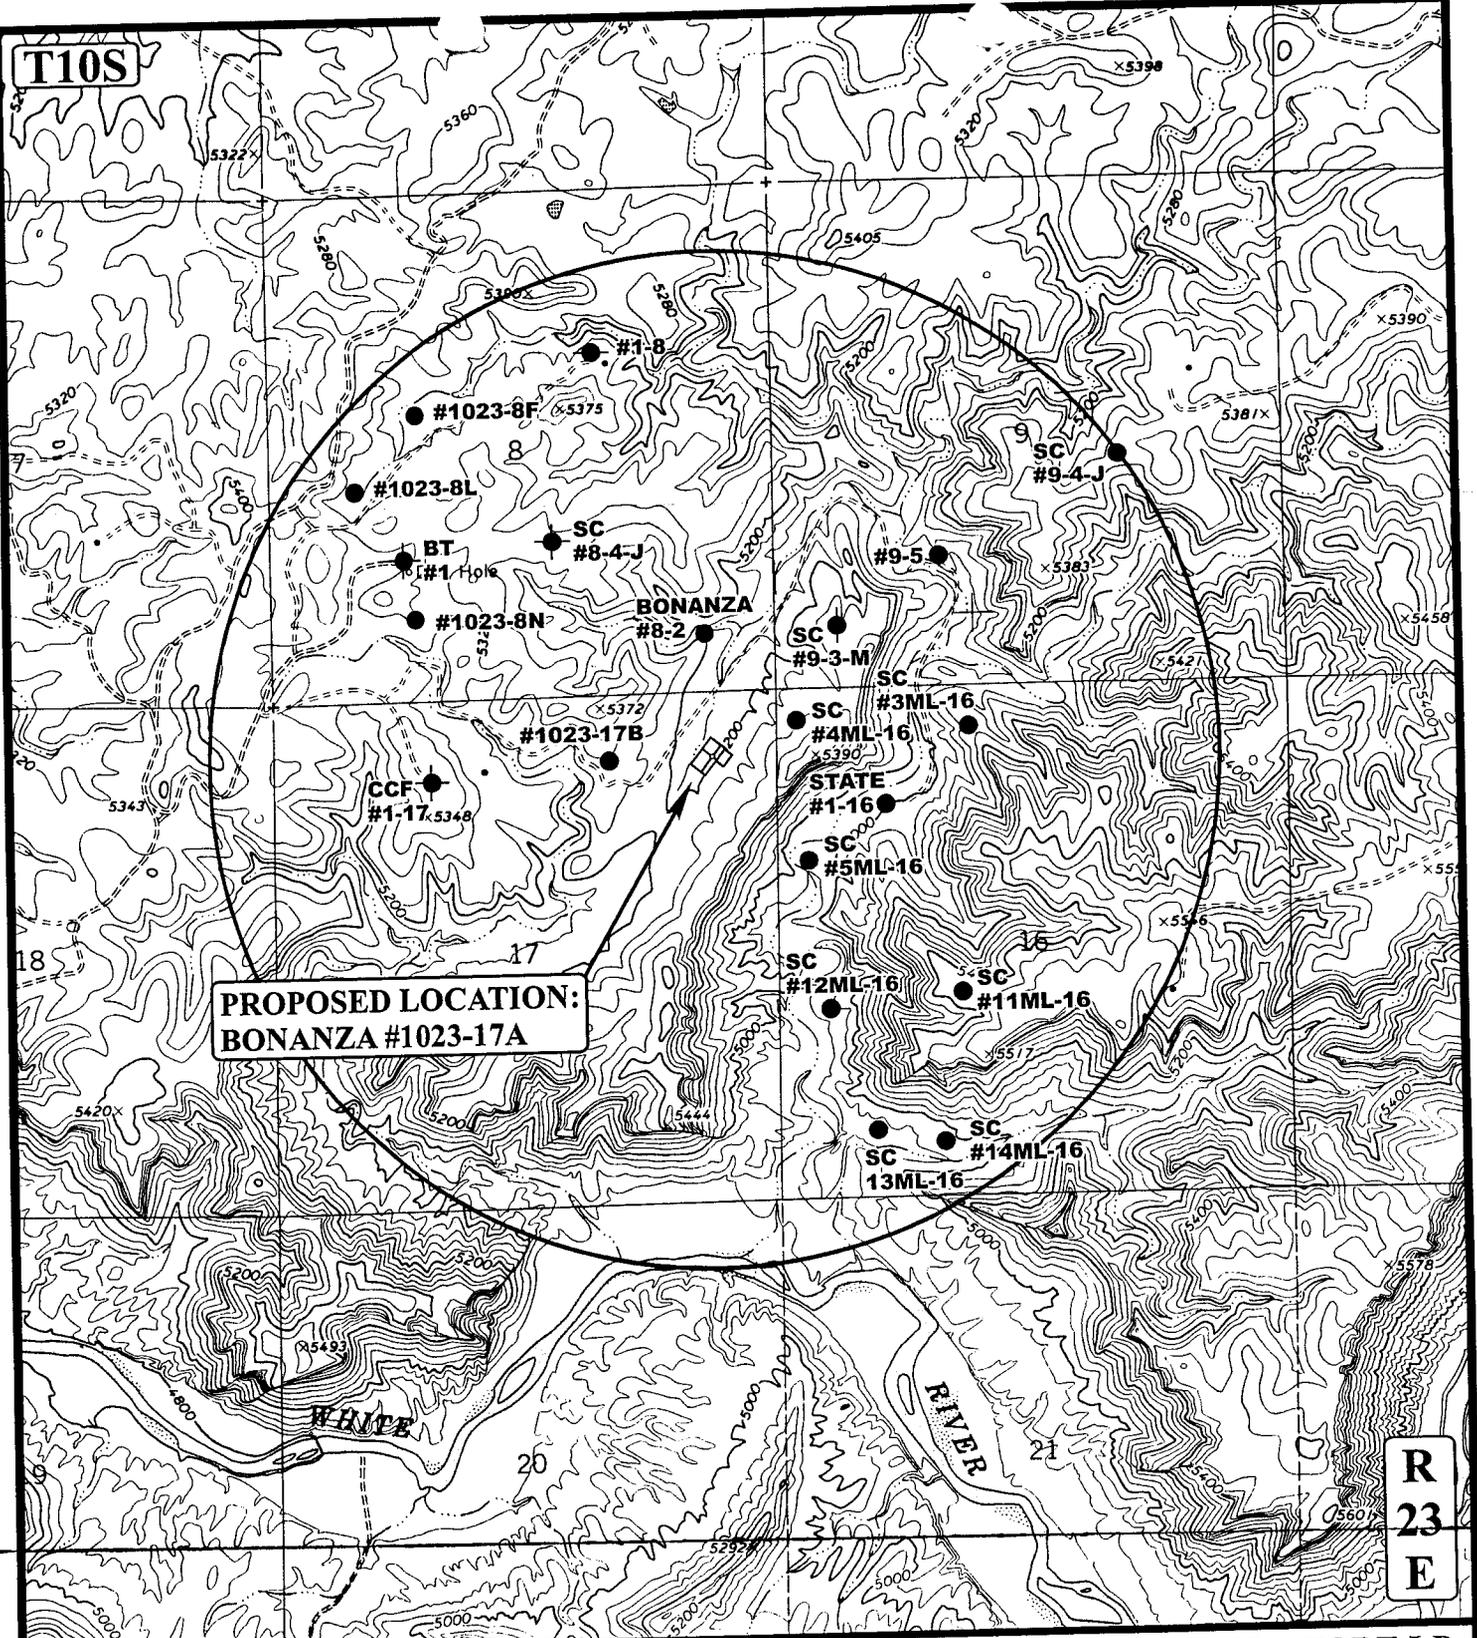

**PROPOSED LOCATION:
BONANZA #1023-17A**

**R
23
E**

LEGEND:

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



KERR-MCGEE OIL & GAS ONSHORE LP

**BONANZA #1023-17A
SECTION 17, T10S, R23E, S.L.B.&M.
682' FNL 675' FEL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC	03	10	06
MAP	MONTH	DAY	YEAR
SCALE: 1" = 2000'	DRAWN BY: LDK		REVISED: 00-00-00



T10S

Drill Hole

TIE-IN POINT

PROPOSED PIPELINE

EXISTING PIPELINE




PROPOSED LOCATION:
BONANZA #1023-17A

PROPOSED ACCESS ROAD

R
23
E

APPROXIMATE TOTAL PIPELINE DISTANCE = 100' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE
-  PROPOSED PIPELINE (SERVICING OTHER WELLS)



KERR-MCGEE OIL & GAS ONSHORE LP

BONANZA #1023-17A
SECTION 17, T10S, R23E, S.L.B.&M.
682' FNL 675' FEL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 03 10 06
MAP MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: LDK REVISED: 00-00-00



KERR-MCGEE OIL & GAS ONSHORE LP
BONANZA #1023-17A
 PIPELINE ALIGNMENT
 LOCATED IN UINTAH COUNTY, UTAH
 SECTION 17, T10S, R23E, S.L.B.&M.

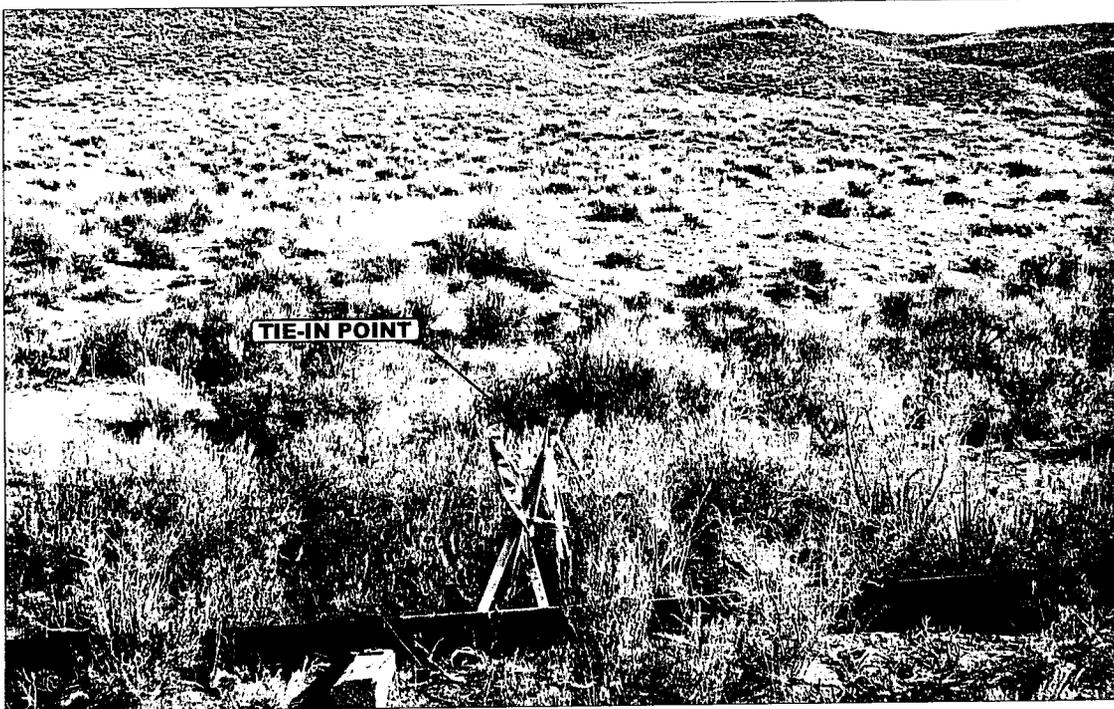


PHOTO: VIEW OF TIE-IN POINT

CAMERA ANGLE: SOUTHEASTERLY

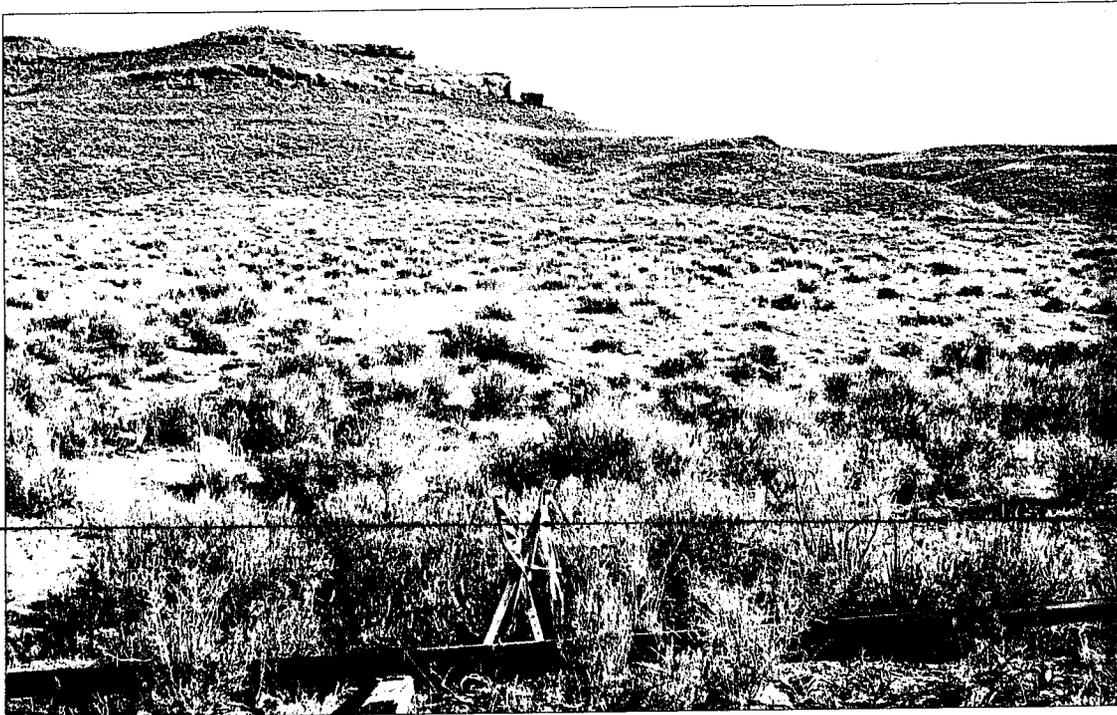


PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: SOUTHEASTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS	03	10	06	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: J.R.	DRAWN BY: LDK	REVISED: 00-00-00		

LOCATION LAYOUT FOR

BONANZA #1023-17A

SECTION 17, T10S, R23E, S.L.B.&M.


682' FNL 675' FEL

C-3.5' El. 194.6'

Proposed Access Road

Approx. Toe of Fill Slope

F-6.7' El. 184.4'

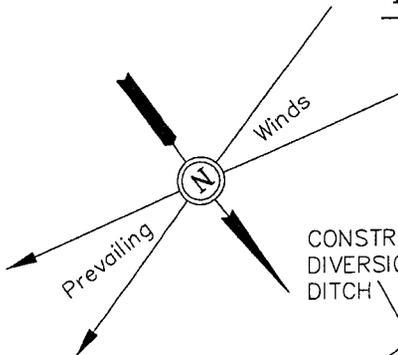

CONSTRUCT DIVERSION DITCH

SCALE: 1" = 50'
DATE: 03-07-06
Drawn By: C.H.


NOTE:
Flare Pit is to be located a min. of 100' from the Well Head.

Approx. Top of Cut Slope

Sta. 3+50

F-1.2' El. 189.9'

Existing Drainage



Existing Drainage

Reserve Pit Backfill & Spoils Stockpile

PIPE TUBS

PIPE RACKS

FLARE PIT

C-6.2' El. 197.3'

C-1.5' El. 192.6'

F-9.3' El. 181.8'

El. 205.4'
C-24.3' (btm. pit)

Block Line

135' Sta. 1+50



RESERVE PITS (10' Deep)

Existing Drainage

Total Pit Capacity W/2' of Freeboard = 15,490 Bbls. ±
Total Pit Volume = 4,280 Cu. Yds.

15' WIDE BENCH

C-5.7' El. 196.8'

RIG

TOILET

TRAILER

Existing Drainage

LIGHT PLANT

BOILER

COMPRESSOR

BOOSTER

WATER TANK

TRASH

Sta. 0+50

C-6.1' El. 197.2'

PROPANE STORAGE

Round Corners as Needed

F-0.3' El. 190.8'

Sta. 0+00

El. 205.7'
C-24.6' (btm. pit)

CONSTRUCT DIVERSION DITCH

F-11.2' El. 179.9'

NOTES:

Reserve Pit Backfill & Spoils Stockpile

Elev. Ungraded Ground At Loc. Stake = 5192.6'
FINISHED GRADE ELEV. AT LOC. STAKE = 5191.1'



Kerr-McGee Oil & Gas Onshore

FIGURE #2

TYPICAL CROSS SECTIONS FOR
 BONANZA #1023-17A
 SECTION 17, T10S, R23E, S.L.B.&M.
 682' FNL 675' FEL

1" = 20'
 X-Section Scale
 1" = 50'

DATE: 03-07-06
 Drawn By: C.H.

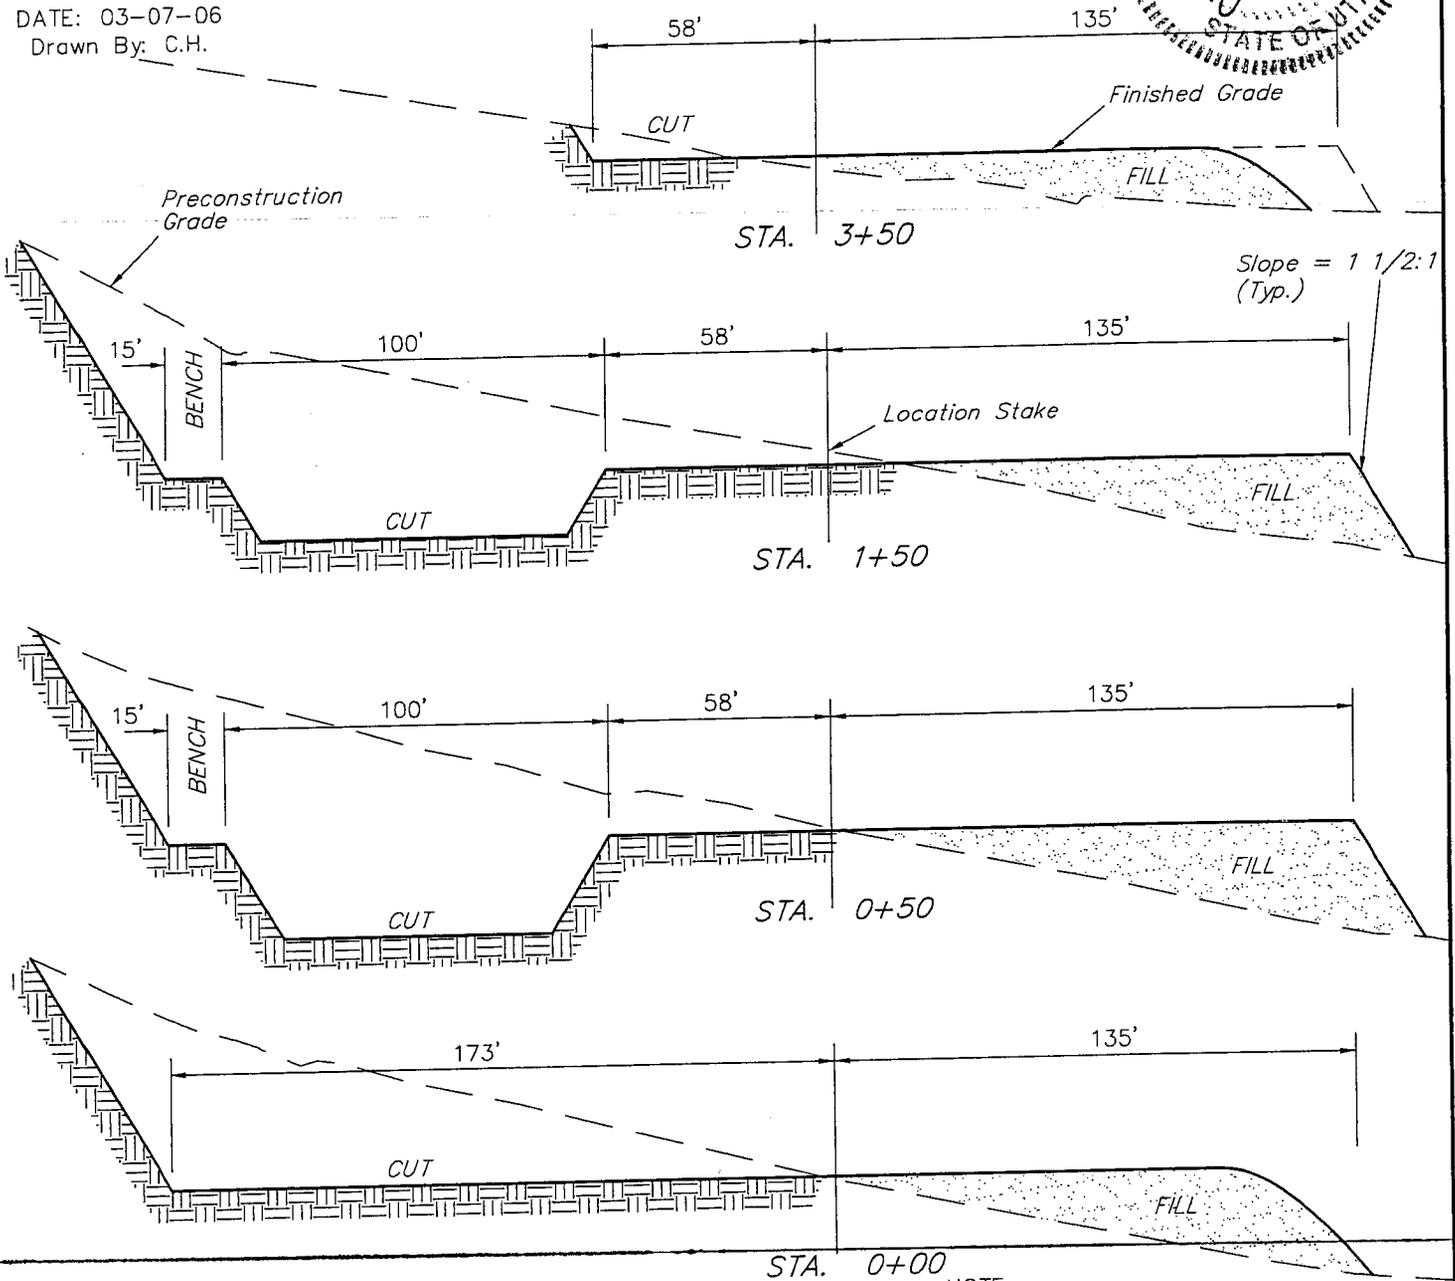

* NOTE:
 FILL QUANTITY INCLUDES
 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 2,120 Cu. Yds.
Remaining Location	= 16,760 Cu. Yds.
TOTAL CUT	= 18,880 CU.YDS.
FILL	= 10,870 CU.YDS.

NOTE:
 Topsoil should not be
 Stripped Below Finished
 Grade on Substructure Area.

EXCESS MATERIAL	= 8,010 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4,260 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 3,750 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East * Vernal, Utah. 84078 * (435) 789-1017

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 06/05/2006

API NO. ASSIGNED: 43-047-38239

WELL NAME: BONANZA 1023-17A
 OPERATOR: KERR-MCGEE OIL & GAS (N2995)
 CONTACT: SHEILA UPCHEGO

PHONE NUMBER: 435-781-7024

PROPOSED LOCATION:

NENE 17 100S 230E
 SURFACE: 0682 FNL 0675 FEL
 BOTTOM: 0682 FNL 0675 FEL
 COUNTY: UINTAH
 LATITUDE: 39.95428 LONGITUDE: -109.3431
 UTM SURF EASTINGS: 641535 NORTHINGS: 4423788
 FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU-37355
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: WSMVD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:


- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. 2971100-2533)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit: _____
- R649-3-2. General
Siting: 460' From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 174-12
Eff Date: 7-5-06
Siting: 400' fr cent ubdr, 8400' fr over wells.
- R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: 1- Federal Approval

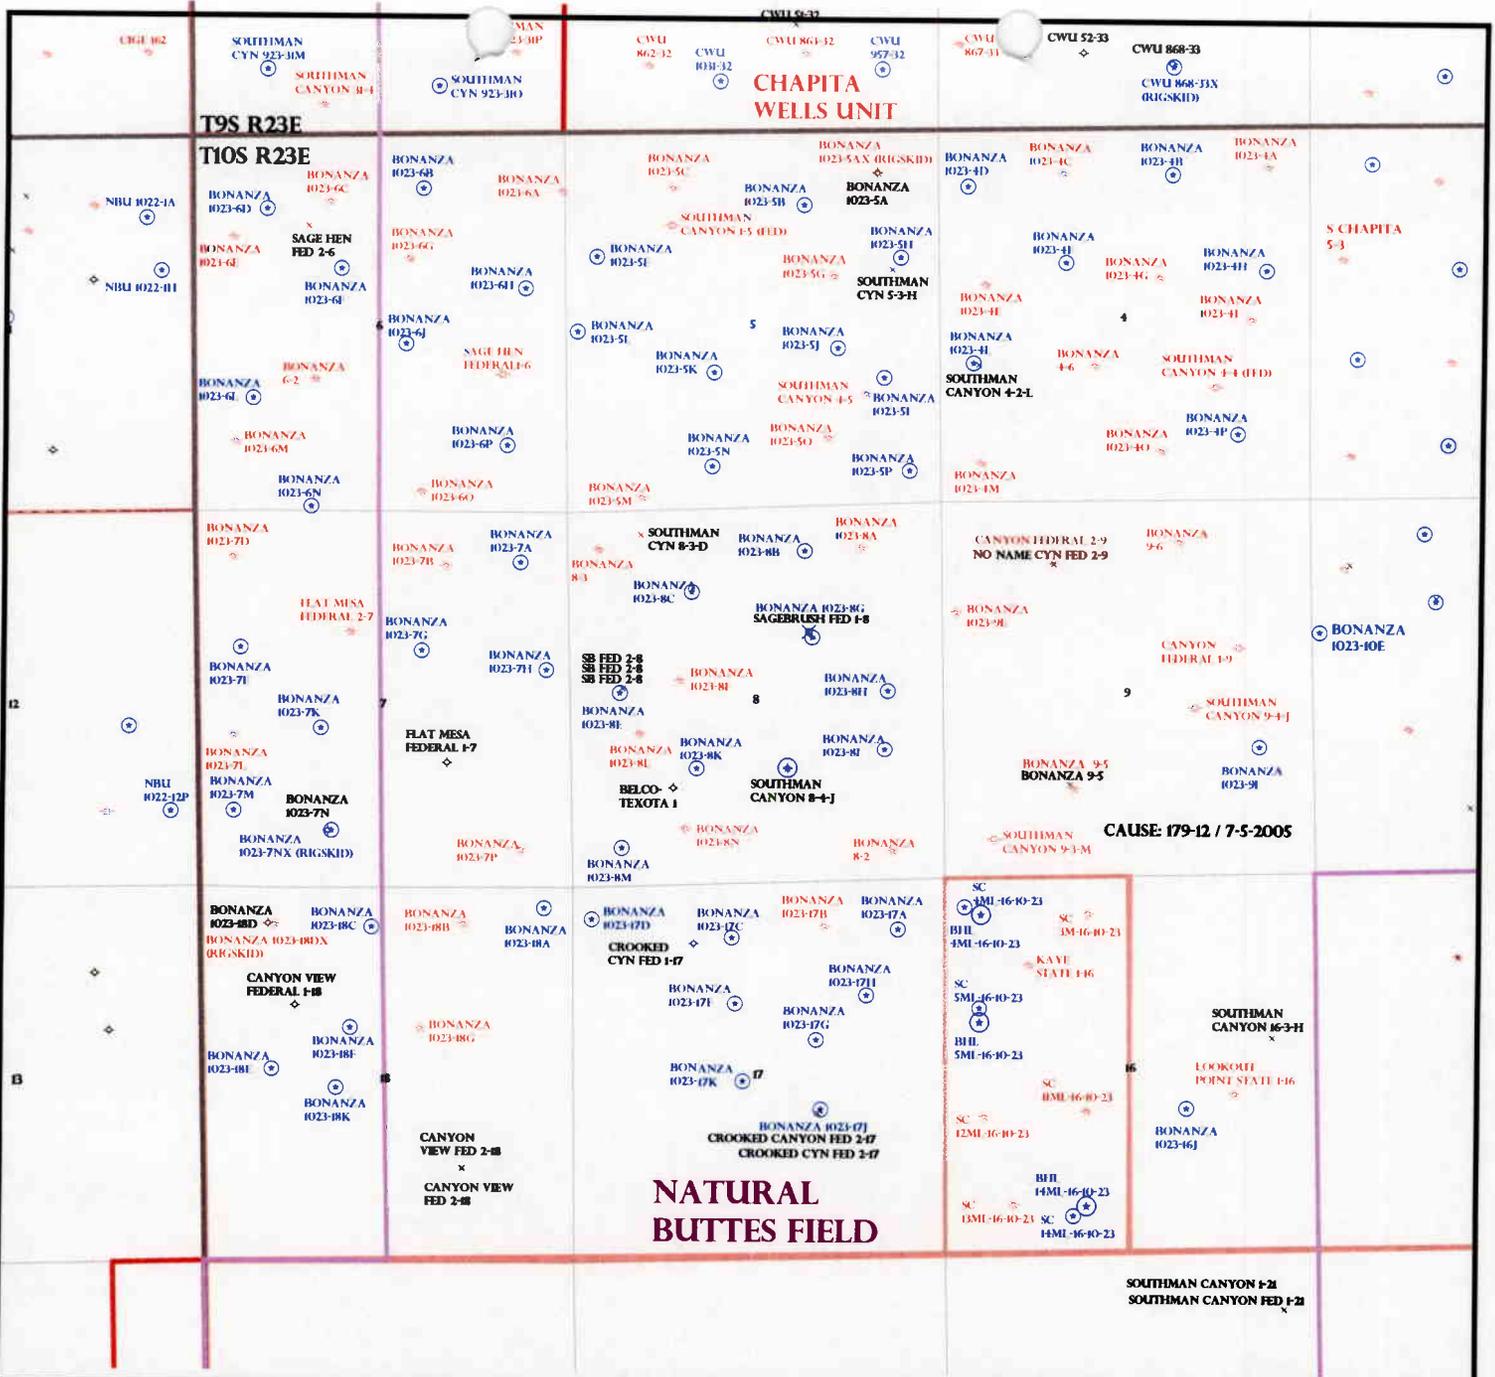

OPERATOR: KERR MCGEE O&G (N2995)

SEC: 4,5,8,9,17,18 T. 10S R. 23E

FIELD: NATURAL BUTTES (630)


COUNTY: UINTAH

CAUSE: 179-12 / 7-5-2005

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- ⊗ GAS INJECTION
 - ⊗ GAS STORAGE
 - ⊗ LOCATION ABANDONED
 - ⊗ NEW LOCATION
 - ⊗ PLUGGED & ABANDONED
 - ⊗ PRODUCING GAS
 - ⊗ PRODUCING OIL
 - ⊗ SHUT-IN GAS
 - ⊗ SHUT-IN OIL
 - ⊗ TEMP. ABANDONED
 - ⊗ TEST WELL
 - ⊗ WATER INJECTION
 - ⊗ WATER SUPPLY
 - ⊗ WATER DISPOSAL
 - ⊗ DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY
DATE: 14-JUNE-2006



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

June 15, 2006

Kerr-McGee Oil & Gas Onshore LP
1368 S 1200 E
Vernal, UT 84078

Re: Bonanza 1023-17A Well, 682' FNL, 675' FEL, NE NE, Sec. 17, T. 10 South,
R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-38239.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Kerr-McGee Oil & Gas Onshore LP

Well Name & Number Bonanza 1023-17A

API Number: 43-047-38239

Lease: UTU-37355

Location: NE NE Sec. 17 T. 10 South R. 23 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

RECEIVED

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

JUN 01 2006

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No. UTU-37355	
6. If Indian, Allottee or Tribe Name	
7. If Unit or CA Agreement, Name and No.	
8. Lease Name and Well No. BONANZA 1023-17A	
9. API Well No. 43-047-38239	
10. Field and Pool, or Exploratory NATURAL BUTTES	
11. Sec., T., R., M., or Blk, and Survey or Area SECTION 17, T10S, R23E	
12. County or Parish UINTAH	13. State UTAH
14. Distance in miles and direction from nearest town or post office* 27.5 MILES SOUTHEAST OF OURAY, UTAH	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 675'	16. No. of Acres in lease 1920.00
17. Spacing Unit dedicated to this well 40.00	18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. REFER TO TOPO C
19. Proposed Depth 7800'	20. BLM/BIA Bond No. on file BOND NO. 2971100-2533
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5193'GL	22. Approximate date work will start*
23. Estimated duration	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature 	Name (Printed/Typed) SHEILA UPCHEGO	Date 5/31/2006
Title REGULATORY ANALYST		
Approved by (Signature) 	Name (Printed/Typed) JERRY KEVORKA	Date 2-15-2007
Title Assistant Field Manager Lands & Mineral Resources	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached. **CONDITIONS OF APPROVAL ATTACHED**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

NOTICE OF APPROVAL

RECEIVED

FEB 21 2007

DIV. OF OIL, GAS & MINING

06BM1349A

UDOGH



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East VERNAL, UT 84078 (435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Kerr-McGee O&G Onshore, LP **Location:** NENE, Sec 17, T10S, R23E
Well No: Bonanza 1023-17A **Lease No:** UTU-37355
API No: 43-047-38239 **Agreement:** N/A

Petroleum Engineer:	Ryan Angus	Office: 435-781-4430	Cell: 435-828-
Petroleum Engineer:	James Ashley	Office: 435-781-4470	Cell: 435-828-7874
Petroleum Engineer:	Matt Baker	Office: 435-781-4490	Cell: 435-828-4470
Petroleum Engineer:	Michael Lee	Office: 435-781-4432	
Supervisory Petroleum Technician:	Jamie Sparger	Office: 435-781-4502	Cell: 435-828-3913
NRS/Environmental Scientist:	Scott Ackerman	Office: 435-781-4437	
NRS/Environmental Scientist:	Paul Buhler	Office: 435-781-4475	Cell: 435-828-4029
NRS/Environmental Scientist:	Jannice Cutler	Office: 435-781-3400	
NRS/Environmental Scientist:	Michael Cutler	Office: 435-781-3401	
NRS/Environmental Scientist:	Anna Figueroa	Office: 435-781-3407	
NRS/Environmental Scientist:	Melissa Hawk	Office: 435-781-4476	
NRS/Environmental Scientist:	Chuck Macdonald	Office: 435-781-4441	
NRS/Environmental Scientist:	Nathan Packer	Office: 435-781-3405	
NRS/Environmental Scientist:	Verlyn Pindell	Office: 435-781-3402	
NRS/Environmental Scientist:	Holly Villa	Office: 435-781-4404	
NRS/Environmental Scientist:	Darren Williams	Office: 435-781-4447	
NRS/Environmental Scientist:	Karl Wright	Office: 435-781-4484	
After Hours Contact Number:	435-781-4513	Fax: 435-781-4410	

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a one-year period. An additional year extension may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

- Location Construction (Notify NRS) - Forty-Eight (48) hours prior to construction of location and access roads.
- Location Completion (Notify NRS) - Prior to moving on the drilling rig.
- Spud Notice (Notify Petroleum Engineer) - Twenty-Four (24) hours prior to spudding the well.
- Casing String & Cementing (Notify Supervisory Petroleum Technician) - Twenty-Four (24) hours prior to running casing and cementing all casing
- BOP & Related Equipment Tests (Notify Supervisory Petroleum Technician) - Twenty-Four (24) hours prior to initiating pressure tests.
- First Production Notice (Notify Petroleum Engineer) - Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

1. If paleontologic materials are uncovered during construction, the operator shall immediately stop work that might further disturb such materials and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation will be necessary for the discovered paleontologic material.
2. The topsoil from the reserve pit shall be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be re-contoured and the topsoil re-spread, and the area shall be seeded in the same manner as the location topsoil.
3. Once the location is plugged and abandoned, it shall be re-contoured to natural contours, topsoil re-spread where appropriate, and the entire location seeded with the recommended seed mix. Seeding shall take place by broadcasting the seed and walking it into the soil with a dozer immediately after the dirt work is completed.
4. The lessee/operator is given notice that lands on the lease have a stipulation. It is requested that the lessee/operator not initiate surface disturbing activities or drilling from May 15 through July

DOWNHOLE CONDITIONS OF APPROVAL

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

1. The top of the production casing cement shall extend a minimum of 200 feet above the surface casing shoe.
2. A Cement Bond Log (CBL) shall be run in the production casing from the TD to the top of cement. A field copy of the CBL shall be submitted to the BLM Vernal Field Office for review.

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

1. There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
2. The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
3. **Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.**
4. Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.

All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.

BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.

Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.

No aggressive/fresh hard-banded drill pipe shall be used within casing.

5. The lessee/operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled and analyzed (a copy of the analyses to be submitted to the BLM Field Office in Vernal, Utah).

6. All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
7. The lessee/operator must report encounters of all non oil & gas mineral resources (such as gilsonite, tar sands, oil shale, etc.) to a geologist of the Vernal Field Office in writing within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
8. No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office shall be obtained and notification given before resumption of operations.
9. Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.

Any change in the program shall be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) shall be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.

In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.

10. Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

A cement bond log (CBL) will be run from the production casing shoe to the surface casing shoe and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Wellogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.

11. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease shall have prior written approval from the BLM, Vernal Field Office.

All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.

12. Oil and gas meters shall be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.
13. A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
14. This APD is approved subject to the requirement that, should the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - a. Operator name, address, and telephone number.
 - b. Well name and number.
 - c. Well location (1/4, Sec., Twn, Rng, and P.M.).
 - d. Date well was placed in a producing status (date of first production for which royalty will be paid).
 - e. The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - f. The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.

- g. Unit agreement and / or participating area name and number, if applicable.
 - h. Communitization agreement number, if applicable.
15. Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.
 16. All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production
 17. Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
 18. Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-37355

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
BONANZA 1023-17A

9. API Well No.
4304738239

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR MCGEE OIL AND GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
(435)781-7003

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**682' FNL, 675' FEL
NENE, SEC 17-T10S-R23E**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other APD EXTENSION
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	DOG M
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON JUNE 15, 2006.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 05-30-07
By: [Signature]

COPY SENT TO OPERATOR
Date: 3-21-07
Initials: dm

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) RAMEY HOOPES	Title REGULATORY CLERK
Signature <u>[Signature]</u>	Date May 23, 2007

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

MAY 29 2007

DIV OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304738239
Well Name: BONANZA 1023-17A
Location: NENE, SEC 17-T10S-R23E
Company Permit Issued to: KERR-MCGEE OIL AND GAS ONSHORE LP
Date Original Permit Issued: 6/15/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Ramey Hoopes
Signature

5/23/2007

Date

Title: REGULATORY CLERK

Representing: KERR-MCGEE OIL AND GAS ONSHORE L

RECEIVED

MAY 29 2007

DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

June 12, 2007

Raleen White
Kerr McGee O&G Onshore LP
1999 Broadway, Suite 3700
Denver, CO 80202

Re: APDs Rescinded at the request of Kerr McGee O&G Onshore LP.

Dear Ms. White:

Enclosed find the list of APDs that you requested to be rescinded to Kerr McGee O&G Onshore LP. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective June 11, 2007.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject locations.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

Page 2
June 12, 2007
Subject:

Bonanza 1023-12B

Bonanza 1023-1N

Bonanza 1023-1O

Bonanza 1023-11A

Bonanza 1023-11H

Bonanza 1023-14F

Bonanza 1023-15O

Bonanza 1023-15E

Bonanza 1023-17A

Bonanza 1023-17H

Bonanza 1023-17G

Bonanza 1023-17K

Bonanza 1023-17F

Bonanza 1023-17D

Bonanza 1023-18J