

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL				5. MINERAL LEASE NO: UTU 76042	6. SURFACE: Federal
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>				8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: EOG RESOURCES, INC.				9. WELL NAME and NUMBER: HOSS 52-29	
3. ADDRESS OF OPERATOR: P.O. BOX 1815 CITY VERNAL STATE UT ZIP 84078			PHONE NUMBER: (435) 789-0790	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES <i>Undesignated</i>	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 815 FNL 812 FWL (NWNW) 40.098711 LAT 109.357494 LON AT PROPOSED PRODUCING ZONE: SAME				11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWNW 29 8S 23E S - 109.356818	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 39.8 MILES SOUTH OF VERNAL, UTAH				12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 660		16. NUMBER OF ACRES IN LEASE: 1880		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 175		19. PROPOSED DEPTH: 10,115		20. BOND DESCRIPTION: NM 2308	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 4912 GL		22. APPROXIMATE DATE WORK WILL START:		23. ESTIMATED DURATION: 45 DAYS	

24. **PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT
17-1/2	13-3/8 H-40 48#	45	SEE ATTACHED EIGHT POINT PLAN
12-1/4	9-5/8 J-55 36#	2,300	SEE ATTACHED EIGHT POINT PLAN
7-7/8	4-1/2 P-110 11.6#	TD	SEE ATTACHED EIGHT POINT PLAN

25. **ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:


<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER

NAME (PLEASE PRINT) Kaylene R. Gardner TITLE Sr. Regulatory Assistant
 SIGNATURE  DATE 12/1/2006

(This space for State use only)
 API NUMBER ASSIGNED: 43-047-38900

**Approved by the
Utah Division of
Oil, Gas and Mining**
APPROVAL:

**RECEIVED
DEC 05 2006**

(11/2001) **Federal Approval of this Action is Necessary** (See Instructions on Reverse Side)
 Date: 12-20-06
 By: 

DIV. OF OIL, GAS & MINING

T8S, R23E, S.L.B.&M.

EOG RESOURCES, INC.


Well location, HOSS #52-29, located as shown in the NW 1/4 NW 1/4 of Section 29, T8S, R23E, S.L.B.&M., Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.


BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

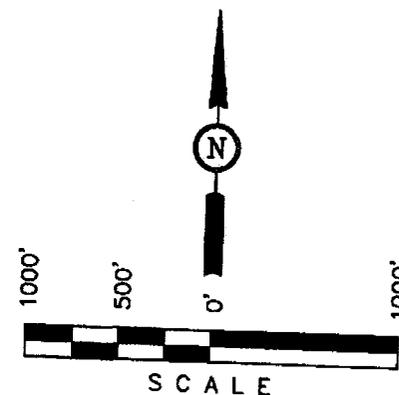


CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE SURVEY WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYING UNDER MY SUPERVISION AND THAT THE SAME IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



UINTAH ENGINEERING & SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 07-17-06	DATE DRAWN: 07-20-06
PARTY J.R. A.A. C.H.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

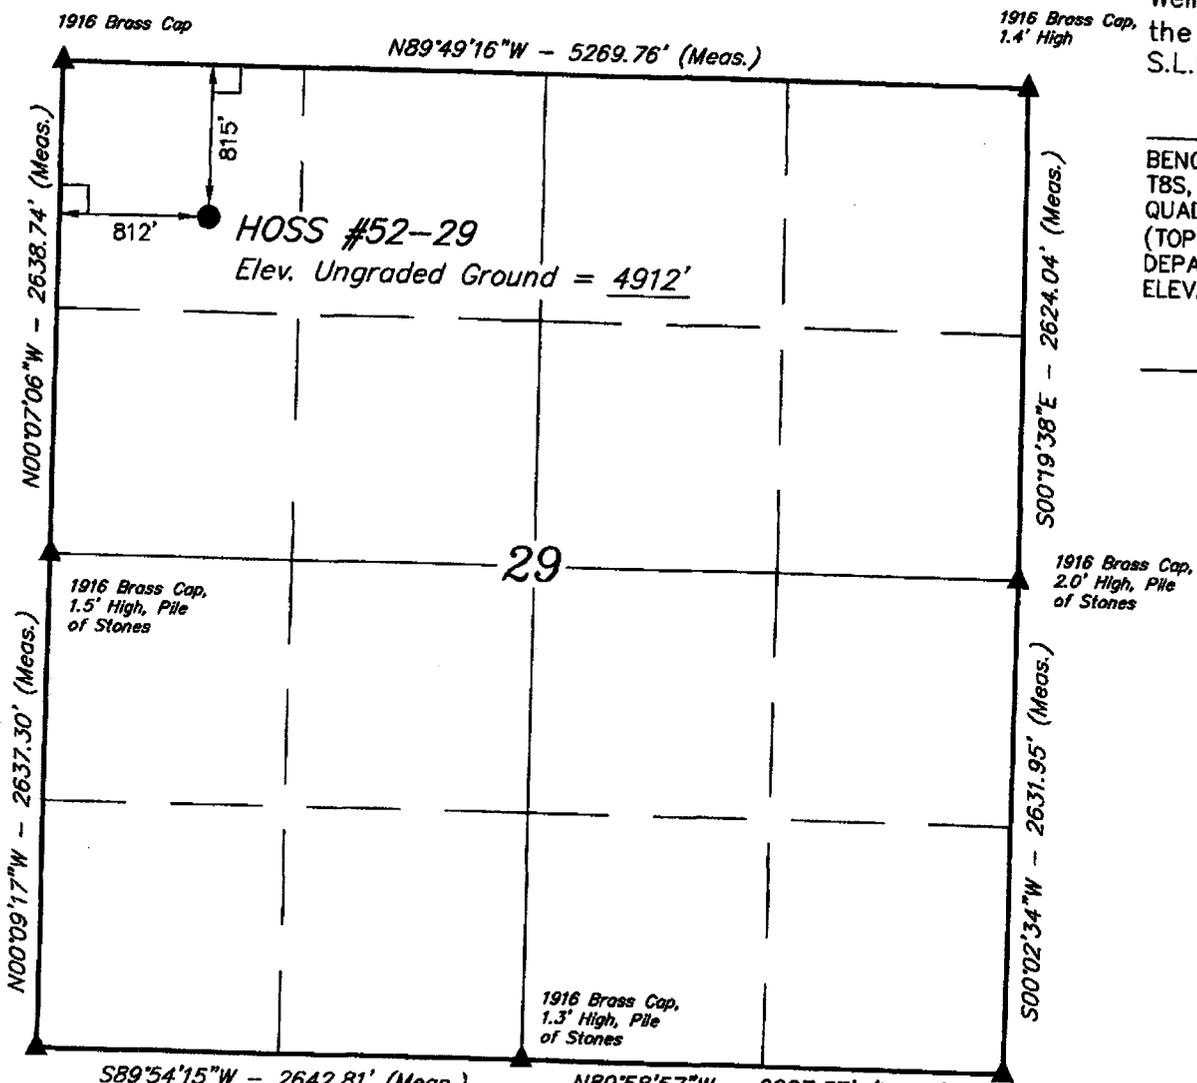

1916 Brass Cap
2.3' High

S89°54'15"W - 2642.81' (Meas.)

N89°58'57"W - 2627.37' (Meas.)

1916 Brass Cap,
2.0' High, Pile
of Stones

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 40°05'55.36" (40.098711)
 LONGITUDE = 109°21'26.98" (109.357494)
 (NAD 27)
 LATITUDE = 40°05'55.49" (40.098747)
 LONGITUDE = 109°21'24.53" (109.356814)

STATE OF UTAH)

) ss

COUNTY OF UINTAH)

VERIFICATION

Kaylene R. Gardner, of lawful age, being first duly sworn upon oath, deposes and says:

She is the Sr. Regulatory Assistant of EOG Resources, Inc., of Vernal, Utah. EOG Resources, Inc. is the operator of the following described well:


HOSS 52-29
815' FNL – 812' FWL (NWNW)
SECTION 29, T8S, R23E
UINTAH COUNTY, UTAH

EOG Resources, Inc., Encana Oil & Gas (USA) Inc, Kerr-McGee Oil & Gas Onshore LP, and Yates Petroleum Corp, Exhibit A are the only owners in the well and/or of all contiguous oil and gas leases or drilling units overlying the pool.

On the 1st day of December 2006 she placed in the United States mail, with postage prepaid, a copy of the attached Application for Commingling in one wellbore for the subject well.


Said envelope which contained these instruments was addressed to the Utah Division of Oil, Gas & Mining, Bureau of Land Management, and Encana Oil & Gas (USA) Inc., Kerr-McGee Oil & Gas Onshore LP, and Yates Petroleum Corp

Further affiant saith not.



Kaylene R. Gardner
Sr. Regulatory Assistant

Subscribed and sworn before me this 1st day of December, 2006.





Notary Public

My Commission Expires: 8/1/2009

Exhibit "A" to Affidavit
Hoss 52-29 Application to Commingle

Kerr-McGee Oil & Gas Onshore LP
1999 Broadway, Suite 3700
Denver, Colorado 80202
Attn: Mr. W. Chris Latimer

Encana Oil & Gas (USA) Inc.
950 17th Street, Suite 2600
Denver, Colorado 80202
Attn: Ms. Diana Weber

Yates Petroleum Corp.
105 S. Fourth St.
Artesia, NM 88210

R 23 E

19

20

823-19P
MULLIGAN DRAW UNIT

UTU-74425

U-0143276



SRU 11-29
HOSS 52-29

T
8
S


30 U-61400

UTU-76042

29

○ HOSS 52-29

■■■■■■■■■■ Mulligan Draw Unit Outline



Geog resources

Denver Division

EXHIBIT "A"

HOSS 52-29
Commingling Application
Uintah County, Utah

Scale: 1" = 1000'	D:\utah\Commingled\ page_Hoss52-29_commingled.dwg Layout1	Author GT	Sep 15, 2006 - 11:04am
----------------------	-----------------------------------------------------------------	--------------	---------------------------

EIGHT POINT PLAN

HOSS 52-29
NW/NW, SEC. 29, T8S, R23E, S.L.B.&M..
UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH (KB)
Green River FM	2,266'
Wasatch	5,291'
Chapita Wells	5,911'
Buck Canyon	6,620'
North Horn	7,182'
KMV Price River	7,743'
KMV Price River Middle	8,506'
KMV Price River Lower	9,459'
Sego	9,914'

Estimated TD: **10,115' or 200'± below Sego top**

Anticipated BHP: 5,525 Psig

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

EOG Resources, Inc. requests authorization for commingling of production from the Wasatch, Mesaverde and Mancos formations in the referenced wellbore. In the event allocation of production is necessary, the allocation will be based on proportionate net pay as calculated from cased hole logs. Production from the Wasatch, Mesaverde and Mancos formations will be commingled in the wellbore and produced through open ended 2-3/8" tubing landed below all perforations in the 4-1/2: production casing.

Attached is a map showing the location of all wells on contiguous oil and gas leases or drilling units and an affidavit showing that this application has been provided to owners of all contiguous oil and gas leases or drilling units overlying the pool.

3. PRESSURE CONTROL EQUIPMENT:

Production Hole – 5000 Psig
BOP schematic diagrams attached.

4. CASING PROGRAM:

	<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>RATING FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
Conductor:	17 1/2"	0' – 45'	13 3/8"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
Surface	12-1/4"	45' – 2,300'KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
Production:	7-7/8"	2,300'± – TD	4-1/2"	11.6#	P-110	LTC	7560 PSI	10,710 Psi	284,000#

EIGHT POINT PLAN

HOSS 52-29 NW/NW, SEC. 29, T8S, R23E, S.L.B.&M.. UINTAH COUNTY, UTAH

Note: 12-1/4" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone. **All casing will be new or inspected.**

5. Float Equipment:

Surface Hole Procedure (0' - 2300'±)

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface. (15 total)

Float Equipment: (Cont'd)

Production Hole Procedure (2300'± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-1/2", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (Surface - 2300'±):

Air/air mist or aerated water.

Production Hole Procedure (2300'± - TD): Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

2300'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

EIGHT POINT PLAN

HOSS 52-29
NW/NW, SEC. 29, T8S, R23E, S.L.B.&M..
UINTAH COUNTY, UTAH

7. VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 2 – Item E: Special Drilling Operations

EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. Due to reduce location excavation, the blooie line will be approximately 75' in length

8. EVALUATION PROGRAM:

Logs: Mud log from base of surface casing to TD.
Cased-hole Logs: Cased-hole logs will be run in lieu of open-hole logs consisting of the following:
Cement Bond / Casing Collar Locator and Pulsed Neutron

9. CEMENT PROGRAM:

Surface Hole Procedure (Surface - 2300'±):

Lead: Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl₂, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft³/sk. yield, 23 gps water.

Tail: Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Top Out: As necessary with Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Note: Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.

Production Hole Procedure (2300'± - TD)

Lead: **170 sks:** Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44 (Salt), 0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29 (cello flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water.

Tail: **940 sks:** 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9 gps water.

EIGHT POINT PLAN

HOSS 52-29
NW/NW, SEC. 29, T8S, R23E, S.L.B.&M.
UINTAH COUNTY, UTAH

Note: The above number of sacks is based on gauge-hole calculation.
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.
Final Cement volumes will be based upon gauge-hole plus 45% excess.

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 2300'±):

Lost circulation

Production Hole (2300'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)



**HOSS 52-29
NWNW, Section 29, T8S, R23E
Uintah County, Utah**

SURFACE USE PLAN

NOTIFICATION REQUIREMENTS

- Location Construction: Forty-eight (48) hours prior to construction of location and access roads.
- Location Completion: Prior to moving on the drilling rig.
- Spud Notice: At least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing: Twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and related Equipment Tests: Twenty-four (24) hours prior to running casing and tests.
- First Production Notice: Within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

EOG Resources, Inc., hereby applies under Section 28 of the Act of February 25, 1920 (41 state. 449), (30 U.S.C. Section 185) as amended by the Act of November 16, 1973, (87 Stat. 576) and requests that this APD serve as the construction, operations and maintenance plan for the right-of-way application for the pipeline on federal lands. A 30-year right-of-way term is requested.

The requested pipeline right-of-way on Federal acreage necessary is approximately 450' with a 40' temporary right-of-way disturbing approximately 0.41 acres and a 20' permanent right-of-way disturbing approximately 0.21 acres within Federal Lease UTU 61400. (see attached survey plats and maps).

The well pad is approximately 325 feet long with a 246-foot width, containing 1.84 acres more or less. The well access road is approximately 792 feet long with a 30-foot right-of-way, disturbing approximately 0.55 acre. New surface disturbance associated with access road and the well pad is estimated to be approximately 2.39 acres. The pipeline is approximately 1710 feet long with a 20-foot permanent right-of-way within Federal Lease UTU-76042 and 450 feet long with a 20 foot permanent right-of-way within Federal Lease UTU 61400 disturbing approximately 0.99 acres.

1. EXISTING ROADS:

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 39.8 miles south of Vernal, Utah – See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary.

2. PLANNED ACCESS ROAD:

- A. The access road will be approximately 792' in length.
- B. The access road has a 30 foot ROW w/18 foot running surface.
- C. Maximum grade of the new access road will be 8 percent.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

- I. No permanent road right-of-way on Federal acreage is required.

All travel will be confined to existing access road right-of-way.

New or reconstructed roads will be centerlined – flagged at time of location staking.

The road shall be constructed/upgraded to meet the standards to the anticipated traffic flow and all-weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well constructed safe road. Prior to upgrading the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation or debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Third Edition, and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction. During the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and drainage ditches and culverts will be kept clear and free flowing.

3. LOCATION OF EXISTING WELLS WITHIN A ONE-MILE RADIUS:

See attached TOPO map "C" for the location of wells within a one-mile radius.

4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:

A. On Well Pad

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, two (2) 400 BBL vertical tanks and attaching piping.
2. Gas gathering lines – A 4" gathering line will be buried from dehy to the edge of the location.
3. The north side of the location from corner 2 to 8 shall be rip-rapped to protect it from erosion.

B. Off Well Pad

1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
2. The length of the new proposed pipeline is 2160' x 40'. The proposed pipeline leaves the northern edge of the well pad (Lease UTU 76042) proceeding in a southerly direction for an approximate distance of 1710' to Section 30, T8S, R23E proceeding an addition 450' tying into an existing pipeline located in the SENE of Section 30, T8S, R23E (Lease UTU-61400). Pipe will be 4" NOM, 0.156 wall, Grade X42, Zap-Lok, electric weld with a 35 mil X-Tru coating.
3. Proposed pipeline will be a 4" OD steel, Zap-Lok line laid on the surface
4. Protective measures and devices for livestock and wildlife will be taken and /or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. **All existing facilities will be painted with Carlsbad Canyon.** Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

5. LOCATION AND TYPE OF WATER SUPPLY:

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/ or Target Trucking Inc.'s water source in the SW/SW. Sec 35, T9S, R22E Uintah County, Utah (State Water Right # 49-1501, and/or Bonanza Power Plant water source in Sec 26, T8S, R23E Uintah County, UT (State Water Right # 49-225(A31368)). Water will be hauled by a licensed trucking company.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIALS:

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL:

A. METHODS AND LOCATION

1. Cuttings will be confined in the reserve pit.
 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following three locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or by removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with felt and a 12 millimeter plastic liner.

EOG Resources, Inc. maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances which are used during the course of construction, drilling, completion, and production operations for this project. Hazardous materials (substances) which may be found at the site may include drilling mud and cementing products which are primarily inhalation hazards, fuels (flammable and/or combustible), materials that may be necessary for well completion/ stimulation activities such as flammable or combustible substances and acids/gels (corrosives). The opportunity for Superfund Amendments and Reauthorization Act (SARA) listed Extremely Hazardous Substances (EHS) at the site is generally limited to proprietary treating chemicals. All hazardous and EHS and commercial preparations will be handled in an appropriate manner to minimize the potential for leaks or spills to the environment.

8. ANCILLARY FACILITIES:

None anticipated.

9. WELL SITE LAYOUT:

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the west corner of the location. The flare pit will be located downwind of the prevailing wind direction on the west side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil will be stored separate from the location topsoil east of corner #5. The stockpiled location topsoil will be stored between corners #5 and #6 and corners #2 and #3. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture from this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the east.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.)
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distances between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard

with an adjacent 16 foot gate shall be installed in any fence where a road is regularly traveled. If the well is a producer, the cattleguards (*shall/shall not*) be permanently counted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will

in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RECLAMATION OF THE SURFACE:

A. Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

Seed Mixture	Drilled Rate (lbs./acre PLS*)
Crested Wheatgrass	6.0
Needle and Threadgrass	6.0

*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

B. Dry Hole/Abandoned Location

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriated surface rehabilitation conditions of approval.

Seed Mixture	Drilled Rate (lbs./acre PLS*)
Fourwing saltbush	3.0
Indian ricegrass	2.0
Crested Wheatgrass	2.0
Needle and Threadgrass	2.0
Scarlet globe mallow	1.0

*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

11. SURFACE OWNERSHIP:

Surface ownership of the proposed well site, access road, and pipeline route is as follows:

Bureau of Land Management

12. OTHER INFORMATION:

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the Authorized Officer. Within five working days the Authorized Officer will inform the operator as to:

- Whether the materials appear eligible for the National Register of Historic Places;
- The mitigation measures the operator will likely have to undertake before the site can be used.
- A time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will

be obtained from the BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application or herbicides or other pesticides or possible hazardous chemicals.

- C. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.
- D. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice of Lessees. The operator is fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" and "Right-of-Way grant", if applicable, will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Construction activity will not be conducted using frozen or saturated soils material or during periods when watershed damage is likely to occur.

If the existing access road, proposed access road, and proposed pad are dry during construction, drilling, and completion activities, water will be applied to help facilitate compaction during construction and to minimize soil loss as a result of wind erosion.

A cultural resources survey was conducted and submitted 8/20/2006 by Montgomery Archaeological Consultants. A Paleontology survey was conducted and submitted 8/17/2006 by Dr. Wade Miller.

Additional Surface Stipulations:

No construction or drilling will be allowed during the Antelope kidding season of May 15th to June 20th unless clearance has been obtained by the BLM wildlife biologist.

Prior to any construction between March 1 and July 15, all areas within 0.15 mile of the proposed location shall be surveyed for ferruginous hawk nests. If active nests are identified, no surface disturbance will occur until the nest has been inactive for a two-year period. If no nests are found within 0.5 mile of the proposed location, construction drilling can occur.

LESSEE OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

PERMITTING AGENT

Kaylene R. Gardner
EOG Resources, Inc.
P.O. Box 1815
Vernal, Ut 84078
(435) 781-9111

DRILLING OPERATIONS

Donald Presenkowski
EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113
307-276-4865

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Please be advised that EOG Resources, Inc. is considered to be the operator of the Hoss 52-29 well, located in NWNW, of Section 29, T8S, R23E, Uintah County, Utah; Federal land and minerals; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is under Bond # NM 2308.

October 18, 2006
Date



Kaylene R. Gardner, Sr. Regulatory Assistant

Request for Exception to Buried Pipeline Requirement
HOSS 52-29
NWNW, Sec. 29, T8S, R23E
UTU-76042

EOG Resources, Inc. requests a variance to the requirement for a buried gas sales pipeline for the referenced well for the following reasons:

1. In order to bury pipe on the gas sales line route, additional surface disturbance relative to surface pipeline would be approximately *50' X Length* acres.
2. Ripping, cutting, or blasting of rock would be required, which in turn would leave long-term spoils on the right-of-way.
3. The disturbed soils on the pipeline corridor would be difficult to rehabilitate and would be susceptible to noxious weed infestation, which in turn would be hazardous to livestock.
4. Supplemental soil to replace removed rock would need to be hauled in from other locations to provide bedding and cover material.
5. The buried pipe would need to be coated and/or wrapped to minimize the potential for corrosion-caused gas leaks and blowouts.
6. Burying of pipe next to access roads increases the potential for damage, explosion, and fire when using graders and/or dozers for snow removal or road rehabilitation.
7. Surface equipment, including risers with blow down valves and pipeline markers will be required, adding to negative visual impact.
8. Disturbance of previously rehabilitated pipeline corridor could be necessary if increasing well density requires crossing of the corridor or location construction on the corridor.
9. Pipeline corridors subject to poor rehabilitation characteristics are susceptible to high rates of soil erosion.
10. Buried shallow pipelines in low areas subject to the occasional presence of standing water are susceptible to movement and surfacing.

EOG RESOURCES, INC.
HOSS #52-29
SECTION 29, T8S, R23E, S.L.B.&M.

PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 3.9 MILES TO THE JUNCTION OF STATE HIGHWAY 45; EXIT RIGHT AND PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 24.1 MILES ON STATE HIGHWAY 45 TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY, THEN WESTERLY DIRECTION APPROXIMATELY 9.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN RIGHT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 2.0 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 200' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 39.8 MILES.

EOG RESOURCES, INC.

HOSS #52-29

LOCATED IN UINTAH COUNTY, UTAH
SECTION 29, T8S, R23E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHWESTERLY



Since 1964

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

07 19 06
MONTH DAY YEAR

PHOTO

TAKEN BY: J.R.

DRAWN BY: C.P.

REVISED: 00-00-00

EOG RESOURCES, INC.


FIGURE #2

TYPICAL CROSS SECTIONS FOR



HOSS #52-29

SECTION 29, T8S, R23E, S.L.B.&M.

815' FNL 812' FWL



DATE: 07-20-06
Drawn By: C.H.

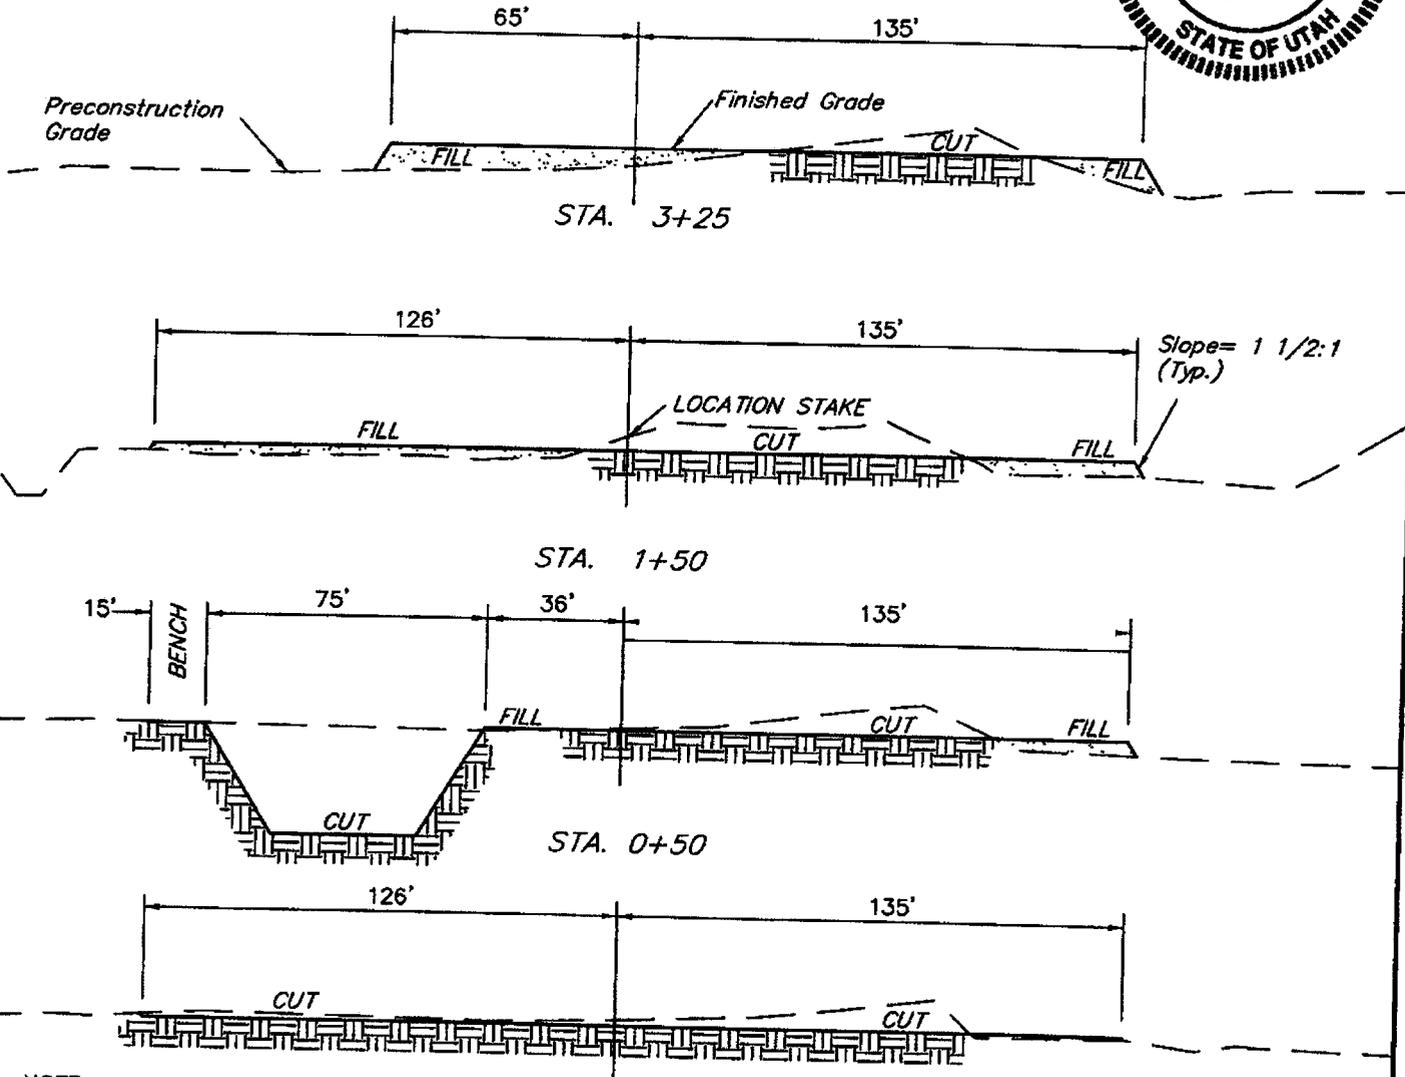

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

* NOTE:


FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,530 Cu. Yds.
Remaining Location	= 4,390 Cu. Yds.
TOTAL CUT	= 5,920 CU.YDS.
FILL	= 2,720 CU.YDS.

EXCESS MATERIAL	= 3,200 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,200 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

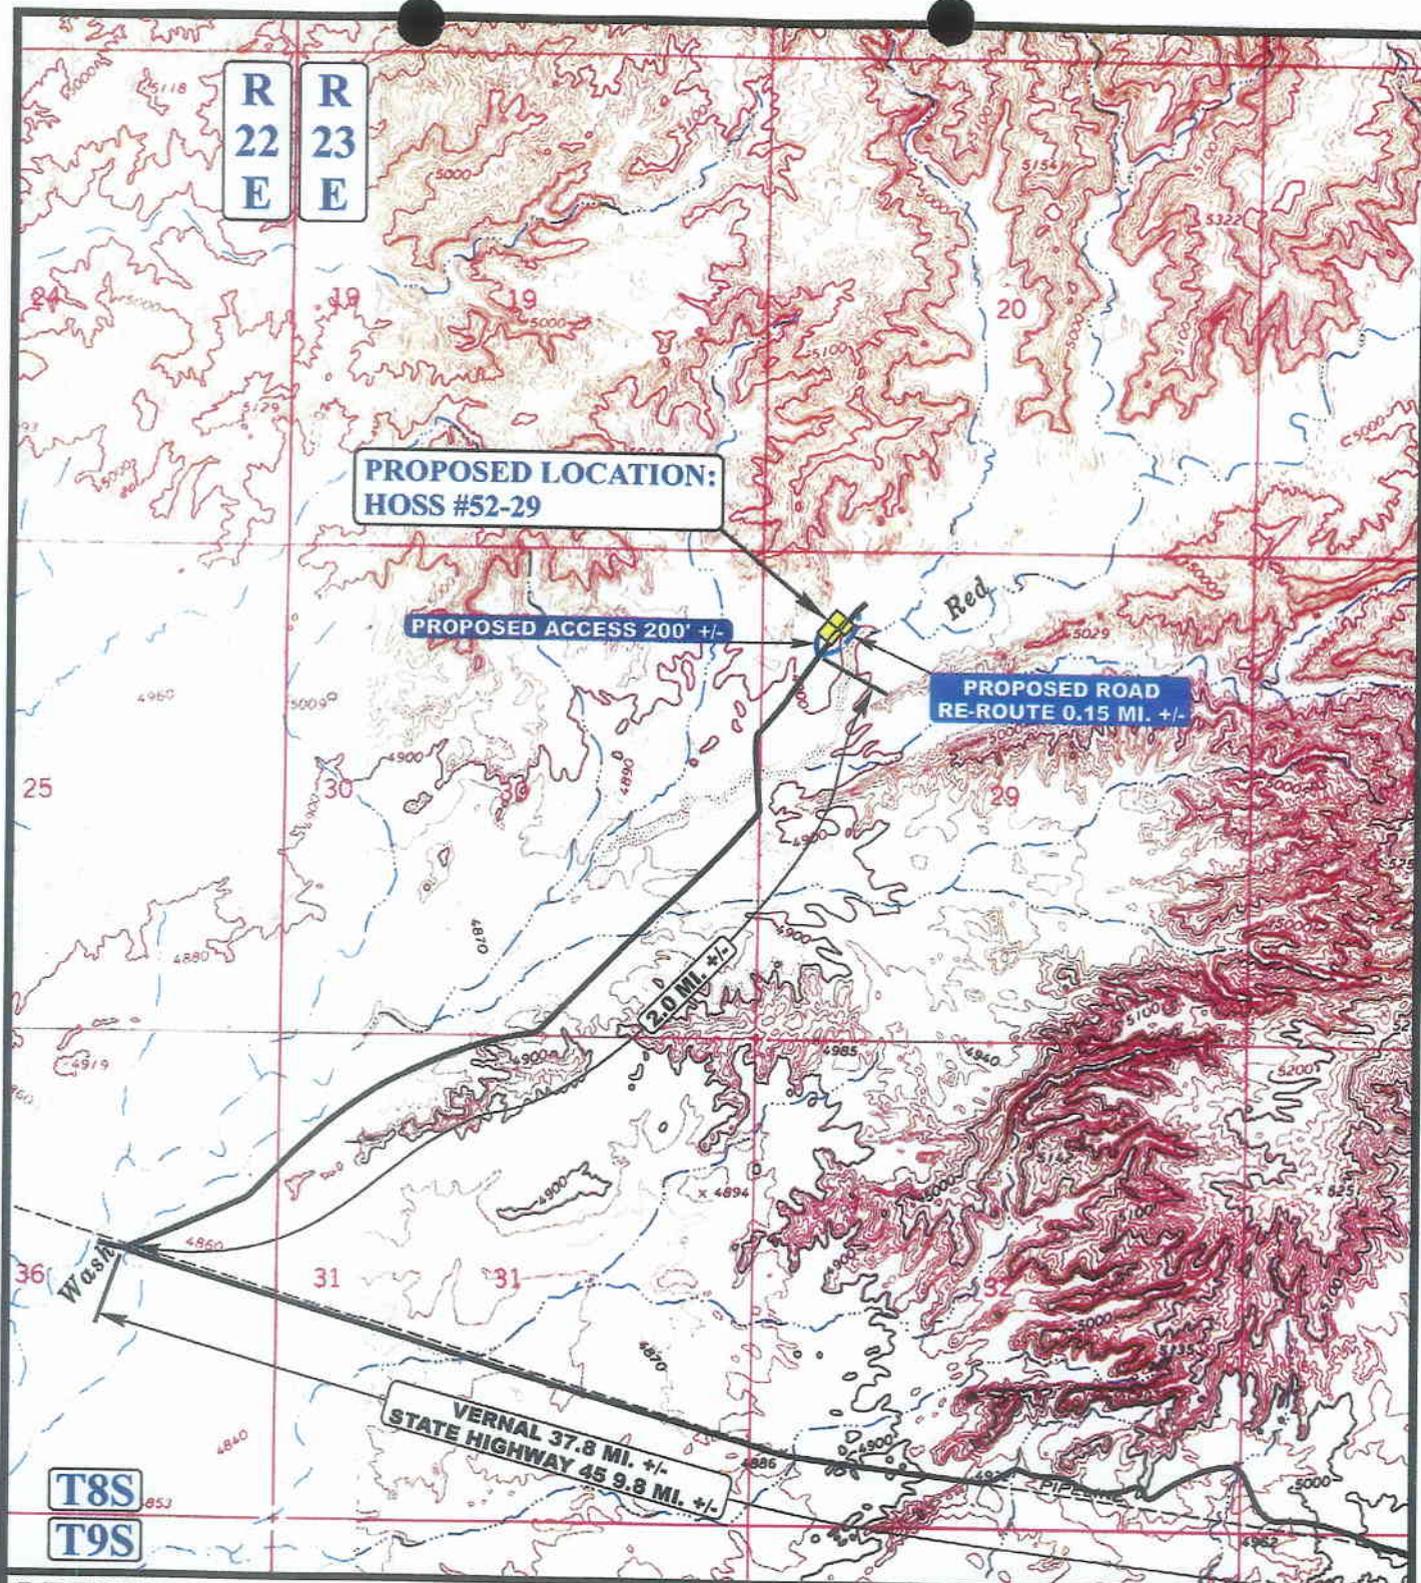

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD
-  PROPOSED ROAD RE-ROUTE



EOG RESOURCES, INC.

HOSS #52-29
SECTION 29, T8S, R23E, S.L.B.&M.
815' FNL 812' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 07 19 06
MAP MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



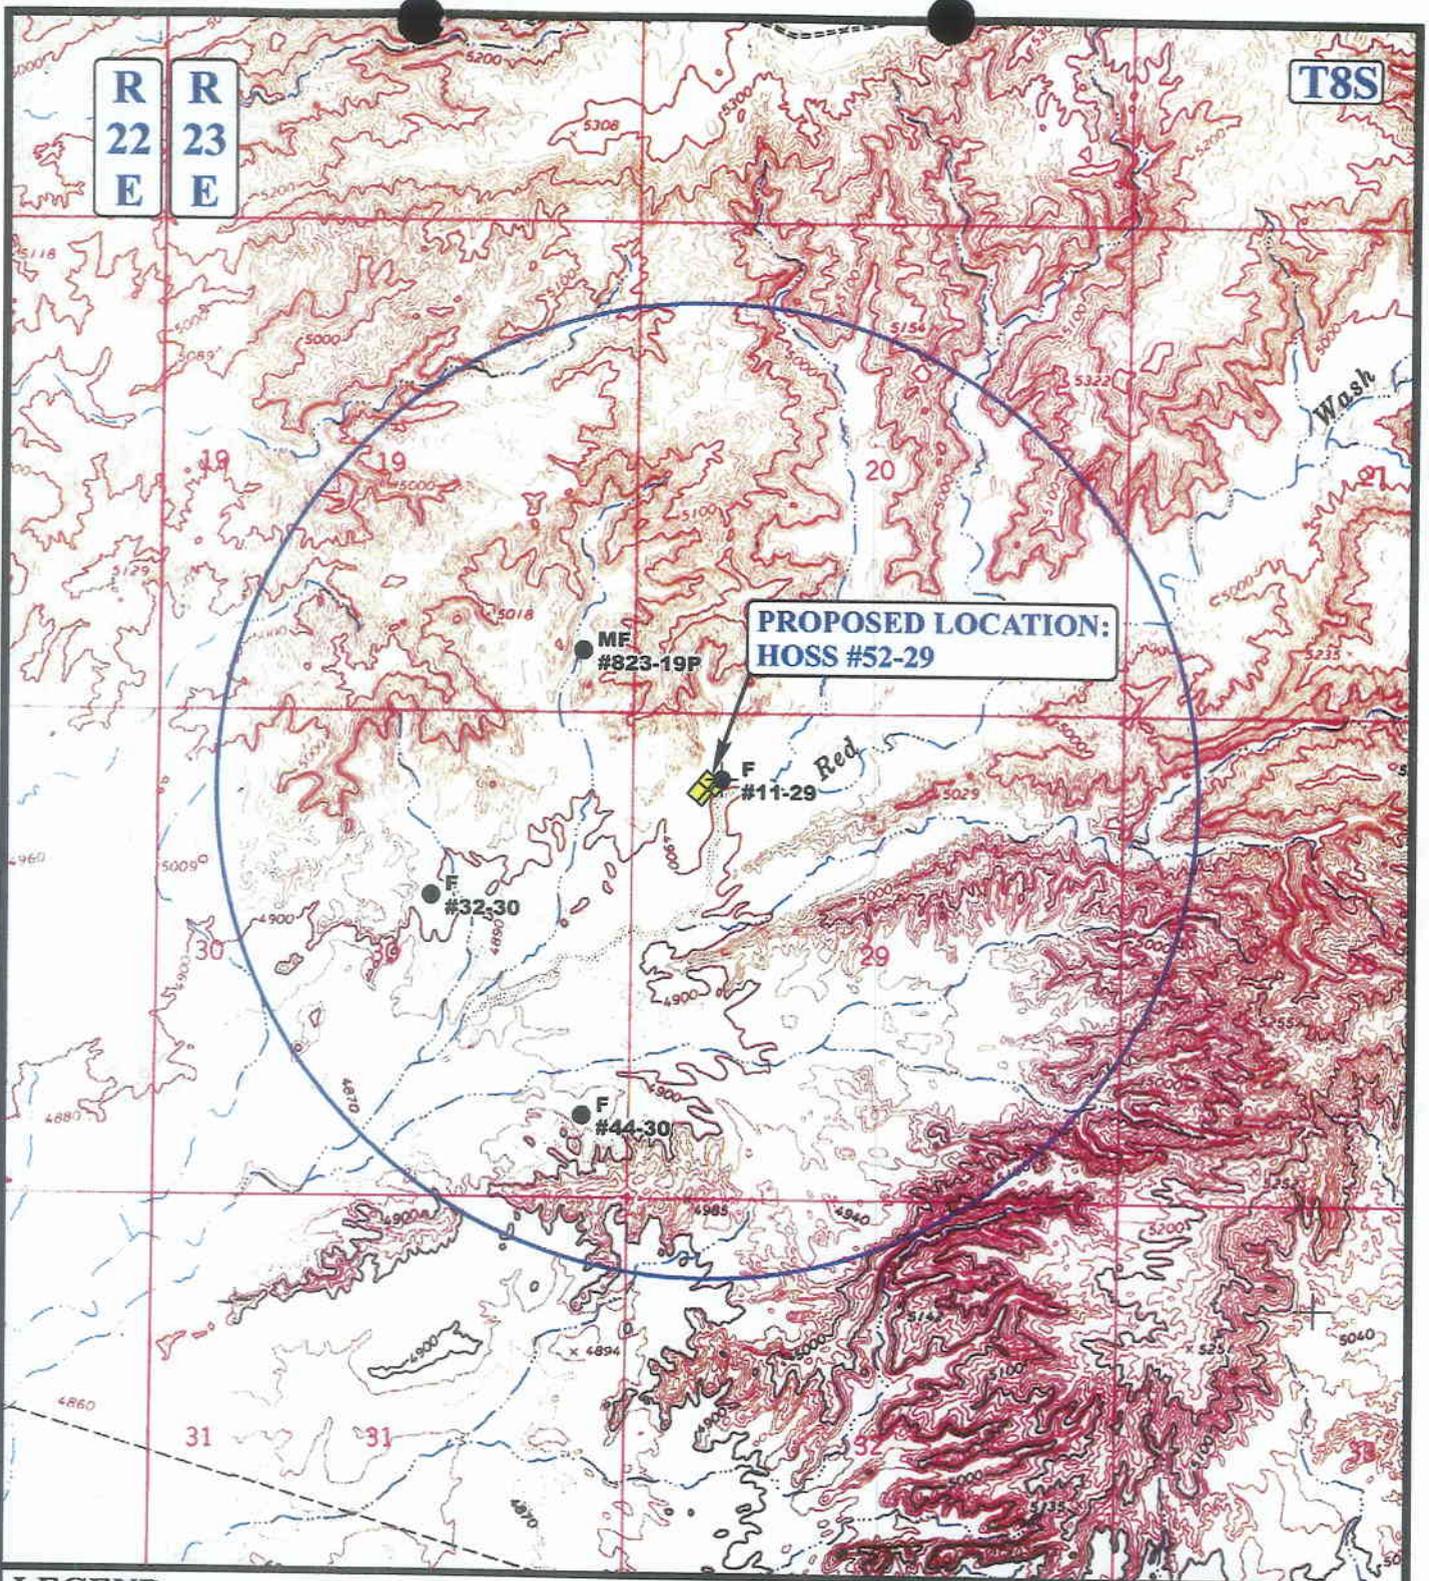

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



EOG RESOURCES, INC.

HOSS #52-29
SECTION 29, T8S, R23E, S.L.B.&M.
815' FNL 812' FWL




Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

07 19 06
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



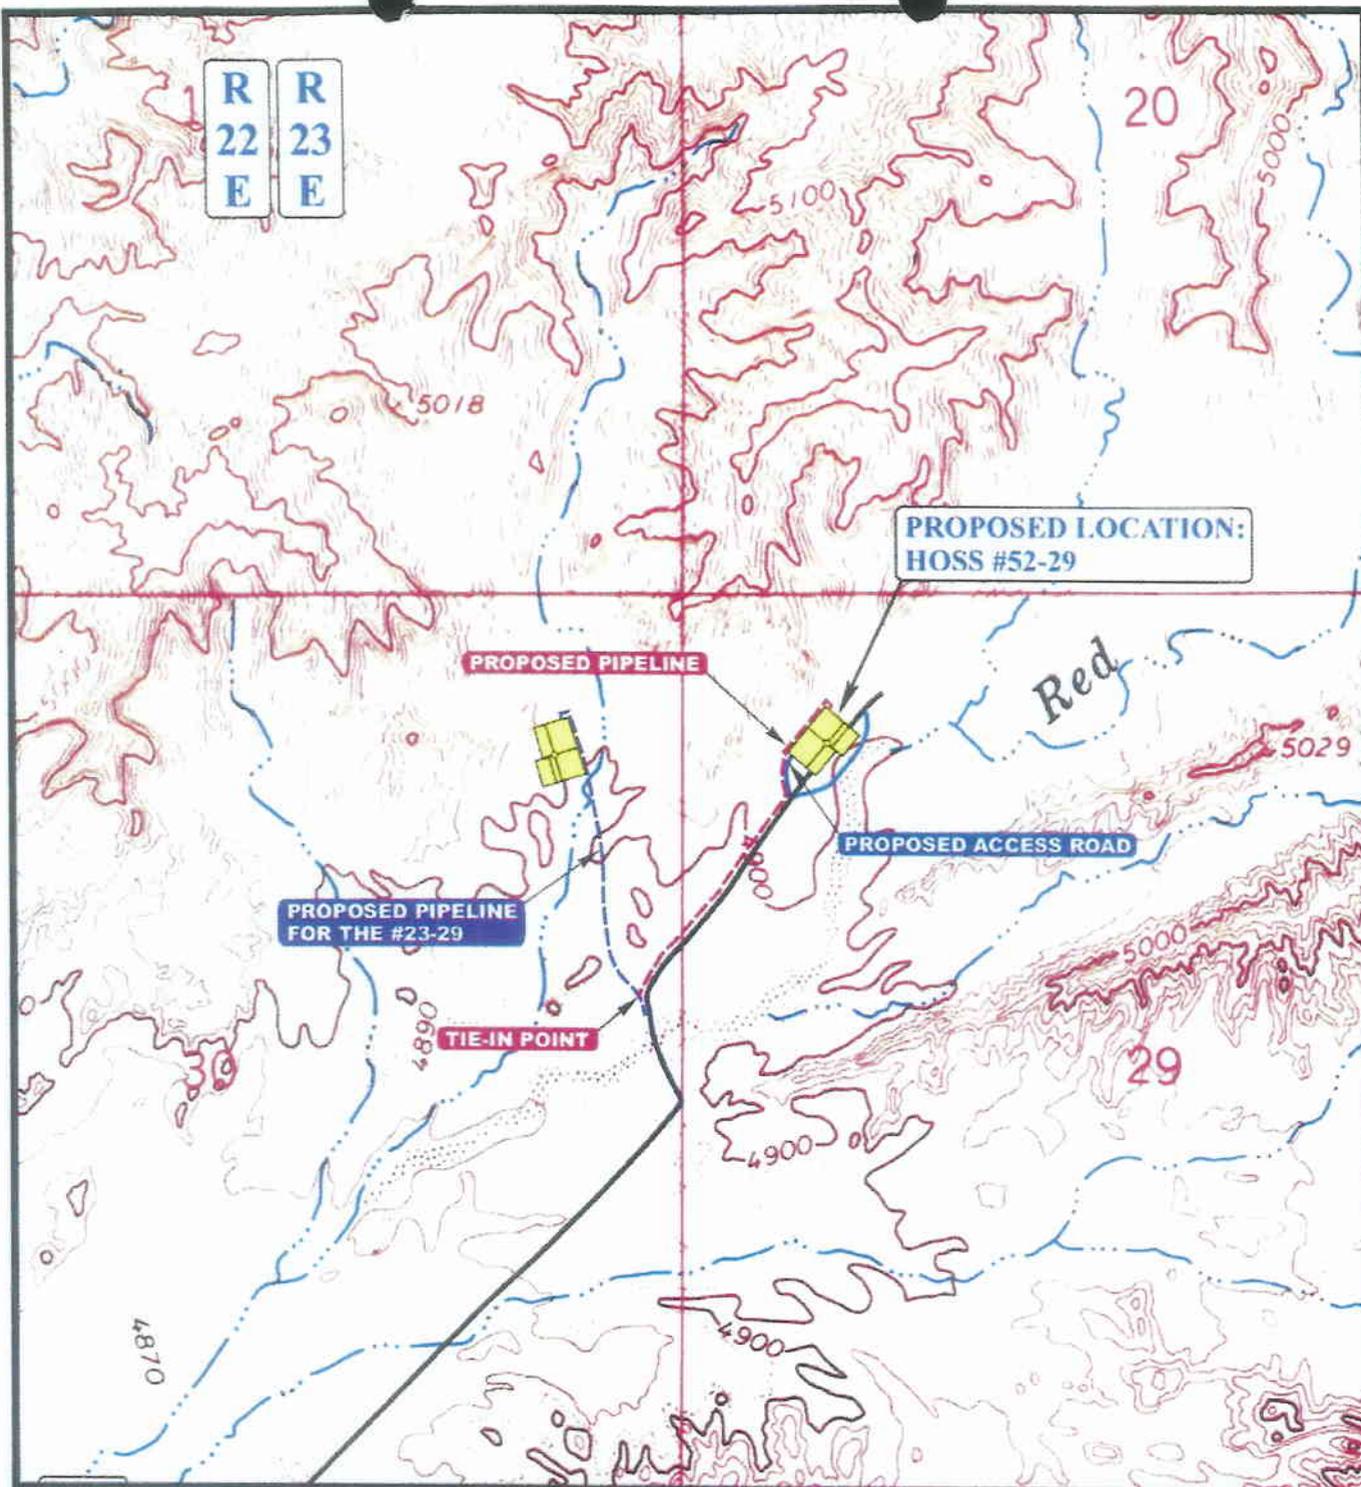

APPROXIMATE TOTAL PIPELINE DISTANCE = 2160' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED PIPELINE (SERVICING OTHER WELLS)



EOG RESOURCES, INC.

HOSS #52-29
SECTION 29, T8S, R23E, S.L.B.&M.
815' FNL 812' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 09 07 06
MAP MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: C.H. REVISED: 00-00-00

D
TOPO

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 12/05/2006

API NO. ASSIGNED: 43-047-38900

WELL NAME: HOSS 52-29
 OPERATOR: EOG RESOURCES INC (N9550)
 CONTACT: KAYLENE GARDNER

PHONE NUMBER: 435-789-0790

PROPOSED LOCATION:

NWNW 29 080S 230E
 SURFACE: 0815 FNL 0812 FWL
 BOTTOM: 0815 FNL 0812 FWL
 COUNTY: UINTAH
 LATITUDE: 40.09876 LONGITUDE: -109.3568
 UTM SURF EASTINGS: 640066 NORTHINGS: 4439802
 FIELD NAME: UNDESIGNATED (2)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DUG	12/20/06
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU 76042
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: PRRV
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM 2308)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-1501)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)
(wasatch, mesaverde)

LOCATION AND SITING:

- ___ R649-2-3.
- Unit: _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- ___ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- ___ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____

1- Federal Approval
 2- Spacing Strip
 3- Commingle

MULLIGAN
FED 823-19P

MULLIGAN
823-200

MULLIGAN UNIT

T8S R23E

HOSS 53-29

HOSS 36-30

FEDERAL
11-29

FEDERAL
41-29

HOSS 35-30

HOSS 50-29

HOSS 51-29

HOSS 29-30

HOSS 47-29

FEDERAL
23-39
FEDERAL
23-29

HOSS 48-29

HOSS 49-29

FEDERAL
44-30

HOSS 46-29

HOSS 44-29

FEDERAL
44-29

NATURAL BUTTES FIELD

FEDERAL
44-31

HOSS 24-32

HOSS 25-32

OPERATOR: EOG RESOURCES INC (N9550)

SEC: 29 T.8S R. 23E

FIELD: UNDESIGNATED (002)

COUNTY: UINTAH

SPACING: R649-3-2 / GENERAL SITING

Field Status


- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Wells Status

- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
DATE: 5-DECEMBER-2006



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

December 20, 2006

EOG Resources, Inc.
1060 East Highway 40
Vernal, UT 84078

Re: Hoss 52-29 Well, 815' FNL, 812' FWL, NW NW, Sec. 29, T. 8 South,
R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Administrative approval for commingling the production from the Wasatch formation and the Mesaverde formation in this well is hereby granted. Appropriate information has been submitted to DOGM in accordance with R649-3-22. No written objections from owners were received by DOGM.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-38900.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor (via e-mail)
Bureau of Land Management, Vernal District Office

Operator: EOG Resources, Inc.

Well Name & Number Hoss 52-29

API Number: 43-047-38900

Lease: UTU-76042

Location: NW NW Sec. 29 T. 8 South R. 23 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL FOR REENTER

RECEIVED

OCT 20 2006

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU 76042	
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator EOG RESOURCES, INC		7. If Unit or CA Agreement, Name and No.	
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078		8. Lease Name and Well No. HOSS 52-29	
3b. Phone No. (include area code) 435-781-9111		9. API Well No. 43-047-38900	
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface 815 FNL 812 FWL NWNW 40.098711 LAT 109.357494 LON At proposed prod. zone SAME		10. Field and Pool, or Exploratory NATURAL BUTTES	
11. Sec., T. R. M. or Blk. and Survey or Area SECTION 29, T8S, R23E S.L.B.&M		12. County or Parish UINTAH	
13. State UT		14. Distance in miles and direction from nearest town or post office* 39.8 MILES SOUTH OF VERNAL, UTAH	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660 LEASE LINE 530 DRILLING LINE	16. No. of acres in lease 1880	17. Spacing Unit dedicated to this well 40	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 175'	19. Proposed Depth 10,115	20. BLM/BIA Bond No. on file NM 2308	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4912 GL	22. Approximate date work will start*	23. Estimated duration 45 DAYS	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature 	Name (Printed Typed) KAYLENE R. GARDNER	Date 10/18/2006
Title SR. REGULATORY ASSISTANT		

Approved by (Signature) 	Name (Printed Typed) JERRY KENCZKA	Date 3-28-2007
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

06Bm1855A **CONDITIONS OF APPROVAL ATTACHED**
NOS 7/31/06 **NOTICE OF APPROVAL**
Entered in AFMSS
Date 11/17/06

RECEIVED

MAR 30 2007

DIV. OF OIL, GAS & MINING

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

- Within 90 calendar days of the approval date for this Application for Permit to Drill (APD), the operator/lessee shall submit to the Authorized Officer (AO), on Sundry Notice Form 3160-5, an Interim Surface Reclamation Plan for surface disturbance on well pads, access roads, and pipelines. At a minimum, this would include the reshaping of the pad to the original contour to the extent possible; the respreading of the top soil up to the rig anchor points; and, the area reseeded using appropriate reclamation methods. The AO will provide written approval or concurrence within 30 calendar days of receipt. During interim management of the surface, use the following seed mix:
 - 6 lbs of Hycrest Crested Wheatgrass and 6 lbs of needle and thread grass.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work, and contact the Authorized Officer (AO). A report will be prepared by the Paleontologist and submitted to the BLM at the completion of surface disturbing activities.
- All the culverts would be installed according to the BLM Gold Book.
- The road and well pad will have road base on the surface.
- Bury pipeline at all low water crossings.
- Reroute road when the pit has been closed. Keep main road on location till pit is closed. Close the pit as soon as possible after construction. Add Polly swell to pit and double the felt because of the closeness to the drainage. Keep all pit spoils out of drainage.
- Pipeline (4"surface) off lease and would need a right-of-way approximately 250 ft by 20 ft.

General Surface COA

Operator shall notify any active Gilsonite mining operation within 2 miles of the location 48 hours prior to any blasting during construction for this well.

DOWNHOLE CONDITIONS OF APPROVAL

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

- Electronic/mechanical mud monitoring equipment shall be required, from surface casing shoe to TD, which shall include as a minimum: pit volume totalizer (PVT); stroke counter; and flow sensor.
- A formation integrity test shall be performed at the surface casing shoe.
- A Cement Bond Log (CBL) shall be run in the production casing from the TD to the top of cement. A field copy of the CBL shall be submitted to the BLM Vernal Field Office for review.

Variance Granted:

75 foot long blooie line approved.

Commingling:

- Downhole commingling for the Wasatch, Mesaverde, and Mancos formations is approved. Authorized Officer reserves the right to rescind this approval if conditions change. Authorized Officer also reserves the right to require allocation of production volumes between the Wasatch, Mesaverde, and Mancos if deemed necessary.

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests

shall be performed by a test pump with a chart recorder and NOT by the rig pumps. Test shall be reported in the driller's log.

- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The lessee/operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled and analyzed (a copy of the analyses to be submitted to the BLM Field Office in Vernal, Utah).
- All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
- The lessee/operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, etc.) to Peter Sokolosky or another geologist of the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- All shows of fresh water and minerals shall be reported and protected. A sample shall be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office shall be obtained and notification given before resumption of operations.
- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- Any change in the program shall be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) shall be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.
- Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new

ground, shall require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.

- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.
- A cement bond log (CBL) will be run from the production casing shoe to the surface casing shoe and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease shall have prior written approval from the BLM, Vernal Field Office.
- All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- This APD is approved subject to the requirement that, shall the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is

placed on production. The notification shall provide, as a minimum, the following informational items:

- Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and / or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.
 - All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
 - Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
 - Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU-76042
2. Name of Operator EOG Resources, Inc.		6. If Indian, Allottee or Tribe Name
3a. Address 600 17th Street, Suite 1000N, Denver, CO 80202	3b. Phone No. (include area code) 303-824-5526	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 815' FNL & 812' FWL (NWNW) Sec. 29-T8S-R23E 40.098711 LAT 109.357494 LON		8. Well Name and No. Hoss 52-29
		9. API Well No. 43-047-38900
		10. Field and Pool, or Exploratory Area Natural Buttes/Wasatch/Mesaverde
		11. County or Parish, State Uintah County, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Change location layout
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

As per verbal approval with Paul Buhler, BLM Vernal Field Office, EOG Resources, Inc. requests authorization to change the location layout, as per the attached revised plat, for the referenced well. The original location layout did not provide adequate surface disturbance to install rig anchors at distances as required by the manufacturer and API specifications.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

RECEIVED
APR 25 2007


DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Mary A. Maestas

Title **Regulatory Assistant**

Signature



Date

04/24/2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

T8S, R23E, S.L.B.&M.

EOG RESOURCES, INC.


Well location, HOSS #52-29, located as shown in the NW 1/4 NW 1/4 of Section 29, T8S, R23E, S.L.B.&M., Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.



BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

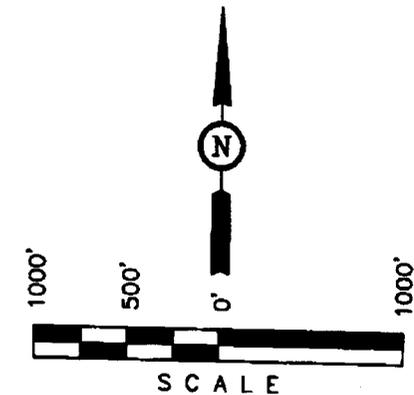

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE DESCRIBED INFORMATION WAS OBTAINED FROM FIELD NOTES OF ACTUAL SURVEYS AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

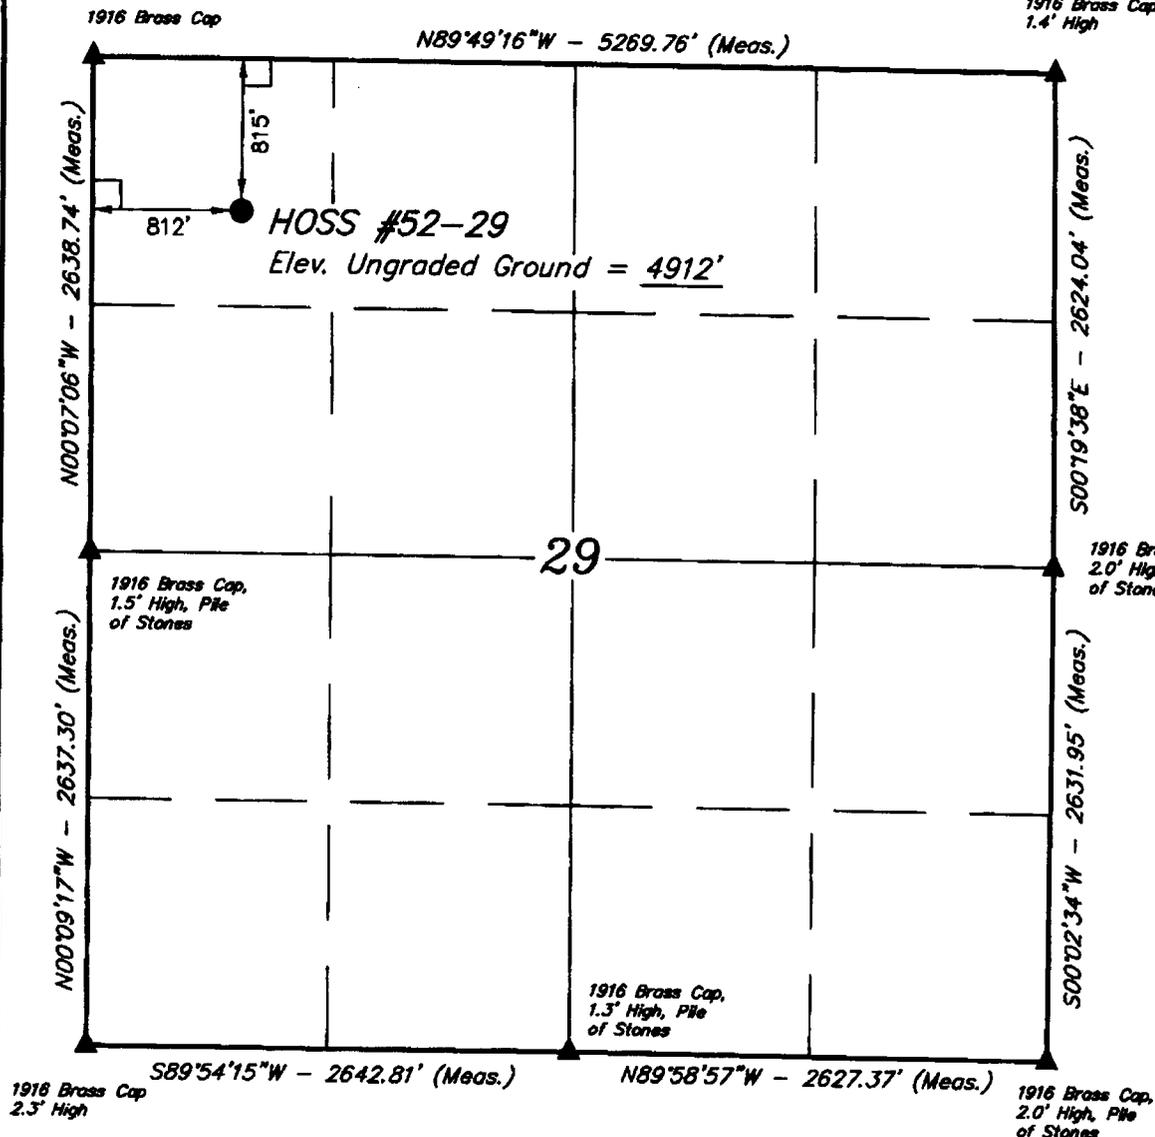

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 40°05'55.36" (40.098711)
 LONGITUDE = 109°21'26.98" (109.357494)
 (NAD 27)
 LATITUDE = 40°05'55.49" (40.098747)
 LONGITUDE = 109°21'24.53" (109.356814)

UINTAH ENGINEERING & SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017


SCALE 1" = 1000'	DATE SURVEYED: 07-17-06	DATE DRAWN: 07-20-06
PARTY J.R. A.A. C.H.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

EOG RESOURCES, INC.





FIGURE #2

TYPICAL CROSS SECTIONS FOR

HOSS #52-29
SECTION 29, T8S, R23E, S.L.B.&M.
815' FNL 812' FWL



DATE: 07-20-06
Drawn By: C.H.
REVISED: 01-03-07 S.L.

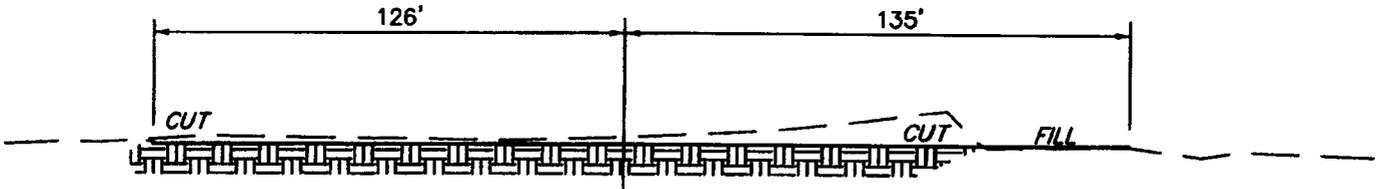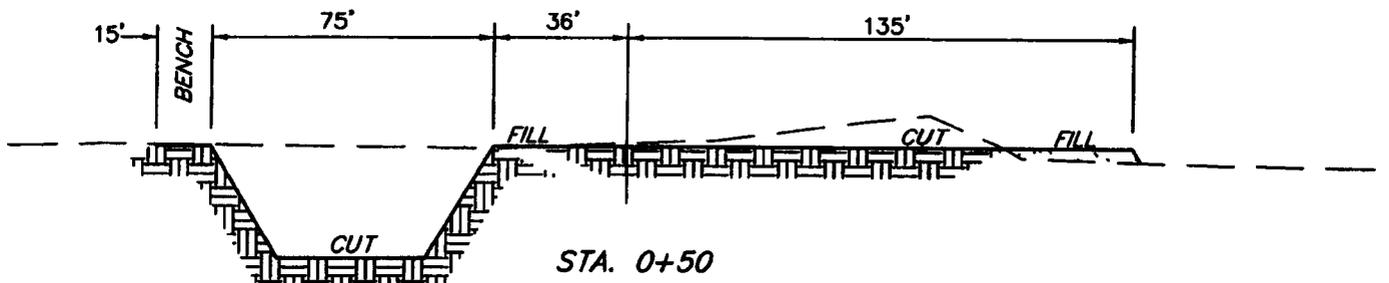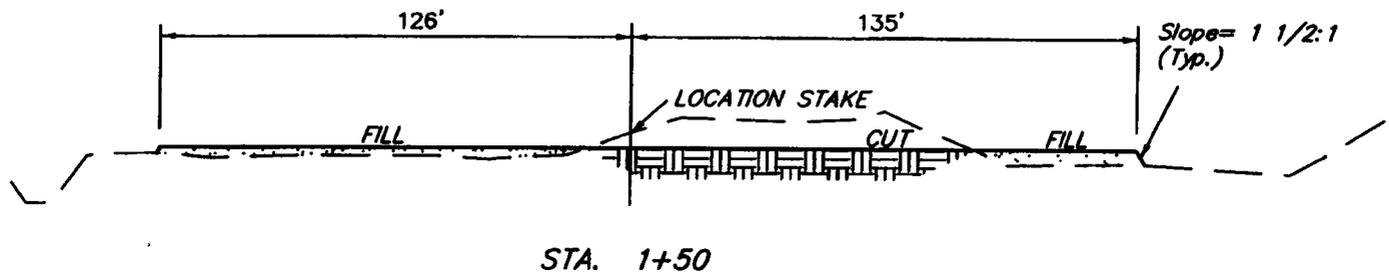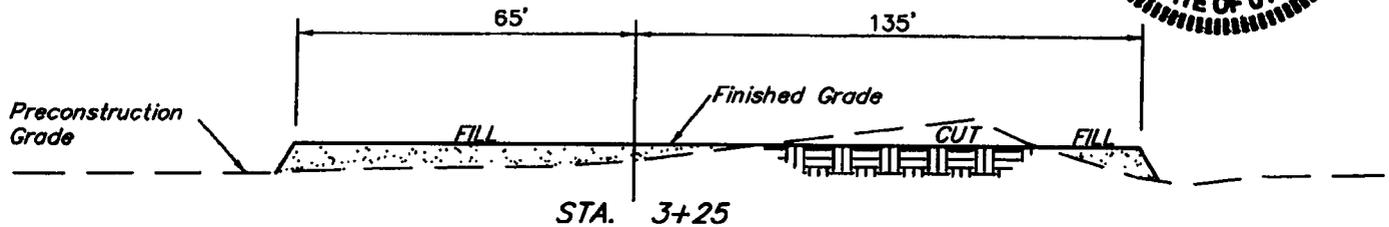

NOTE:
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

* NOTE:
FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,600 Cu. Yds.
Remaining Location	= 4,570 Cu. Yds.
TOTAL CUT	= 6,170 CU.YDS.
FILL	= 2,910 CU.YDS.

EXCESS MATERIAL	= 3,260 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,260 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 0 Cu. Yds.

EOG RESOURCES, INC.


PRODUCTION FACILITY LAYOUT FOR

HOSS #39-30


SECTION 30, T8S, R23E, S.L.B.&M.

818' FNL 622' FWL

Access
Road



SCALE: 1" = 50'
DATE: 07-19-06
Drawn By: C.H.
REVISED: 01-03-07 S.L.

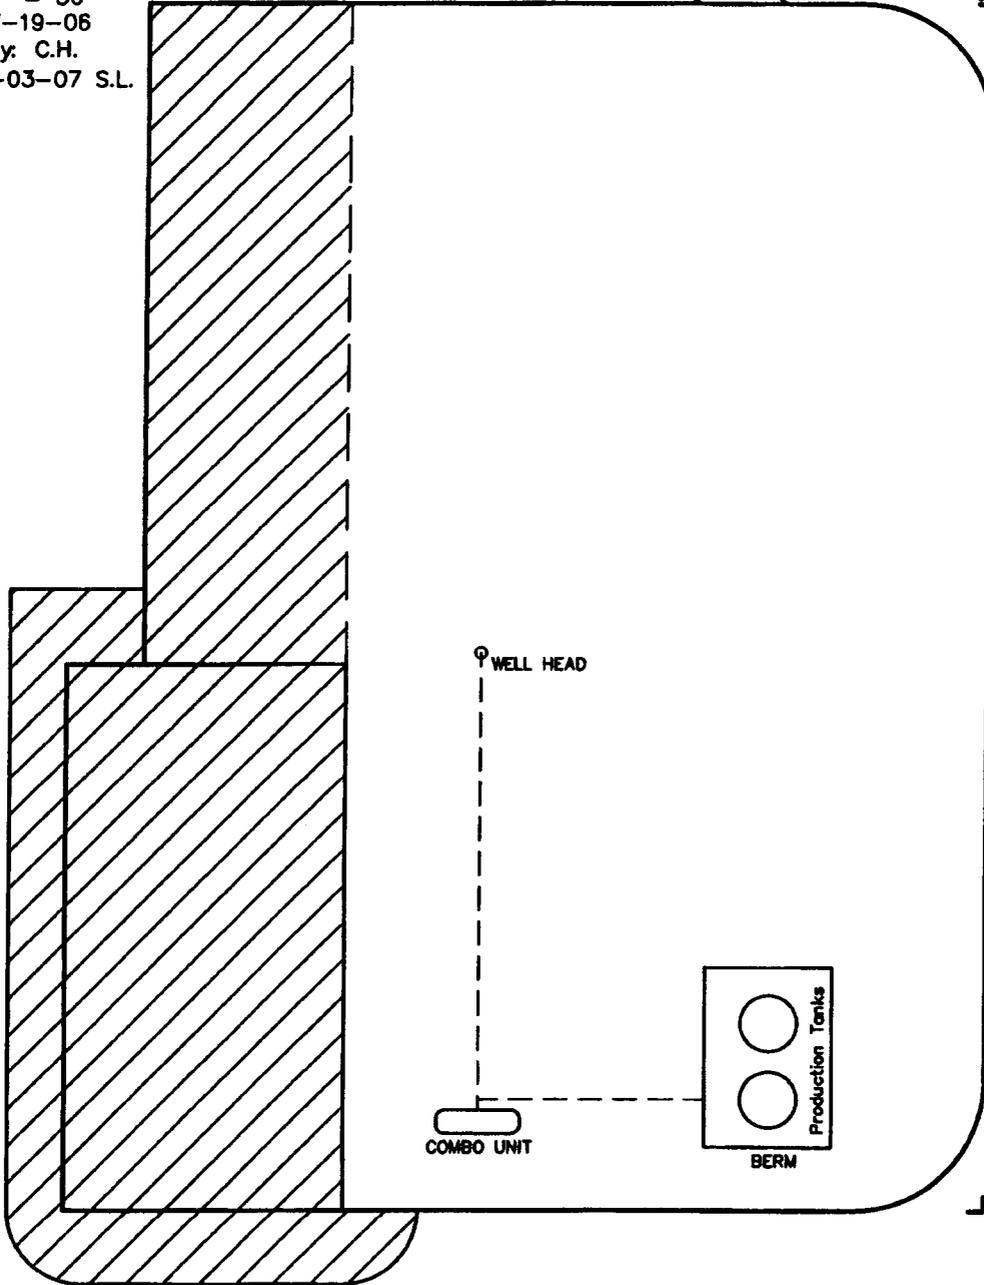

 RE-HABED AREA

EOG RESOURCES, INC.

HOSS #52-29

LOCATED IN UINTAH COUNTY, UTAH
SECTION 29, T8S, R23E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: NORTHWESTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	07	19	06	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: J.R.	DRAWN BY: C.P.		REVISED: 00-00-00	

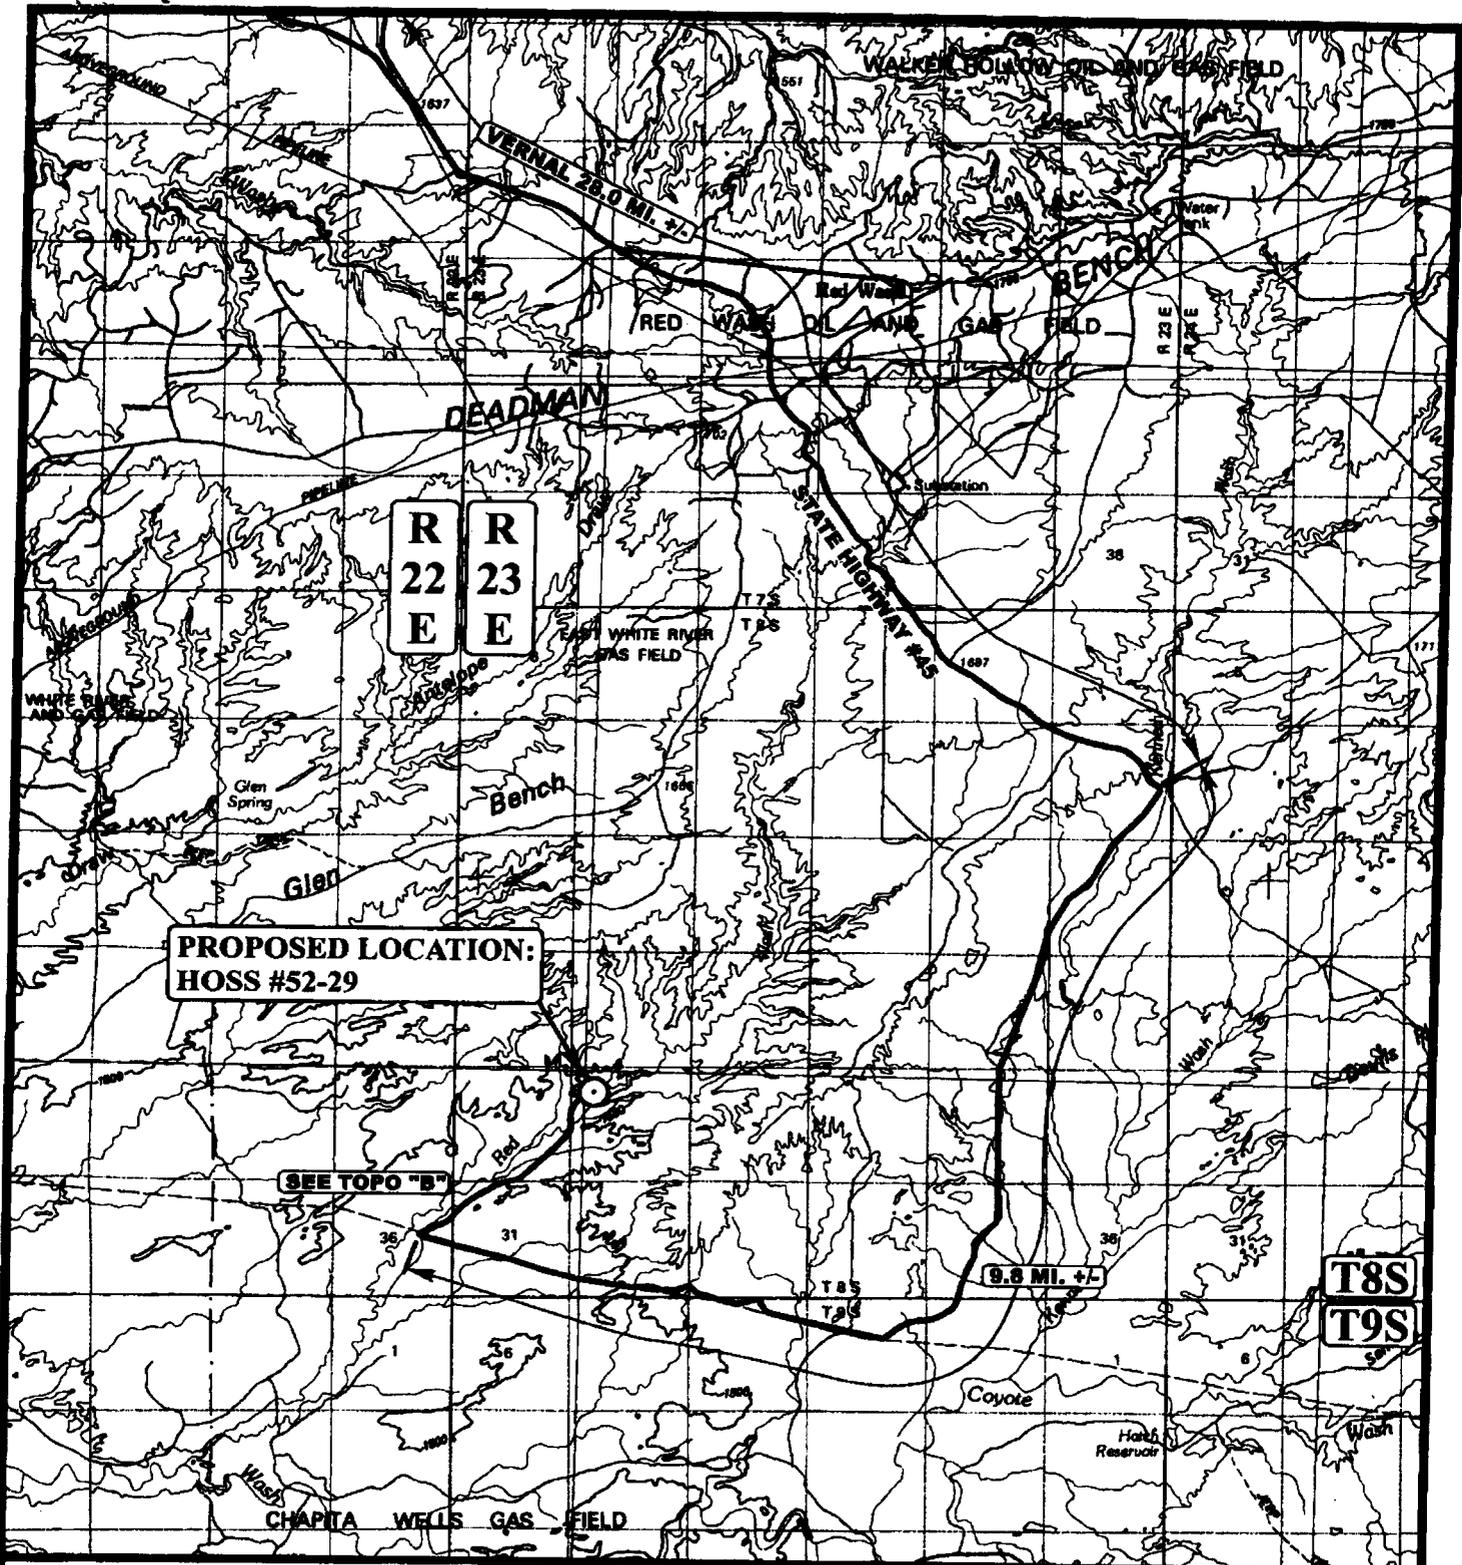

**PROPOSED LOCATION:
HOSS #52-29**

SEE TOPO "B"

0.8 MI. +/-

**T8S
T9S**

LEGEND:

○ PROPOSED LOCATION

N

EOG RESOURCES, INC.

**HOSS #52-29
SECTION 29, T8S, R23E, S.L.B.&M.
815' FNL 812' FWL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




**TOPOGRAPHIC
MAP**


07 19 06
MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: C.P. REVISED: 00-00-00



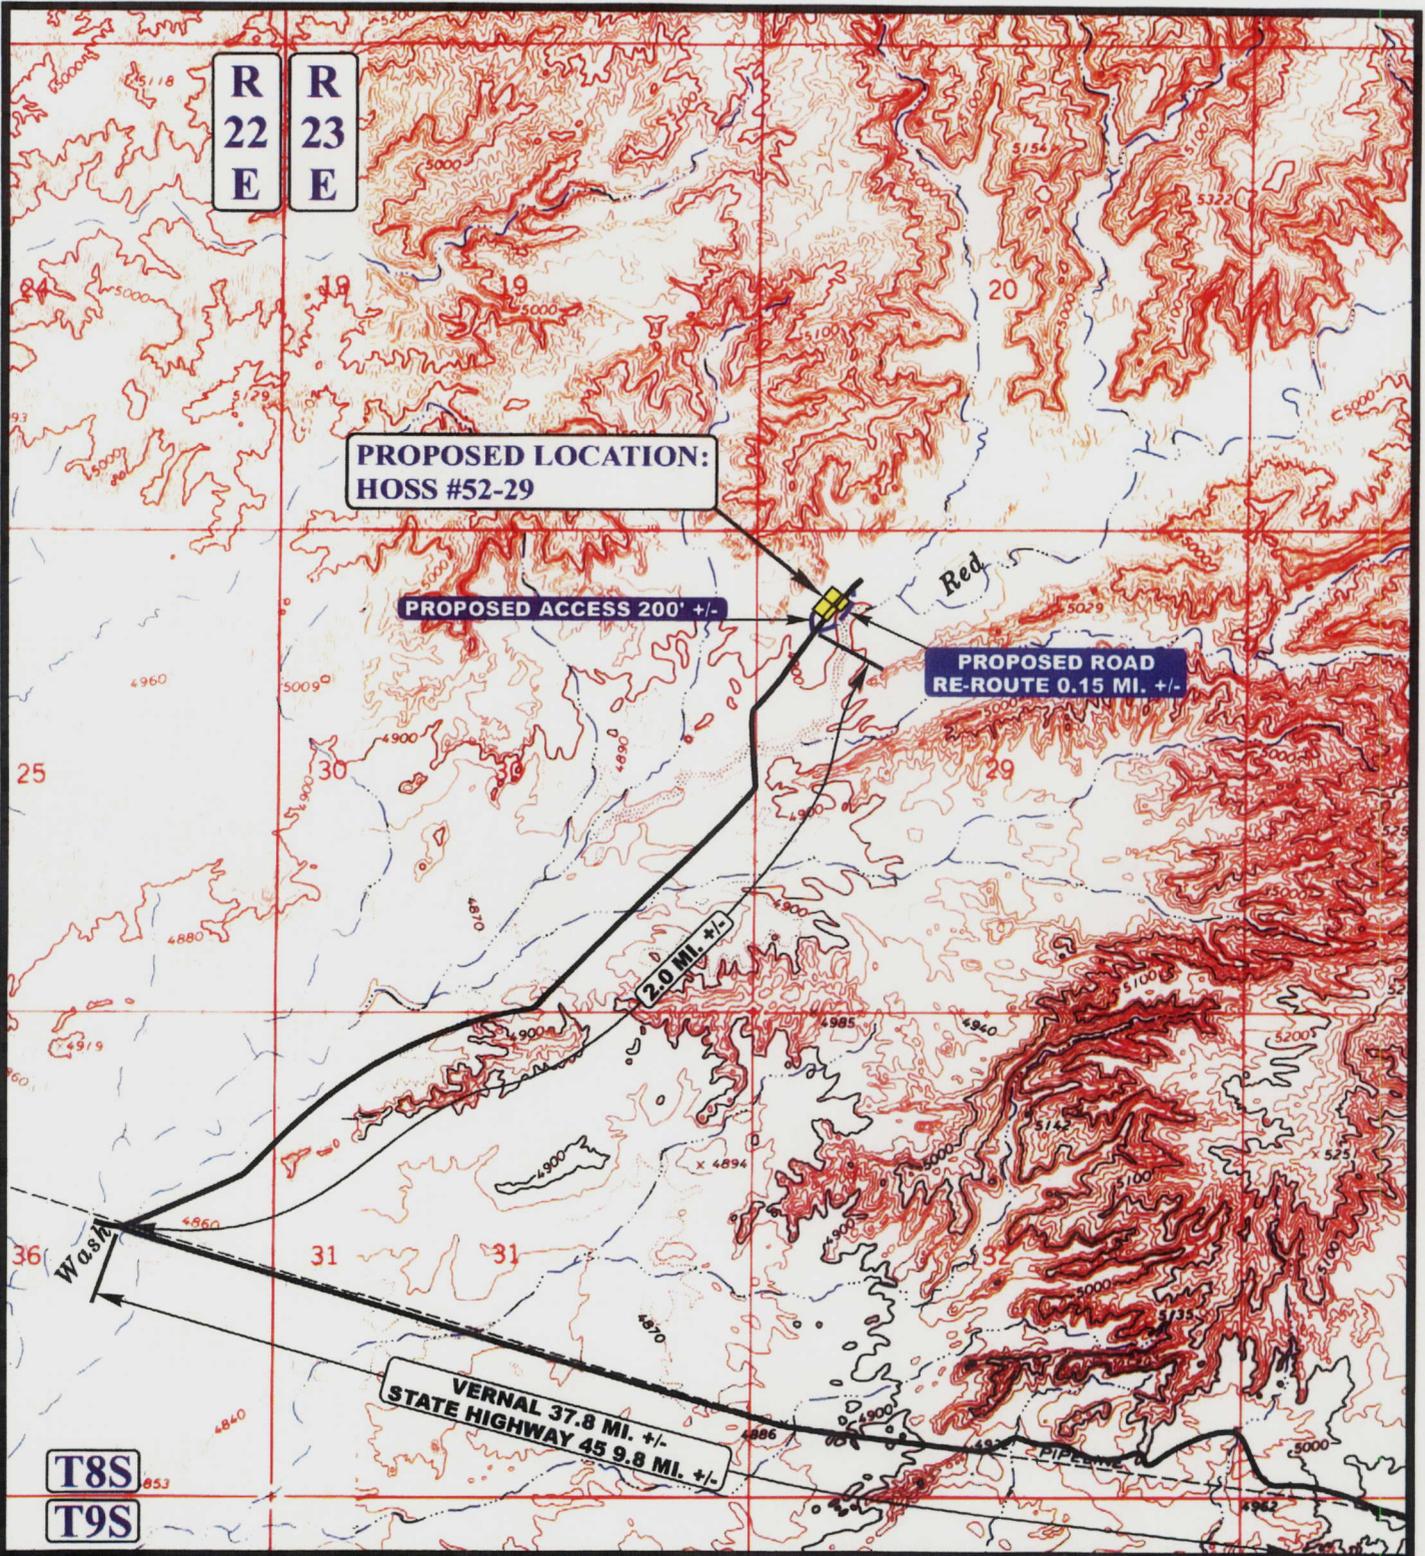

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD
-  PROPOSED ROAD RE-ROUTE


EOG RESOURCES, INC.

HOSS #52-29
SECTION 29, T8S, R23E, S.L.B.&M.
815' FNL 812' FWL

U&L S
Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP **07 19 06**
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00 **B**
 TOPO

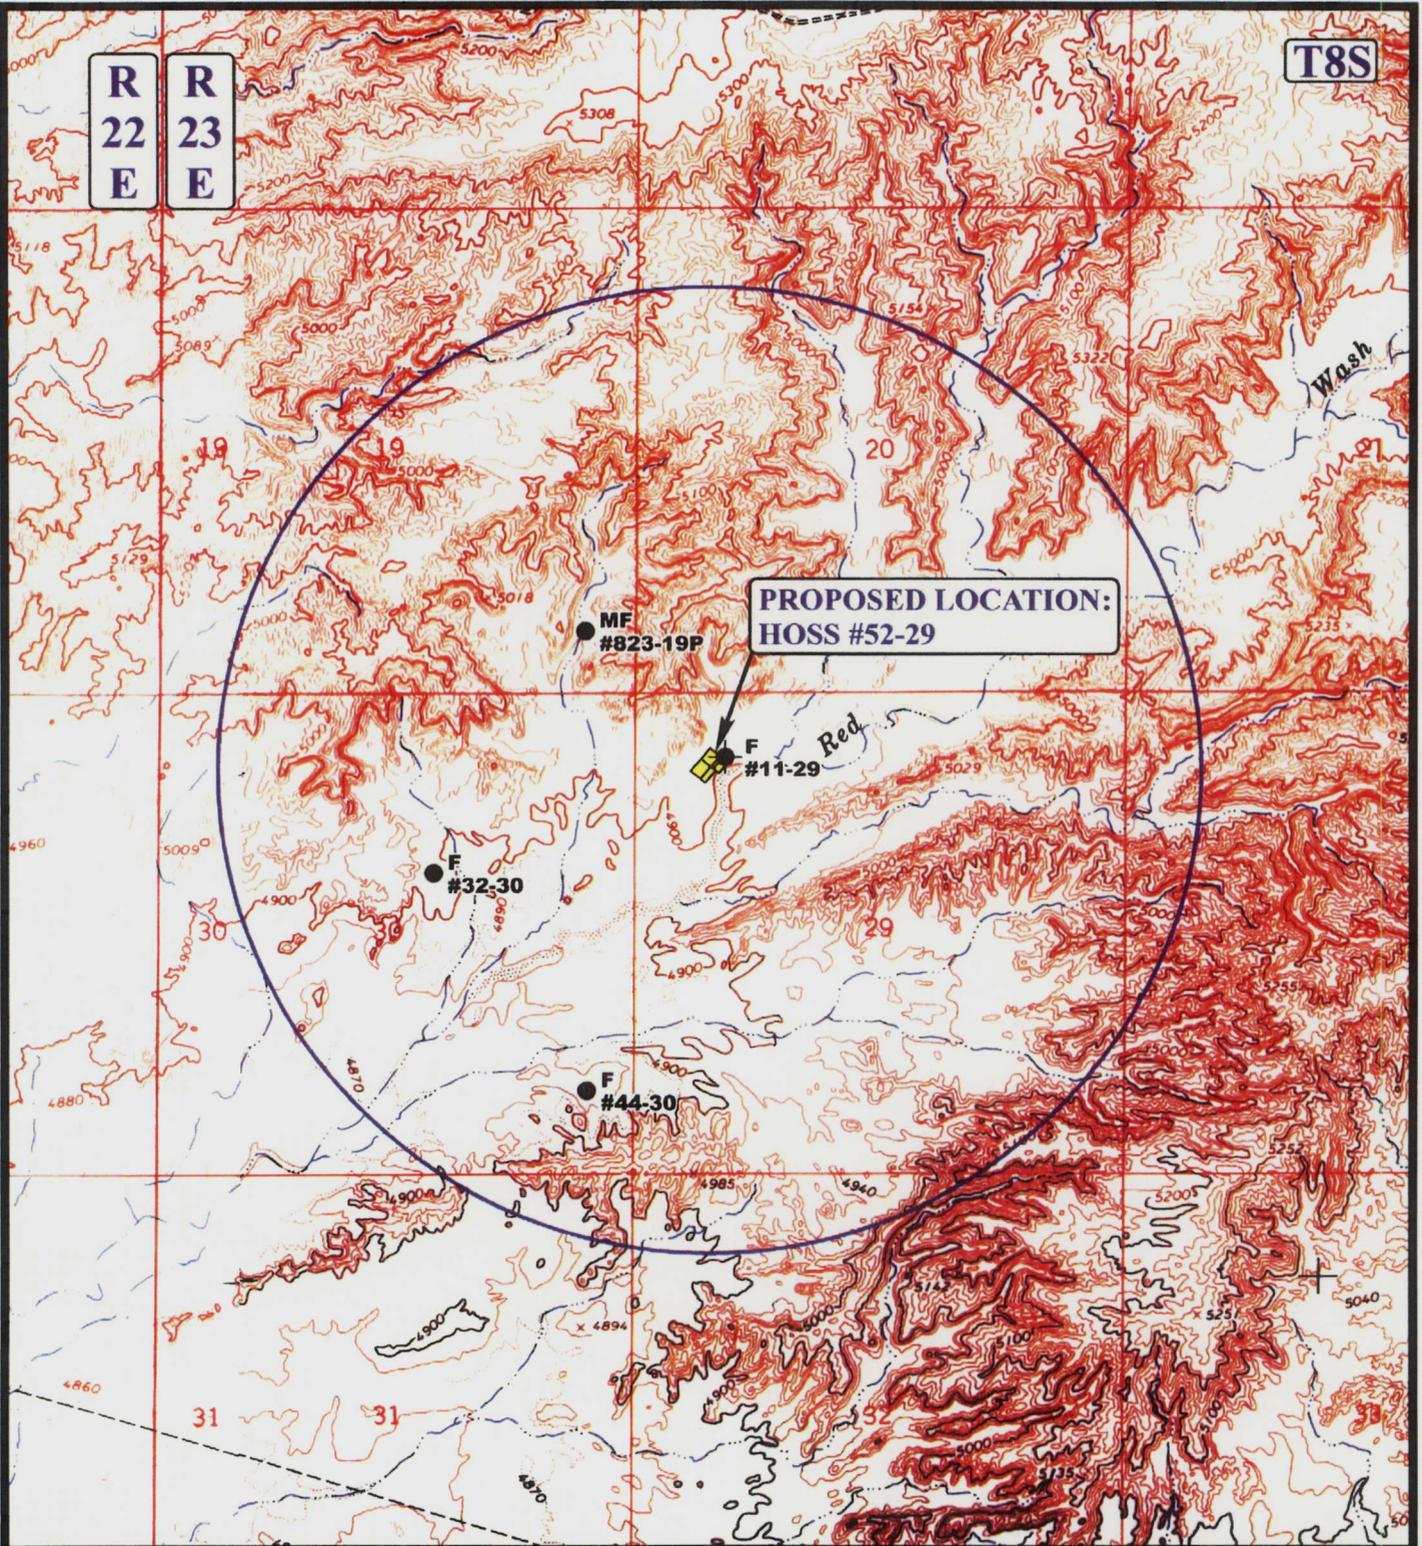

LEGEND:

- | | |
|-------------------|-------------------------|
| ⊗ DISPOSAL WELLS | ⊗ WATER WELLS |
| ● PRODUCING WELLS | ● ABANDONED WELLS |
| ● SHUT IN WELLS | ● TEMPORARILY ABANDONED |




EOG RESOURCES, INC.

HOSS #52-29
SECTION 29, T8S, R23E, S.L.B.&M.
815' FNL 812' FWL



U&L S **Utah Engineering & Land Surveying**
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP **07 19 06**
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00 **C TOPO**

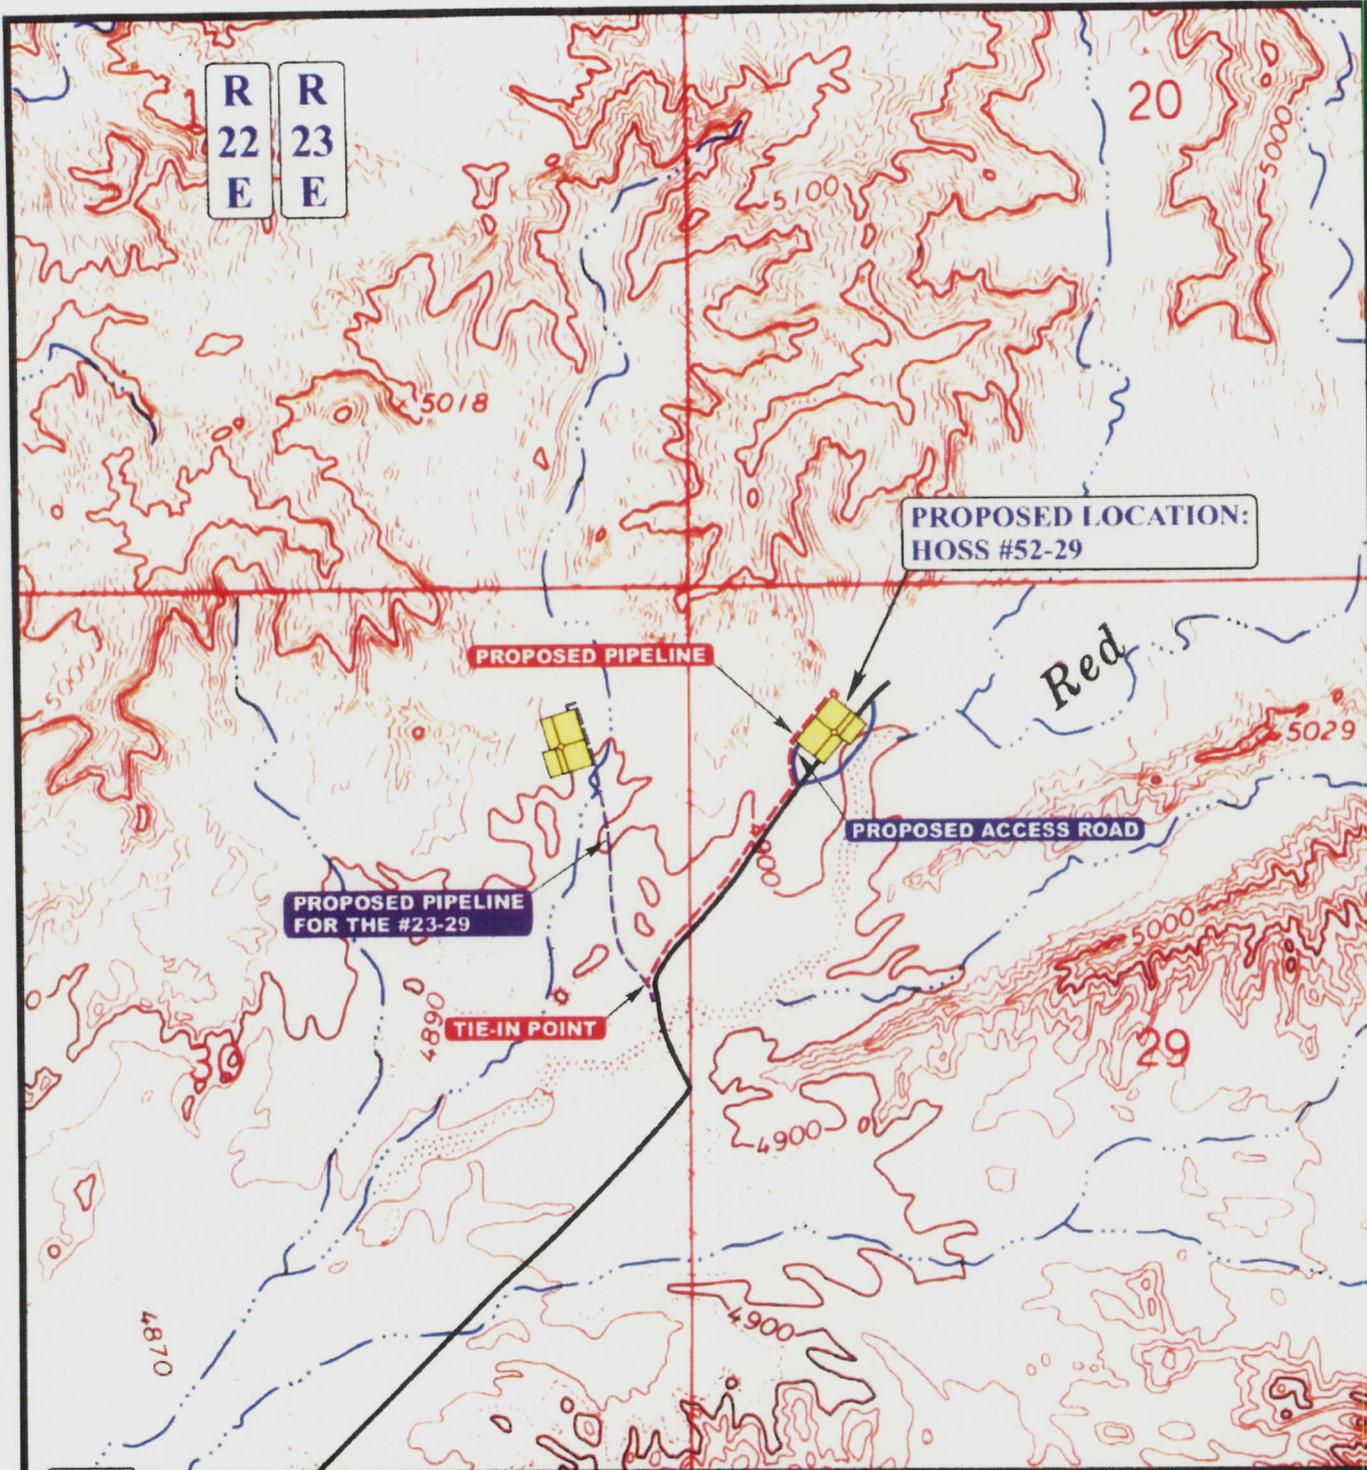

APPROXIMATE TOTAL PIPELINE DISTANCE = 2160' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE
-  PROPOSED PIPELINE (SERVICING OTHER WELLS)

EOG RESOURCES, INC.

HOSS #52-29
SECTION 29, T8S, R23E, S.L.B.&M.
815' FNL 812' FWL



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 09 07 06
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: C.H. REVISED: 00-00-00



STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:

UTU-76042

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL

OIL WELL

GAS WELL

OTHER _____

8. WELL NAME and NUMBER:

Hoss 52-29

2. NAME OF OPERATOR:

EOG RESOURCES, INC.

9. API NUMBER:

43-047-38900

3. ADDRESS OF OPERATOR:

1060 East Highway 40

CITY

VERNAL

STATE

UT

ZIP

84078

PHONE NUMBER:

(435) 789-0790

10. FIELD AND POOL, OR WILDCAT:

NATURAL BUTTES

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 815 FNL - 812 FWL 40.098711 LAT 109.357494 LON

COUNTY: UINTAH

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWNW 29 8S 23E S.L.B. & M

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION REQUEST</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 12-24-07
By: [Signature]

NAME (PLEASE PRINT) Kaylene R. Gardner

TITLE Lead Regulatory Assistant

SIGNATURE [Signature]

DATE 12/12/2007

(This space for State use only)

RECEIVED

DEC 20 2007

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-38900
Well Name: Hoss 52-29
Location: 815 FNL - 812 FWL (NWNW), SECTION 29, T8S, R23E S.L.B.&M
Company Permit Issued to: EOG Resources, Inc.
Date Original Permit Issued: 12/20/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

8/15/2007

Date

Title: Lead Regulatory Assistant

Representing: EOG Resources, Inc.

RECEIVED
DEC 20 2007
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

MAR 07 2008

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

BLM

5. Lease Serial No.
UTU76042

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
HOSS 52-29

9. API Well No.
43-047-38900-00-X1

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. County or Parish, and State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EOG RESOURCES INC
Contact: KAYLENE R GARDNER
E-Mail: kaylene_Gardner@eogresources.com

3a. Address
1060 EAST HIGHWAY 40
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435-781-9111

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 29 T8S R23E NWNW 815FNL 812FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Change to Original APD
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. respectfully requests the APD for the referenced well originally approved 3/28/2007 be extended for one year.

RECEIVED

MAR 24 2008

CONDITIONS OF APPROVAL ATTACHED

VERNAL DIST. _____

ENG. _____

GEOL. _____

E.S. _____

PET. _____

A.M. _____


14. I hereby certify that the foregoing is true and correct.

Electronic Submission #58989 verified by the BLM Well Information System
For EOG RESOURCES INC, sent to the Vernal
Committed to AFMSS for processing by GAIL JENKINS on 03/10/2008 (08GXJ2593SE)

Name (Printed/Typed) KAYLENE R GARDNER Title LEAD REGULATORY ASSISTANT

Signature (Electronic Submission) Date 03/07/2008

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By  Title **Petroleum Engineer** Date **MAR 13 2008**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



** BLM REVISED **

CONDITIONS OF APPROVAL

EOG Resources, Inc.

Notice of Intent APD Extension

Lease: UTU-76042
Well: Hoss 52-29
Location: NWNW Sec 29-T8S-R23E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 3/28/09.
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Ryan Angus of this office at (435) 781-4430

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG Resources, Inc.**

3a. Address
1060 E. HWY 40 Vernal, UT 84078

3b. Phone No. (include area code)
435-789-0790

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Multiple (See Attached)
43 047 38900
HOSS 52-29
8S 23E 29

- 5. Lease Serial No.
Multiple (See Attached)
- 6. If Indian, Allottee or Tribe Name
- 7. If Unit or CA/Agreement, Name and/or No.
- 8. Well Name and No.
Multiple (See Attached)
- 9. API Well No.
Multiple (See Attached)
- 10. Field and Pool, or Exploratory Area
Natural Buttes
- 11. County or Parish, State
Uintah County, Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Air Drilling Variance Request
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. respectfully requests authorization for air drilling operations, see attached.

COPY SENT TO OPERATOR

Date: 10.14.2008

Initials: KS

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Mickenzie Thacker

Title **Operations Clerk**

Signature

Mickenzie Thacker

Date

09/17/2008

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

[Signature]

Title

Ret. Eng.

Date

10/7/08

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

DOG M

Federal Approval Of This Action Is Necessary

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

(Instructions on page 2)

SEP 22 2008

DIV. OF OIL, GAS & MINING

API #	Lease #	Well Name	Footages	¼-¼ Legal Description
43-047-38715	UTU-56965	HOSS 22-32	1671' FSL 1998' FEL	NWSE Sec. 32 T8S R23E
43-047-38698	UTU-76042	HOSS 44-29	631' FSL 2357' FEL	SWSE Sec. 29 T8S R23E
43-047-38900	UTU-76042	HOSS 52-29	815' FNL 812' FWL	NWNW Sec. 29 T8S R23E
43-047-38899	UTU-76042	HOSS 53-29	267' FNL 2011' FWL	NENW Sec. 29 T8S R23E
43-047-50048	UTU-76042	HOSS 54-29	2608' FNL 2172' FEL	SWNE Sec. 29 T8S R23E
43-047-50009	UTU-76042	HOSS 57-29	1123' FNL 1004' FEL	NENE Sec. 29 T8S R23E
43-047-39706	UTU-64422	HOSS 73-33	1956' FSL 2056' FWL	NESW Sec. 33 T8S R23E
43-047-38361	UTU-64422	HOSS 74-34	706' FSL 493' FWL	SWSW Sec. 34 T8S R23E
43-047-39329	UTU-64422	HOSS 78-27	586' FSL 2044' FEL	SWSE Sec. 27 T8S R23E
43-047-39328	UTU-64422	HOSS 79-27	764' FSL 737' FEL	SESE Sec. 27 T8S R23E
43-047-39692	UTU-76042	HOSS 80-26	1980' FSL 586' FWL	NWSW Sec. 26 T8S R23E
43-047-39327	UTU-76042	HOSS 81-26	494' FSL 505' FWL	SWSW Sec. 26 T8S R23E
43-047-39326	UTU-76042	HOSS 82-26	839' FSL 1808' FWL	SESW Sec. 26 T8S R23E
43-047-39325	UTU-76042	HOSS 83-35	752' FNL 593' FWL	NWNW Sec. 35 T8S R23E
43-047-39324	UTU-76042	HOSS 84-35	722' FNL 1968' FWL	NENW Sec. 35 T8S R23E
43-047-39323	UTU-76042	HOSS 85-35	2156' FNL 683' FWL	SWNW Sec. 35 T8S R23E

Air Drilling Operations:

1. Main Air Compressors are 1250 CFM 350 psi with 2000 psi Boosters and are rig mounted.
2. Secondary Air Compressors are 1170 CFM 350 psi with 2000 psi Boosters and are rig mounted.
3. Minimum setting depth of conductor casing will be 60' GL or 10'± into competent formation, whichever is deeper, as determined by the EOG person in charge. Exceptions must be approved by an EOG drilling superintendent or manager.
4. The diameter of the diverter flow line will be a minimum of 10" to help reduce back pressure on the well bore during uncontrolled flow.
5. Rat and Mouse hole drilling will occur only after surface casing has been set and cemented.
6. EOG Resources, Inc. will use a properly maintained and lubricated stripper head.

VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 1

Onshore Oil and Gas Order No. 2 – Section E: Special Drilling Operations

1. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line to be 100' in length. (Where possible, a straight run blooie line will be used).
2. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be approximately 75' in length.
3. EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring dedusting equipment. Dust during air drilling operations is controlled by water mist.
4. EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring an automatic igniter or continuous pilot light on the blooie line. (Not required on aerated water system).
5. EOG Resources, Inc. requests a variance that compressors are located in the opposite direction from the blooie line a minimum of 100 feet from the well bore. (Air Compressors are rig mounted).

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:

UTU-76042

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL GAS WELL OTHER _____

8. WELL NAME and NUMBER:

Hoss 52-29

2. NAME OF OPERATOR:
EOG RESOURCES, INC.

9. API NUMBER:
43-047-38900

3. ADDRESS OF OPERATOR:
1060 East Highway 40 CITY VERNAL STATE UT ZIP 84078

PHONE NUMBER:
(435) 789-0790

10. FIELD AND POOL, OR WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 815 FNL & 812 FWL 40.098711 LAT 109.357494 LON

COUNTY: UINTAH

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWNW 29 8S 23E S.L.B. & M

STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION REQUEST</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.


Approved by the
Utah Division of
Oil, Gas and Mining

Date: 12-01-08
By: 

NAME (PLEASE PRINT) Mickenzie Thacker

TITLE Operations Clerk

SIGNATURE



DATE 11/24/2008

(This space for State use only)

COPY SENT TO OPERATOR

Date: 12-4-2008

Initials: KS

(5/2000)

(See Instructions on Reverse Side)

RECEIVED

NOV 26 2008

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-38900
Well Name: Hoss 52-29
Location: 815 FNL & 812 FWL (NWNW), SECTION 29, T8S, R23E S.L.B.&M
Company Permit Issued to: EOG Resources, Inc.
Date Original Permit Issued: 12/20/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Mildemis Thayer
Signature

11/24/2008
Date

Title: Operations Clerk

Representing: EOG Resources, Inc.

RECEIVED

NOV 26 2008

DIV. OF OIL, GAS & MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Green River District-Vernal Field Office
170 South 500 East
Vernal, UT 84078
(435) 781-4400 Fax: (435) 781-4410
<http://www.blm.gov/ut/st/en/fo/vernal.html>

IN REPLY REFER TO:
3160
UTG011

July 8, 2009

Kaylene R. Gardner
EOG Resources, Inc.
1060 East Highway 40
Vernal, UT 84078

43 047 38900
Re: Notice of Expiration
Well No. Hoss 52-29
NWNW, Sec. 29, T8S, R23E
Uintah County, Utah
Lease No. UTU-76042

Dear Ms. Gardner:

The Application for Permit to Drill (APD) for the above-referenced well was approved on March 28, 2007. A one (1) year extension of the original APD was requested. The request was reviewed and the extension approved until March 28, 2009. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

If you have any questions regarding this matter, please contact me at (435) 781-4455.

Sincerely,

Cindy Severson

Cindy Severson
Land Law Examiner

cc: UDOGM

RECEIVED
JUL 13 2009
DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

December 8, 2009

Mickenzie Gates
EOG Resources Inc.
1060 East Highway 40
Vernal, Utah 84078

Re: APD Rescinded – HOSS 52-29, Sec. 29, T. 8S, R. 23E
Uintah County, Utah API No. 43-047-38900

Dear Ms. Gates:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on December 20, 2006. On December 24, 2007 and December 1, 2008 the Division granted a one-year APD extension. On December 2, 2009, you requested that the division rescind the state approved APD. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective December 2, 2009.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

