

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL				5. MINERAL LEASE NO: ML-10755	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>				8. UNIT or CA AGREEMENT NAME: UNIT #891008900A	
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE L.P.				9. WELL NAME and NUMBER: NBU 1021-16D	
3. ADDRESS OF OPERATOR: 1368 S 1200 E CITY VERNAL STATE UT ZIP 84078			PHONE NUMBER: (435) 781-7024	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 666'FNL, 666'FWL AT PROPOSED PRODUCING ZONE:				11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWNW 16 10S 21E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 19.8 MILES SOUTH OF OURAY, UTAH				12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 666'		16. NUMBER OF ACRES IN LEASE: 640.00		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40.00	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) REFER TO TOPO C		19. PROPOSED DEPTH: 9,570		20. BOND DESCRIPTION: RLB0005237	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5124'GL		22. APPROXIMATE DATE WORK WILL START:		23. ESTIMATED DURATION:	

24. **PROPOSED CASING AND CEMENTING PROGRAM**


SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
12 1/4"	9 5/8	32.3#	H-40	2,100	265 SX CLASS G	1.18 YIELD	15.6 PPG
7 7/8"	4 1/2	11.6#	I-80	9,570	2000 SX CLASS G	1.31 YIELD	14.3 PPG

25. **ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER


NAME (PLEASE PRINT) SHEILA UPCHEGO TITLE SENIOR LAND ADMIN SPECIALIST

SIGNATURE  DATE 2/23/2007

(This space for State use only)

API NUMBER ASSIGNED: 43-047-39109

**Approved by the
Utah Division of
Oil, Gas and Mining**

APPROVAL: 

Date: 04-24-07
(See Instructions on Reverse Side)

By: _____

RECEIVED
MAR 16 2007

DIV. OF OIL, GAS & MINING

T10S, R21E, S.L.B.&M.

1977 Brass Cap,
Pile of Stones

S89°20'27"W - 2662.72' (Meas.)

N89°19'E - 2643.96' (G.L.O.)

1977 Brass Cap,
0.1' High, Pile of
Stones, Post

N00°17'20"W - 2665.47' (Meas.)

NBU #1021-16D
Elev. Ungraded Ground = 5124'

N00°18'58"W - 2666.22' (Meas.)

1977 Brass Cap,
0.5' High, Pile of
Stones

16

N00°10'W - 5347.32' (G.L.O.)

1977 Brass Cap,
0.5' High, Pile of
Stones

S89°28'W - 5310.36' (G.L.O.)

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.


(NAD 83)
 LATITUDE = 39°57'12.14" (39.953372)
 LONGITUDE = 109°33'50.47" (109.564019)
 (NAD 27)
 LATITUDE = 39°57'12.27" (39.953408)
 LONGITUDE = 109°33'47.99" (109.563331)

Kerr McGee Oil & Gas Onshore LP

Well location, NBU #1021-16D, located as shown in the NW 1/4 NW 1/4 of Section 16, T10S, R21E, S.L.B.&M., Uintah County, Utah.


BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

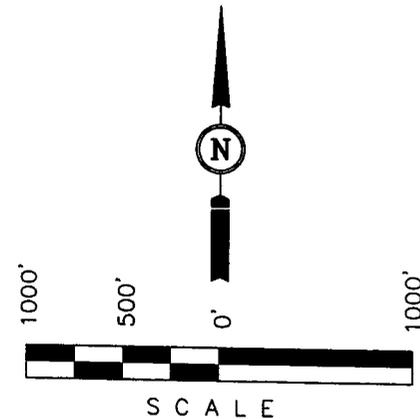

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLANNED FROM FIELD NOTES OF ACTUAL SURVEYS MADE UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 1-2-07	DATE DRAWN: 1-4-07
PARTY G.S. R.W. K.G.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE Kerr McGee Oil & Gas Onshore LP	

NBU 1021-16D
NW/NW SEC. 16, T10S, R21E
UINTAH COUNTY, UTAH
ML-10755

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. **Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1259'
Top of Birds Nest Water	1486'
Mahogany	2081'
Wasatch	4483'
Mesaverde	7382'
MVU2	8372'
MVL1	8903'
TD	9570'

2. **Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Water	Green River	1259'
	Top of Birds Nest Water	1486'
	Mahogany	2081'
Gas	Wasatch	4483'
Gas	Mesaverde	7382'
Gas	MVU2	8372'
Gas	MVL1	8903'
Water	N/A	
Other Minerals	N/A	

3. **Pressure Control Equipment** (Schematic Attached)

Please refer to the attached Drilling Program.

4. **Proposed Casing & Cementing Program:**

Please refer to the attached Drilling Program.

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Program.

6. **Evaluation Program:**

Please refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 9570' TD, approximately equals 5933 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3828 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variations:**

Please refer to the attached Drilling Program.

10. **Other Information:**

Please refer to the attached Drilling Program.



KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE February 23, 2007
 WELL NAME NBU 1021-16D TD 9,570' MD/TVD
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,124' GL KB 5,139'
 SURFACE LOCATION NW/NW SEC. 16, T10S, R21E 666'FNL, 666'FWL BHL Straight Hole
 Latitude: 39.953372 Longitude: 109.564019
 OBJECTIVE ZONE(S) Wasatch/Mesaverde
 ADDITIONAL INFO Regulatory Agencies: UDOGM (SURF & MINERALS), BLM, Tri-County Health Dept.

GEOLOGICAL FORMATION			MECHANICAL		
LOGS	TOPS	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 32.3#, H-40, STC	Air mist
Catch water sample, if possible, from 0 to 4,483' Green River @ 1,259' Top of Birds Nest Water @ 1486' Mahogany @ 2,081' Preset f/ GL @ 2,100' MD					
Note: 12.25" surface hole will usually be drilled ±400' below the bottom of lost circulation zone. Drilled depth may be ±200' of the estimated set depth depending on the actual depth of the loss zone.					
Mud logging program TBD Open hole logging program f/ TD - surf csg					
	Wasatch @	4,483'			
	Mverde @	7,382'			
	MVU2 @	8,372'			
	MVL1 @	8,903'			
			7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	Water/Fresh Water Mud 8.3-11.5 ppg
					Max anticipated Mud required 11.5 ppg
		TD @ 9,570'			



KERR-McGEE OIL & GAS ONSHORE LP DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 2100	32.30	H-40	STC	0.63*****	1.39	4.28
PRODUCTION	4-1/2"	0 to 9570	11.60	I-80	LTC	2.15	1.11	2.07

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point)-(0.22 psi/ft-partial evac gradient x TVD of next csg point)
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
 (Burst Assumptions: TD = 11.5 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
 MASP 3617 psi

***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE Option 1	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE Option 2	LEAD	1500	NOTE: If well will circulate water to surface, option 2 will be utilized Prem cmt + 16% Gel + 10 pps gilsonite +.25 pps flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,980'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	440	60%	11.00	3.38
	TAIL	5,590'	50/50 Poz/G + 10% salt + 2% gel +.1% R-3	1560	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained
 *Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.
 BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.
 Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.
 Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.


DRILLING ENGINEER: _____
 Brad Laney

DATE: _____

DRILLING SUPERINTENDENT: _____
 Randy Bayne NBU1021-16D DHD.xls

DATE: _____

5M BOP STACK and CHOKE MANIFOLD SYSTEM

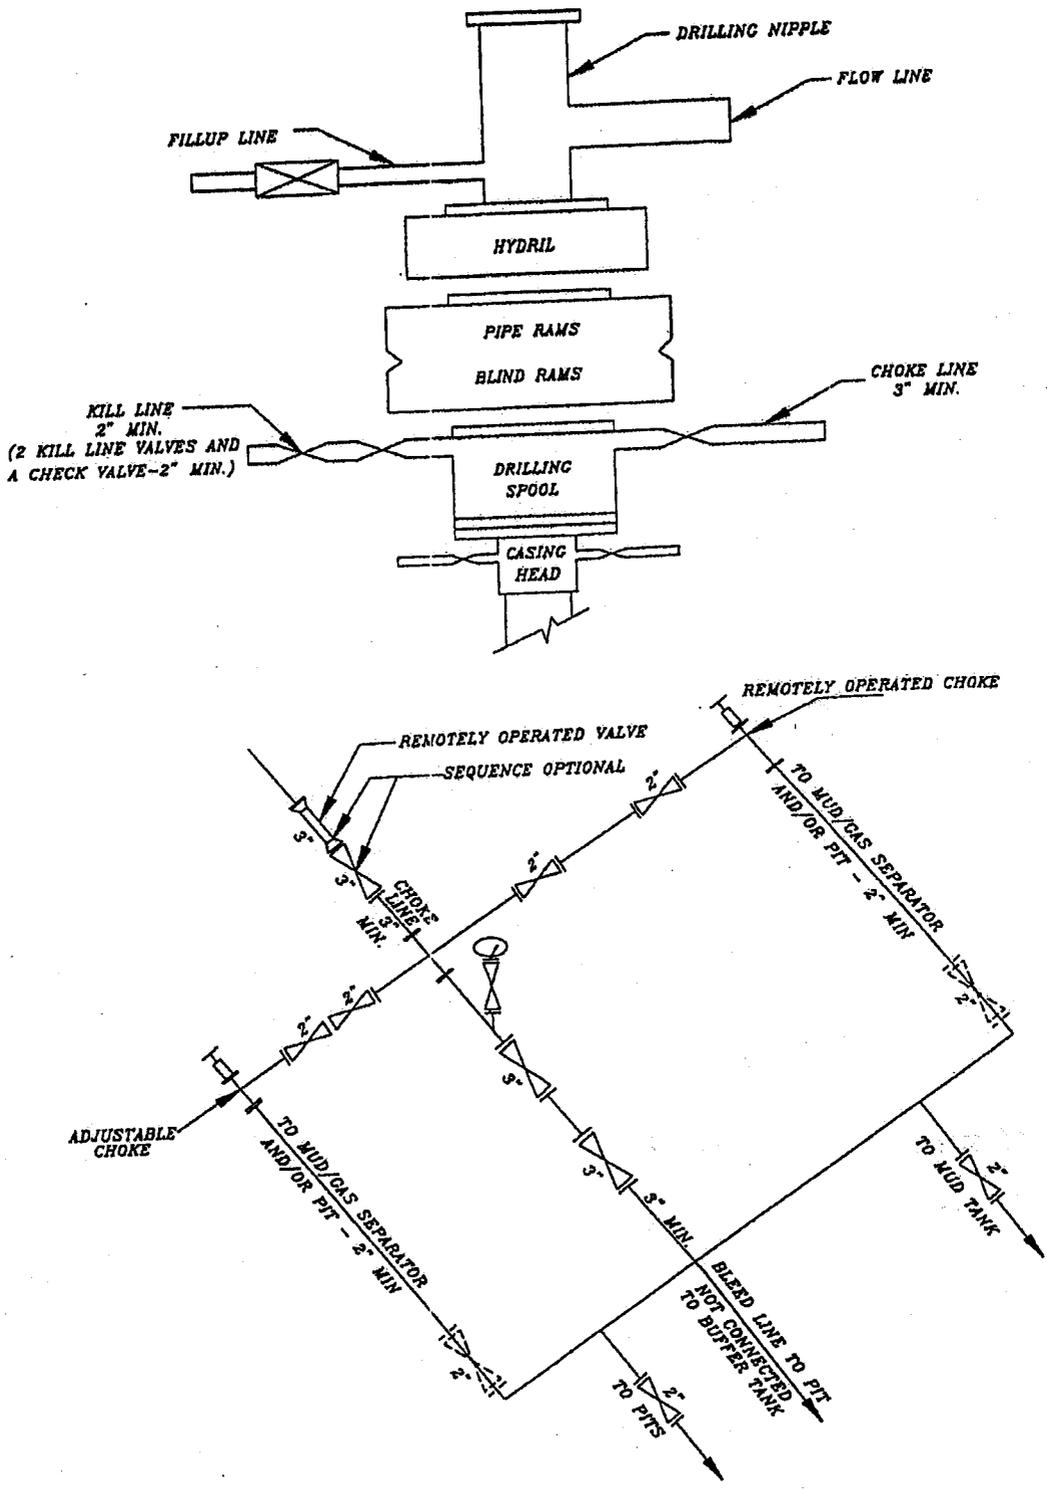

NBU 1021-16D
NW/NW SEC. 16, T10S, R21E
Uintah County, UT
ML-10755

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

Refer to Topo Maps A and B for location of access roads within a 2 mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

Approximately 0.1 +/- miles of new access road is proposed. Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities were determined at the on-site.

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain

fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon, standard color number 2.5Y 6/2.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 1360' +/- of 4" steel pipeline is proposed. Please refer to the attached Topo Map D for pipeline placement.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner and felt will be used, it will be a minimum of 20 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

8. Ancillary Facilities:

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance

between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to current rig availability. If the proposed location is not large enough to accommodate the drilling rig the location will be re-surveyed and a Form 9 shall be submitted.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

A plastic, nylon reinforced liner will be used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. **Surface Ownership:**

SITLA
675 East 500 South, Suite 500
Salt Lake City, UT 84102

12. **Other Information:**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey will be submitted when report becomes available.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the Unit.

13. **Lessee's or Operators's Representative & Certification:**

Sheila Upchego
Senior Land Admin Specialist
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East.
Vernal, UT 84078
(435) 781-7024

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by State Surety Bond #RLB0005237.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Sheila Upchego

2/26/2007

Date

Kerr-McGee Oil & Gas Onshore LP
NBU #1021-16D
SECTION 16, T10S, R21E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION ALONG THE SEEP RIDGE ROAD APPROXIMATELY 11.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 3.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY, THEN NORTHERLY, THEN NORTHEASTERLY, THEN NORTHWESTERLY, THEN NORTHERLY DIRECTION APPROXIMATELY 1.0 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE WEST; FOLLOW ROAD FLAGS IN A WESTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 47.2 MILES.

Kerr-McGee Oil & Gas Onshore LP

NBU #1021-16D

LOCATED IN UINTAH COUNTY, UTAH
SECTION 16, T10S, R21E, S.L.B.&M.

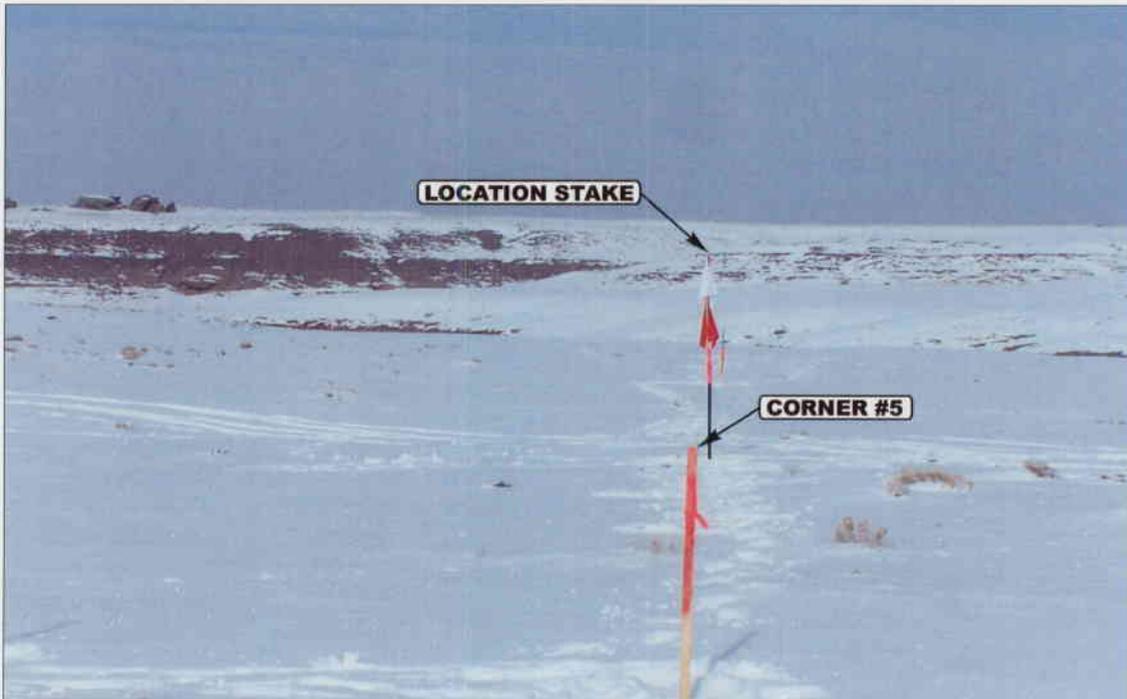


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: WESTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


01 02 07
MONTH DAY YEAR

PHOTO

TAKEN BY: G.S.

DRAWN BY: L.K.

REVISED: 00-00-00

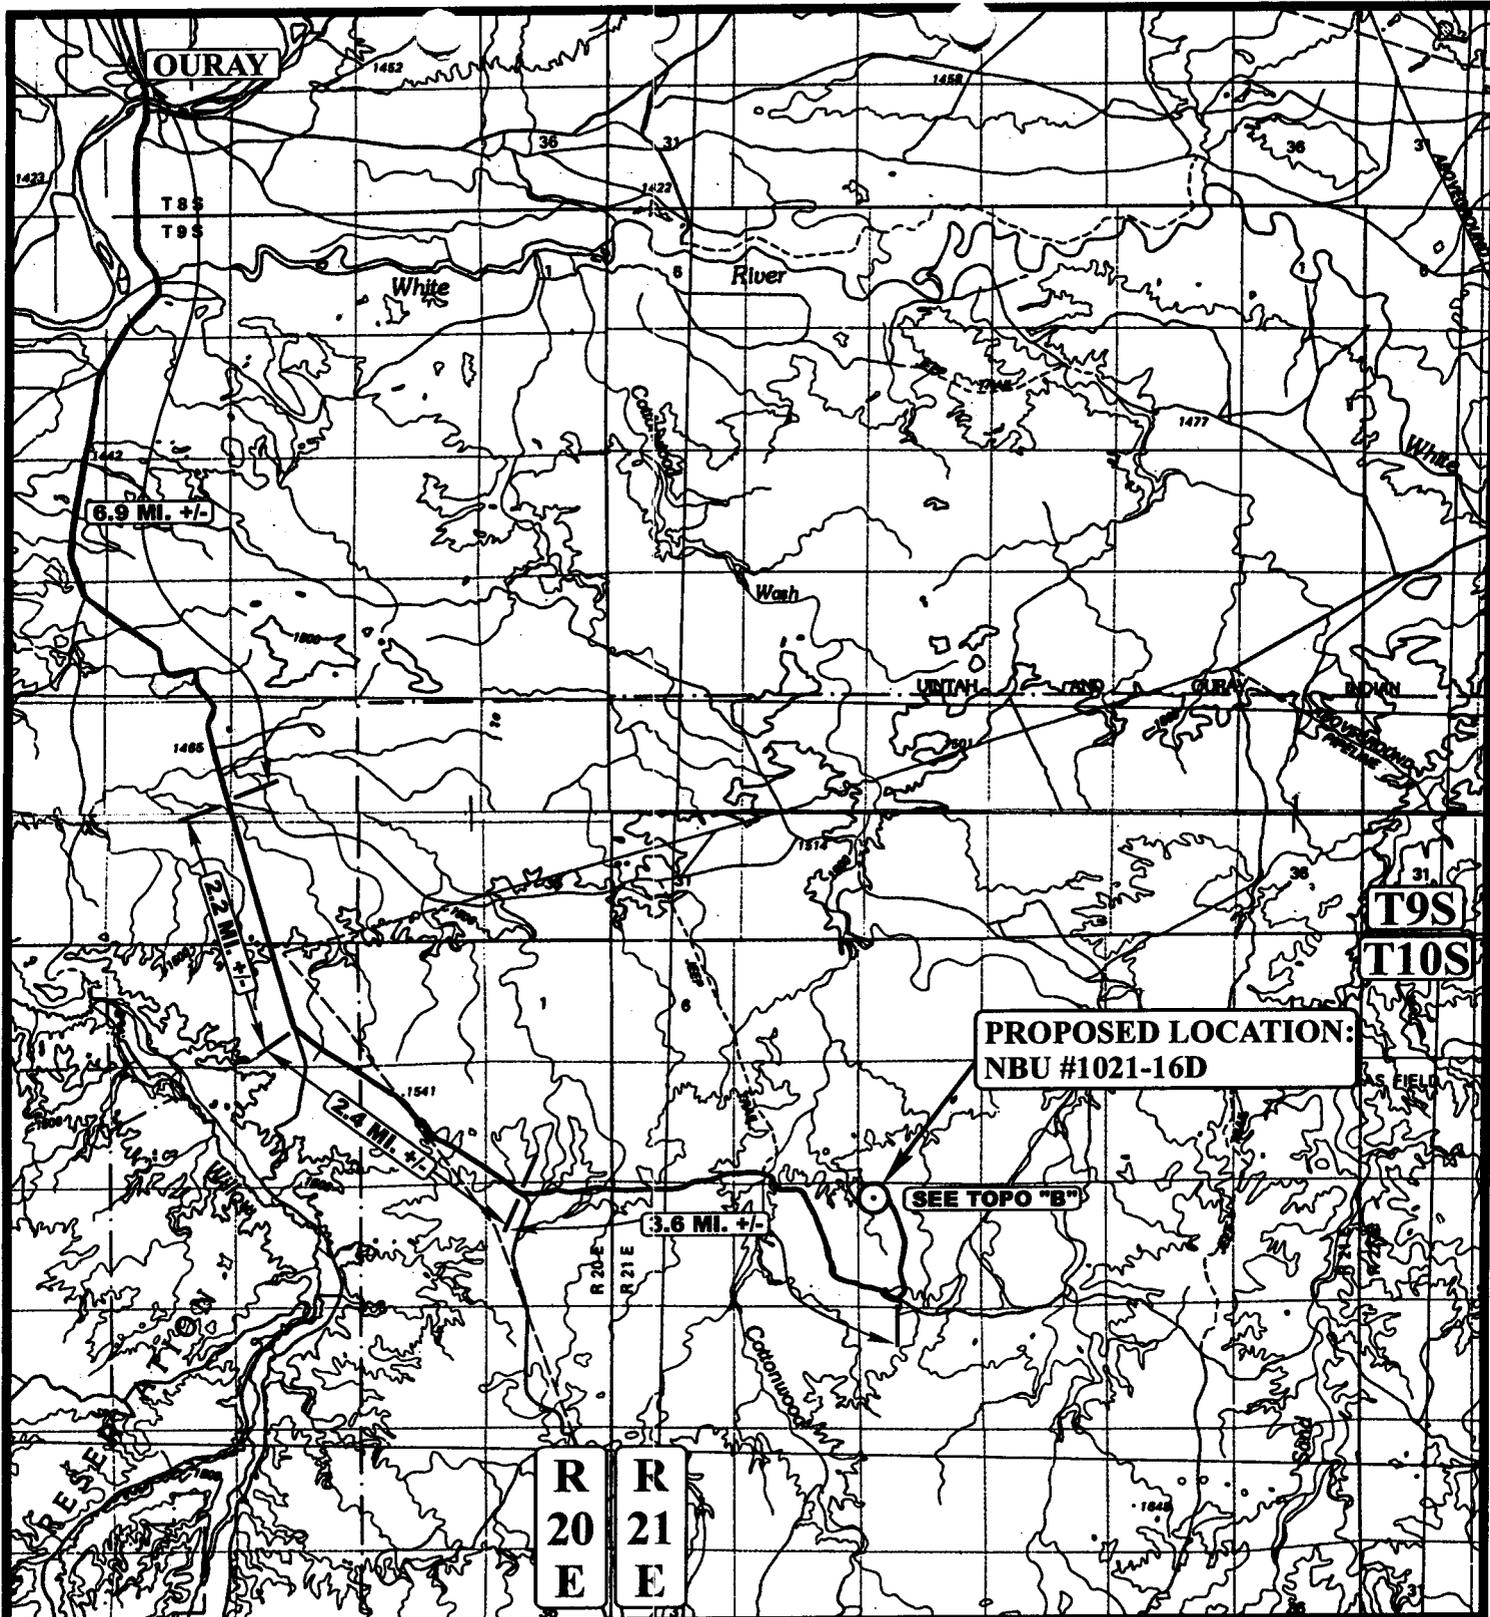

**PROPOSED LOCATION:
NBU #1021-16D**

SEE TOPO "B"

**R
20
E** **R
21
E**

LEGEND:

○ PROPOSED LOCATION



Kerr-McGee Oil & Gas Onshore LP


**NBU #1021-16D
SECTION 16, T10S, R21E, S.L.B.&M.
666' FNL 666' FWL**

U E L S **Uintah Engineering & Land Surveying**
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC **01** **02** **07**
MAP **MONTH** **DAY** **YEAR**
SCALE: 1:100,000 **DRAWN BY: L.K.** **REVISED: 00-00-00**

A
TOPO

R
21
E

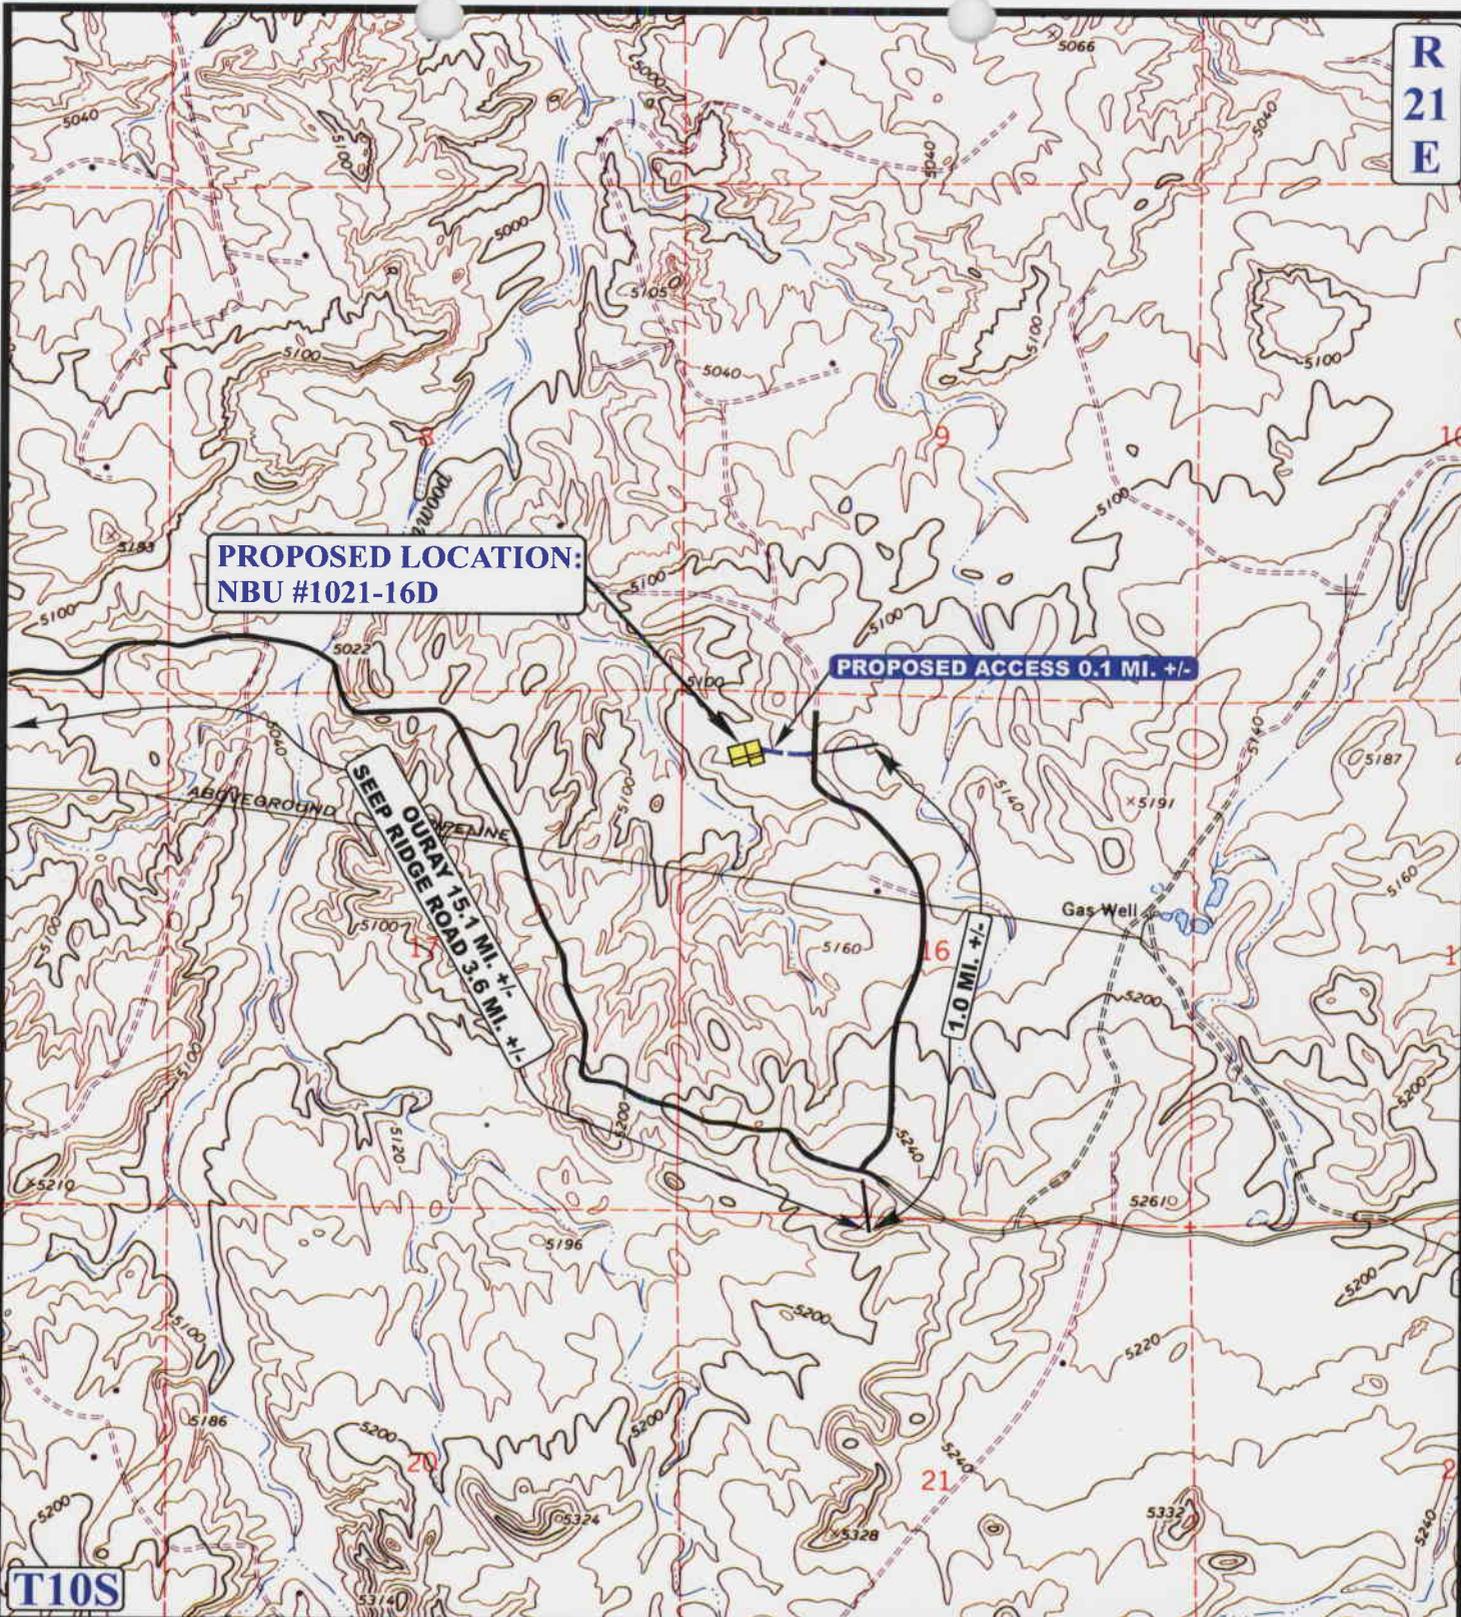

**PROPOSED LOCATION:
NBU #1021-16D**

PROPOSED ACCESS 0.1 MI. +/-

SEP RIDGE ROAD 3.6 MI. +/-

ABOVEGROUND PIPELINE 15.1 MI. +/-

1.0 MI. +/-

Gas Well

T10S

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD


Kerr-McGee Oil & Gas Onshore LP

**NBU #1021-16D
SECTION 16, T10S, R21E, S.L.B.&M.
666' FNL 666' FWL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP	01	02	07	B TOPO
	MONTH	DAY	YEAR	
SCALE: 1" = 2000'		DRAWN BY: L.K.		REVISED: 00-00-00

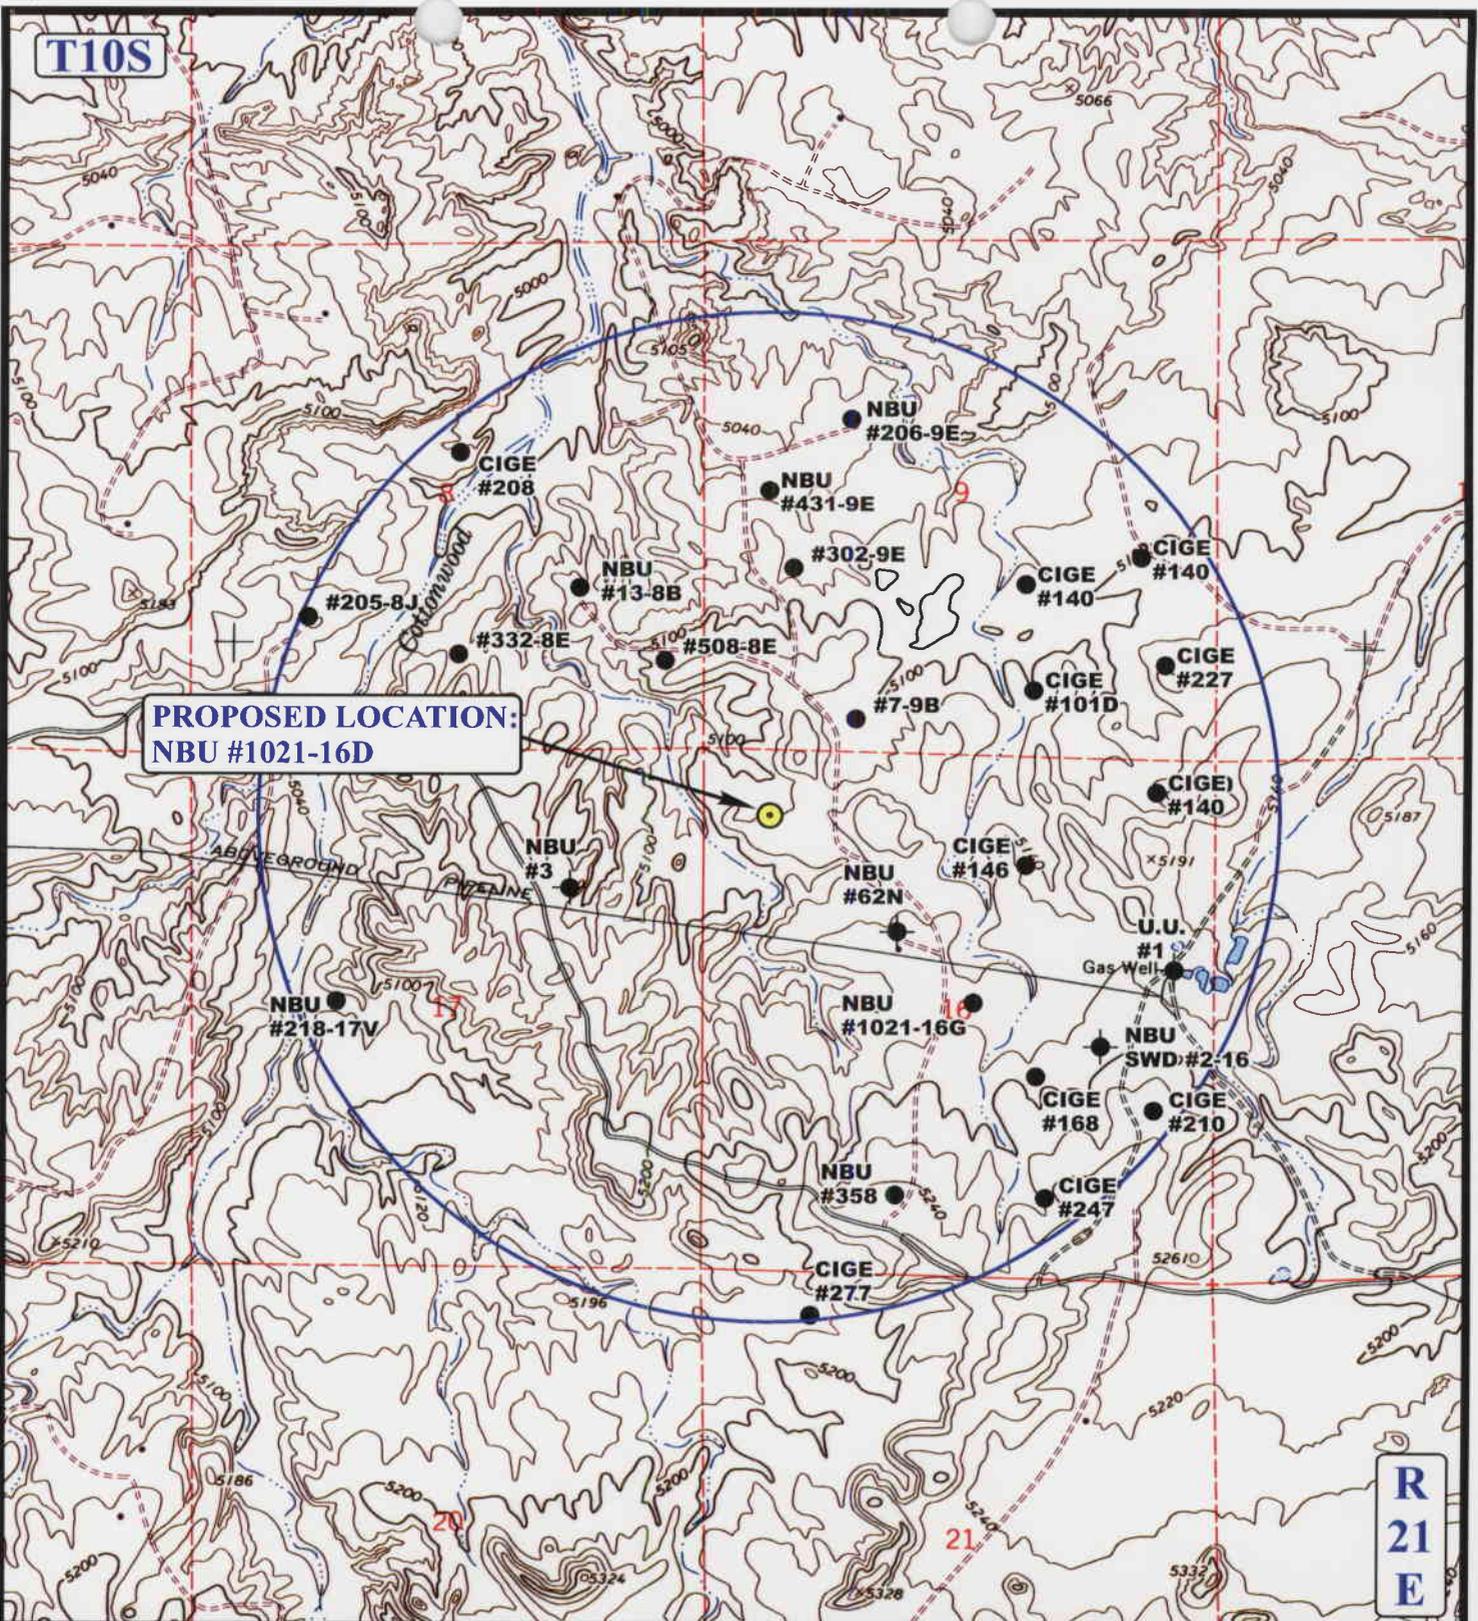

**PROPOSED LOCATION:
NBU #1021-16D**

LEGEND:

- ∅ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊕ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED


Kerr-McGee Oil & Gas Onshore LP

**NBU #1021-16D
SECTION 16, T10S, R21E, S.L.B.&M.
666' FNL 666' FWL**

UEIS
Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP **01 02 07**
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00 **C TOPO**

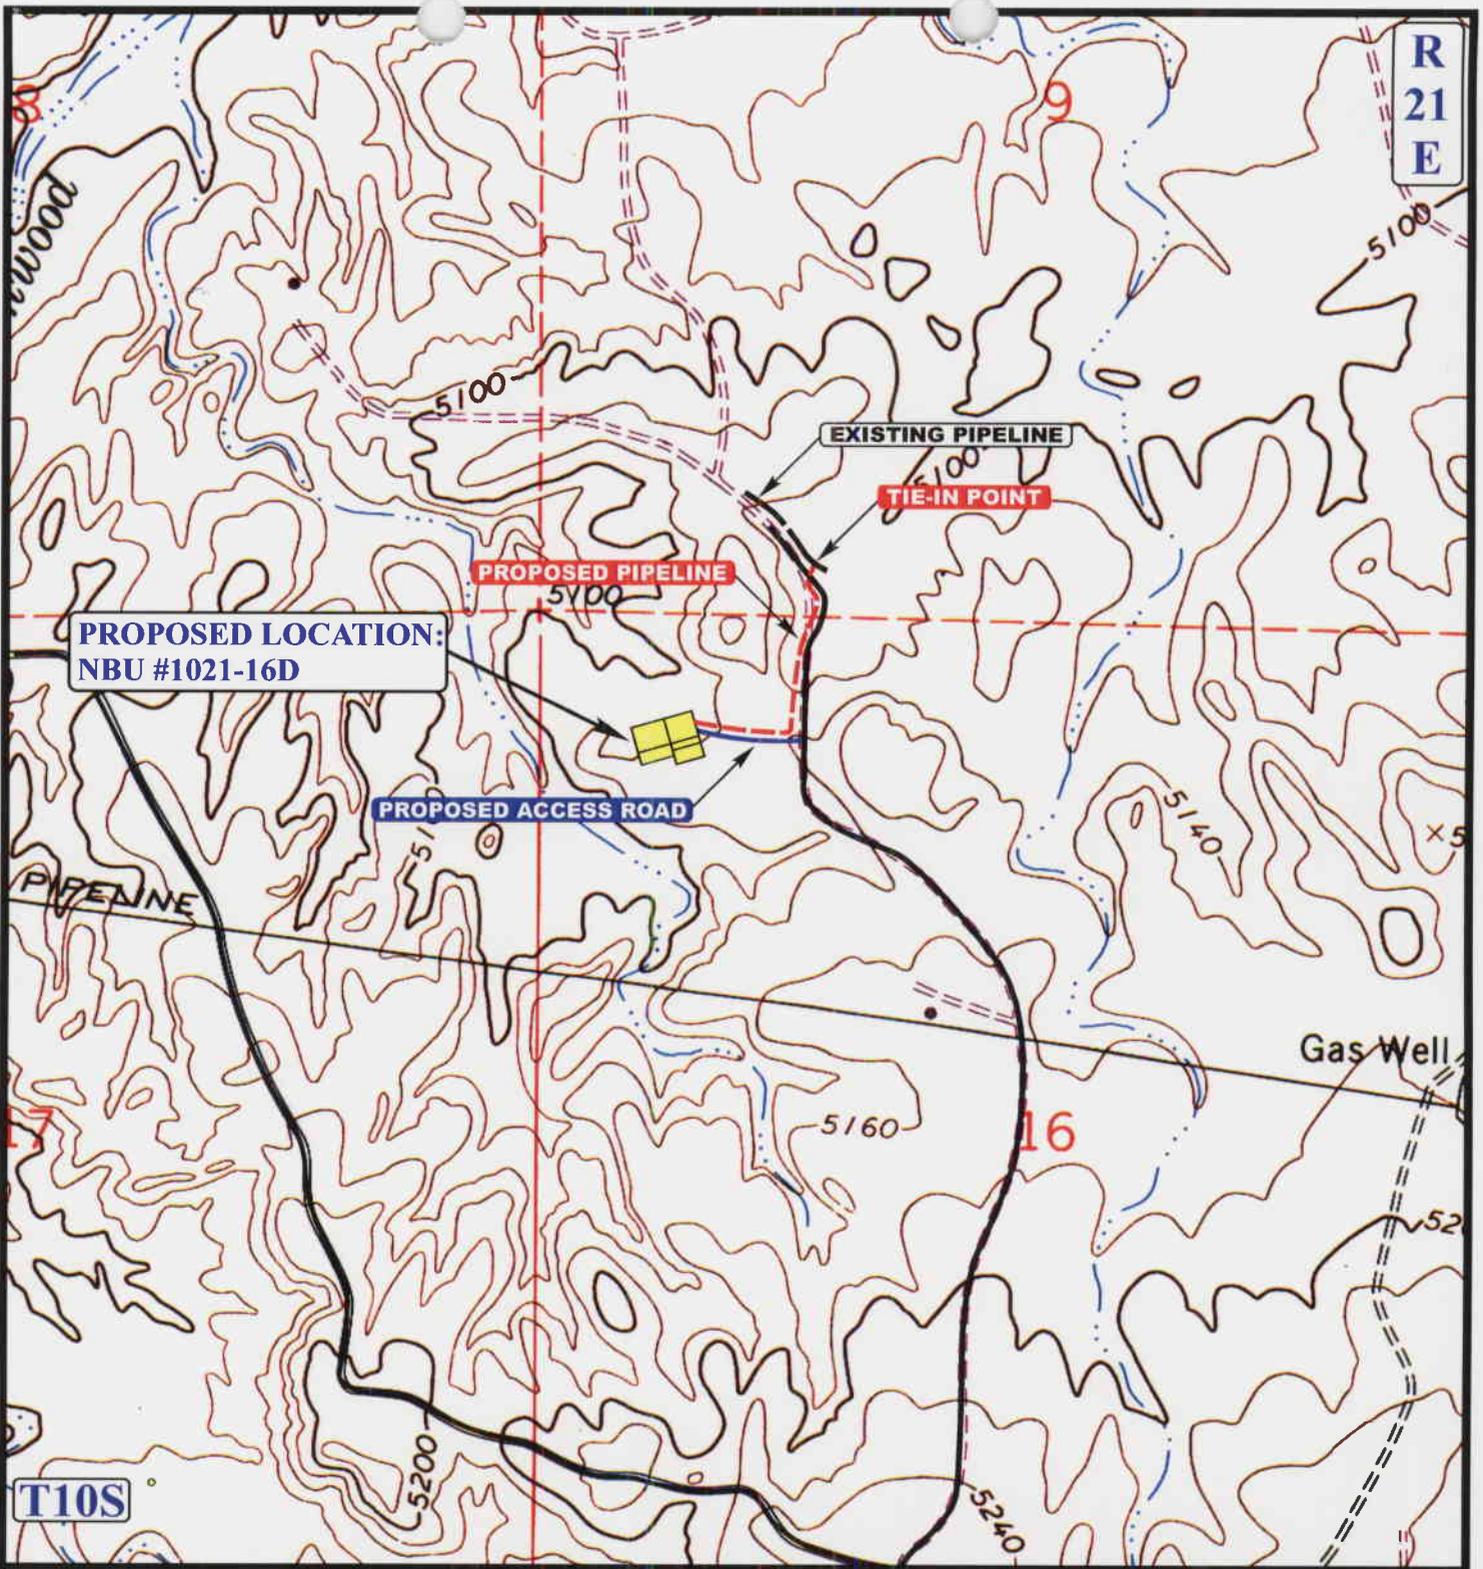

APPROXIMATE TOTAL PIPELINE DISTANCE = 1,360' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- - - - EXISTING PIPELINE
- - - - PROPOSED PIPELINE
- - - - PROPOSED PIPELINE (SERVICING OTHER WELLS)



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



Kerr-McGee Oil & Gas Onshore LP

NBU #1021-16D
SECTION 16, T10S, R21E, S.L.B.&M.
666' FNL 666' FWL

TOPOGRAPHIC 01 02 07
MAP MONTH DAY YEAR
 SCALE: 1" = 1000' DRAWN BY: L.K. REVISED: 00-00-00



Kerr-McGee Oil & Gas Onshore LP

NBU #1021-16D

PIPELINE ALIGNMENT

LOCATED IN UINTAH COUNTY, UTAH
SECTION 16, T10S, R21E, S.L.B.&M.



PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: SOUTHERLY



PHOTO: VIEW FROM TIE-IN POINT

CAMERA ANGLE: NORTHEASTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

01 02 07
MONTH DAY YEAR

PHOTO

TAKEN BY: G.S.

DRAWN BY: L.K.

REVISED: 00-00-00

Kerr-McGee Oil & Gas Onshore LP

FIGURE #2

TYPICAL CROSS SECTIONS FOR


NBU #1021-16D

SECTION 16, T10S, R21E, S.L.B.&M.

666' FNL 666' FWL

1" = 20'
X-Section
Scale
1" = 50'

DATE: 1-4-07
Drawn By: K.G.

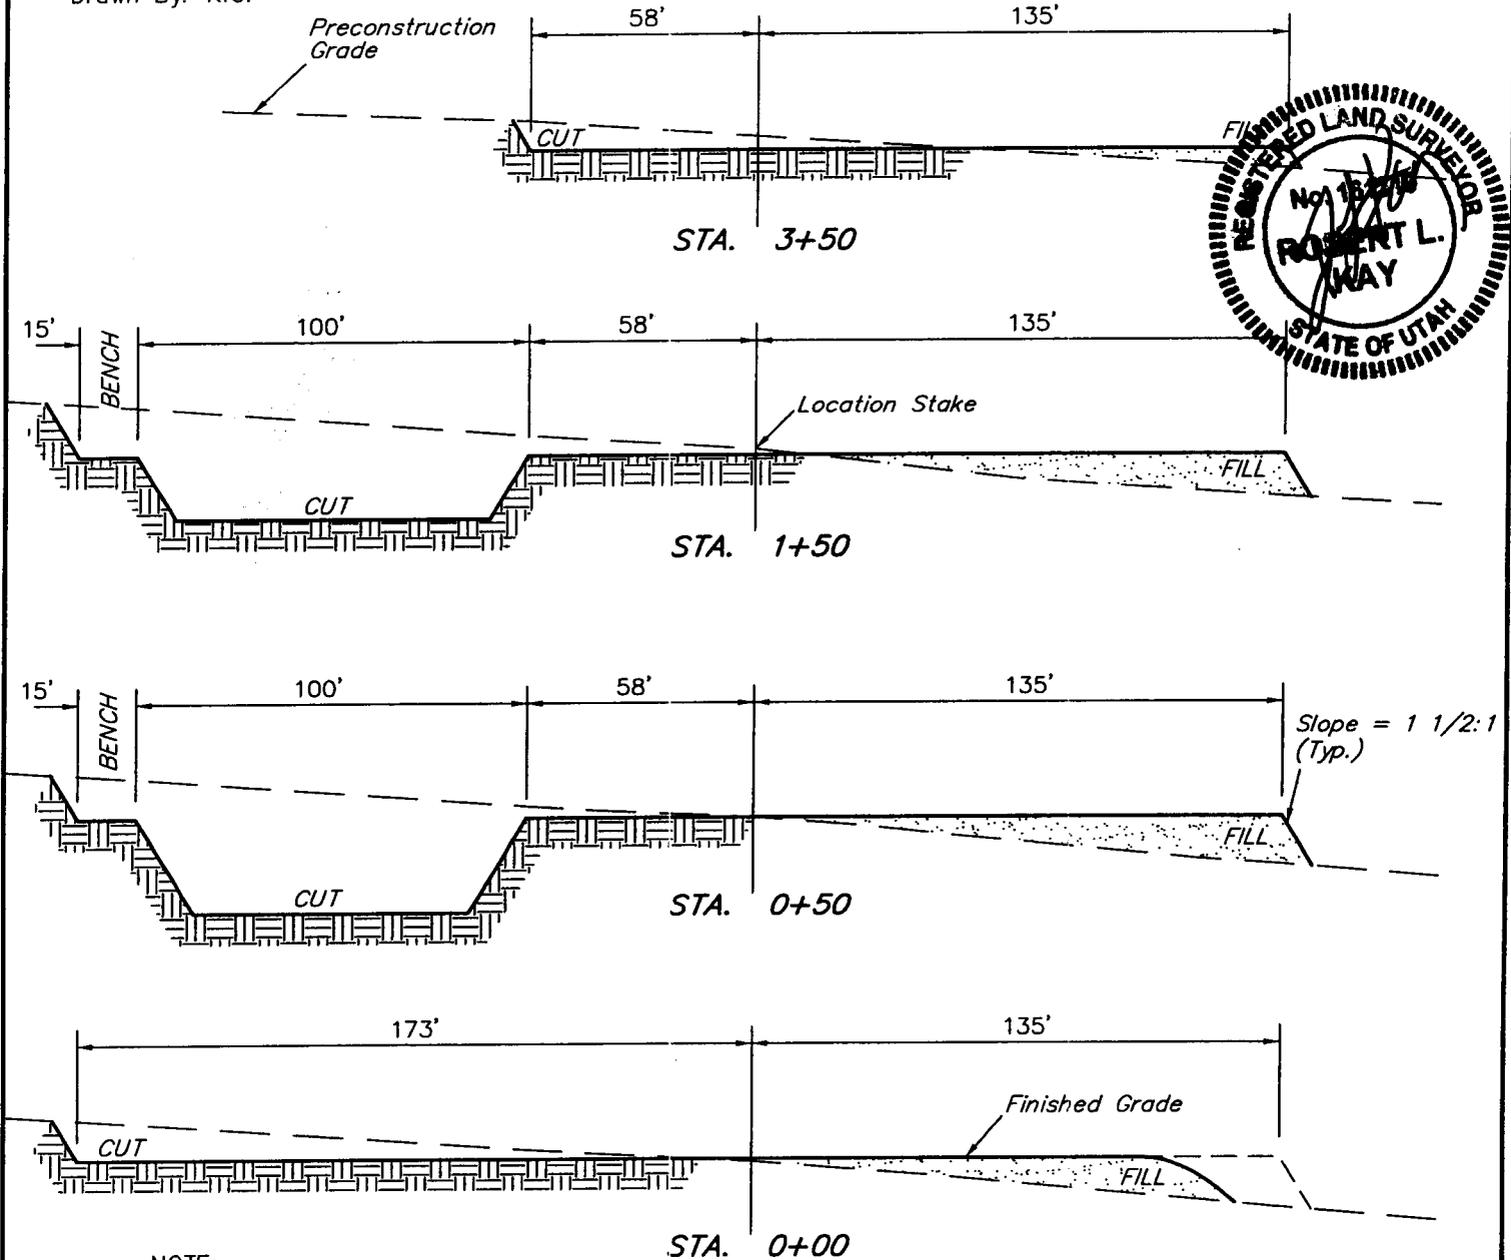

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

*** NOTE:**

FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT

(6") Topsoil Stripping = 1,790 Cu. Yds.
Remaining Location = 7,270 Cu. Yds.

TOTAL CUT = 9,060 CU.YDS.

FILL = 4,610 CU.YDS.

EXCESS MATERIAL = 4,450 Cu. Yds.

Topsoil & Pit Backfill = 3,930 Cu. Yds.
(1/2 Pit Vol.)

EXCESS UNBALANCE = 520 Cu. Yds.
(After Interim Rehabilitation)

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 03/16/2007

API NO. ASSIGNED: 43-047-39109

WELL NAME: NBU 1021-16D
 OPERATOR: KERR-MCGEE OIL & GAS (N2995)
 CONTACT: SHEILA UPCHEGO

PHONE NUMBER: 435-781-7024

PROPOSED LOCATION:

NWNW 16 100S 210E
 SURFACE: 0666 FNL 0666 FWL
 BOTTOM: 0666 FNL 0666 FWL
 COUNTY: UINTAH
 LATITUDE: 39.95336 LONGITUDE: -109.5633
 UTM SURF EASTINGS: 622723 NORTHINGS: 4423359
 FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DUD	4/23/07
Geology		
Surface		

LEASE TYPE: 3 - State
 LEASE NUMBER: ML-10755
 SURFACE OWNER: 3 - State

PROPOSED FORMATION: WSMVD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. 22013542)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:


- R649-2-3.
- Unit: NATURAL BUTTES
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 173-14
Eff Date: 12-2-99
Siting: 460' from bdr & 920' from m-trail
- R649-3-11. Directional Drill

COMMENTS:

Need Permits (04-04-07)

STIPULATIONS:

- 1- STATEMENT OF BASIS
- 2- OIL SHALE
- 3- Surface Csg Cont Step

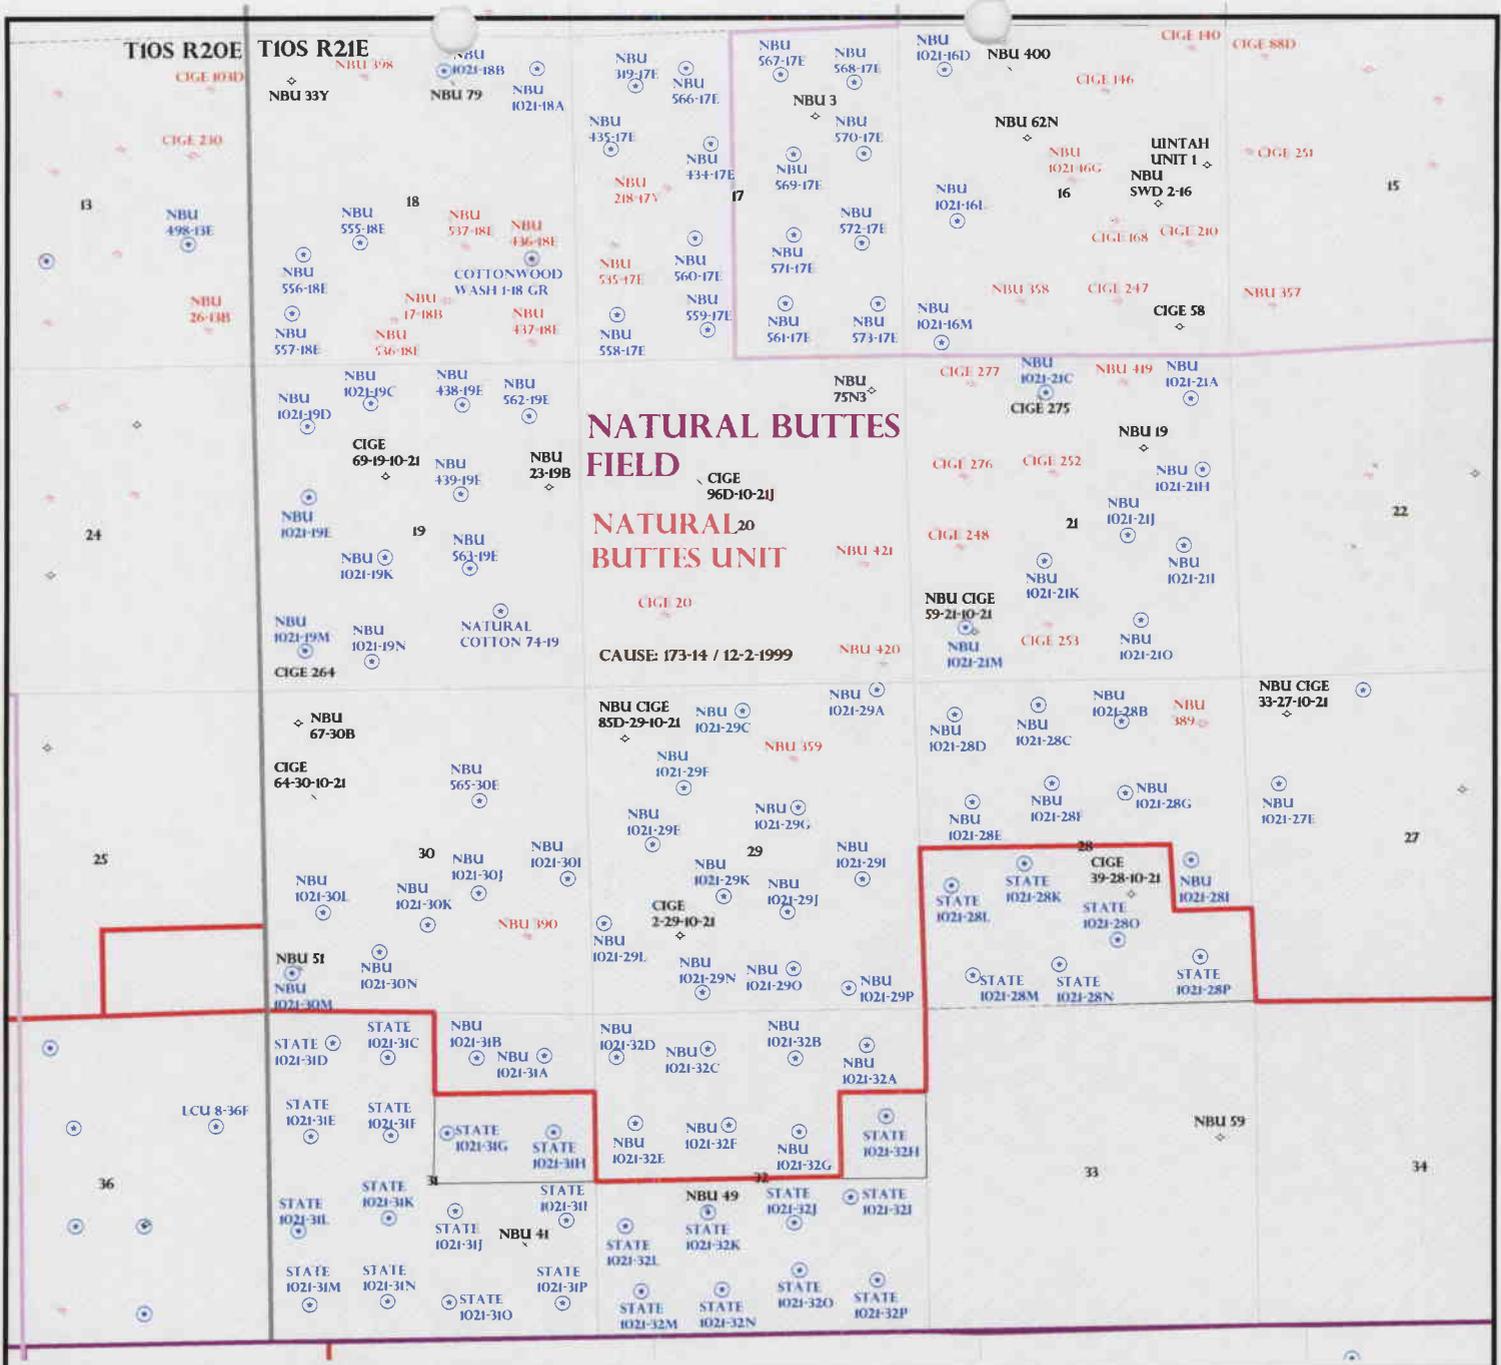

OPERATOR: KERR MCGEE O&G (N9550)

SEC: 16,28,29,31,32 T.10S R. 21E

FIELD: NATURAL BUTTES (630)


COUNTY: UINTAH

CAUSE: 173-14 / 12-2-1999

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- GAS INJECTION
 - GAS STORAGE
 - LOCATION ABANDONED
 - NEW LOCATION
 - PLUGGED & ABANDONED
 - PRODUCING GAS
 - PRODUCING OIL
 - SHUT-IN GAS
 - SHUT-IN OIL
 - TEMP. ABANDONED
 - TEST WELL
 - WATER INJECTION
 - WATER SUPPLY
 - WATER DISPOSAL
 - DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
DATE: 23-MARCH-2007

Application for Permit to Drill

Statement of Basis

4/18/2007

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Ownr	CBM
309	43-047-39109-00-00		GW	S	No
Operator	KERR-MCGEE OIL & GAS ONSHORE, LP		Surface Owner-APD		
Well Name	NBU 1021-16D		Unit		
Field	UNDESIGNATED		Type of Work		
Location	NWNW 16 10S 21E S 666 FNL 666 FWL GPS Coord (UTM) 622723E 4423359N				

Geologic Statement of Basis

Kerr McGee proposes to set 2,100' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 5,100'. A search of Division of Water Rights records shows one water well within a 10,000 foot radius of the center of Section 16. The well is located .75 miles east of the proposed location. The well is owned by Target Trucking and is used for oil well drilling fluid. No depth is listed. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. Production casing cement should be brought up above the base of the moderately saline ground water to isolate it from fresher waters uphole.

Brad Hill
APD Evaluator

4/18/2007
Date / Time

Surface Statement of Basis

The general area is within the Natural Buttes Unit of the Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 8 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 20 miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within approximately 0.1 miles of the site, which will require new construction.

The proposed location is on a gentle north sloping flat with draws to the north and south. A knoll to the north has exposed sandstone outcrops. No drainage problems exist on the proposed location.

Both the surface and minerals are owned by SITLA. Jim Davis represented SITLA at the pre-site investigation. Mr. Davis had no concerns pertaining to this location. The selected location appears to be the best site for drilling and operating a well in the immediate area.

Floyd Bartlett
Onsite Evaluator

4/4/2007
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.

ON-SITE PREDRILL EVALUATION
Utah Division of Oil, Gas and Mining

Operator KERR-MCGEE OIL & GAS ONSHORE, LP
Well Name NBU 1021-16D
API Number 43-047-39109-0 **APD No** 309 **Field/Unit** UNDESIGNATED
Location: 1/4,1/4 NWNW **Sec** 16 **Tw** 10S **Rng** 21E 666 FNL 666 FWL
GPS Coord (UTM) 622724 4423367 **Surface Owner**

Participants

Floyd Bartlett (DOGM), Jim Davis (SITLA), Carroll Estes, Tony Keznic, David Kay (Uintah Engineering and Land Surveying).

Regional/Local Setting & Topography

The general area is within the Natural Buttes Unit of the Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 8 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 20 miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within approximately 0.1 miles of the site, which will require new construction.

The proposed location is on a gentle north sloping flat with draws to the north and south. A knoll to the north has exposed sandstone outcrops. No drainage problems exist on the proposed location.

Both the surface and minerals are owned by SITLA.

Surface Use Plan

Current Surface Use

Grazing
Recreational
Wildlfe Habitat

New Road

Miles	Well Pad	Src Const Material	Surface Formation
0.2	Width 278 Length 350	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate? Y

Environmental Parameters

Affected Floodplains and/or Wetland N

Flora / Fauna

Vegetation is a desert shrub type . A fair cover of Gardner saltbrush, globe mallow, prickly pear, bud sage and shadscale exists. Other plants are spring annuals.

Antelope, cattle, rabbits, coyotes, and small mammals, birds and raptors.

Soil Type and Characteristics

Moderately deep rocky sandy loam.. Rocks are small with angular surface rock.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required N

Berm Required? N

Erosion Sedimentation Control Required? N

Paleo Survey Run? Y **Paleo Potential Observed?** **Cultural Survey Run?** N **Cultural Resources?**

Reserve Pit

Site-Specific Factors		Site Ranking
Distance to Groundwater (feet)	>200	0
Distance to Surface Water (feet)	>1000	0
Dist. Nearest Municipal Well (ft)	>5280	0
Distance to Other Wells (feet)	300 to 1320	10
Native Soil Type	Mod permeability	10
Fluid Type	Fresh Water	5
Drill Cuttings	Normal Rock	0
Annual Precipitation (inches)	<10	0
Affected Populations	<10	0
Presence Nearby Utility Conduits	Not Present	0
Final Score		25
		1 Sensitivity Level

Characteristics / Requirements

The proposed reserve pit is 100' x 150' x 10' deep located in a cut on the southeast corner of the location. A 20 mil liner with a felt sub-liner is planned by Kerr McGee.

Closed Loop Mud Required? N **Liner Required?** Y **Liner Thickness** 16 **Pit Underlayment Required?** Y

Other Observations / Comments

Ben Williams representing the UDWR was not at the pre-site but stated the previous day that all the remaining locations in the area were classified as yearlong critical habitat for antelope. He stated that the lack of water not forage is the limiting factor affecting the herd in the area. He recommended no restrictions for antelope. No other wildlife is expected to be significantly affected. He gave Jim Davis of SITLA and Carroll Estes of Kerr McGee a copy of his wildlife evaluation and a UDWR recommended seed mix to be used when re-vegetating the locations.

ATV's were used to access the site.

Floyd Bartlett
Evaluator

4/4/2007
Date / Time

Casing Schematic

Surface

12%

18%

BHP $0.052(9570)11.5 = 5723 \text{ psi}$
anticipate - 5933 psi

Gas $.12(9570) = 1148$
 $5723 - 1148 = 4575 \text{ psi, MASP}$

BOPE 5M ✓

9-5/8"
MW 8.3
Frac 19.3

Burst 2270
70% 1589 psi

Max P @ surf. shoe

$.22(7470) = 1643$

$5723 - 1643 = 4080 \text{ psi}$

Max allowed pressure @ surface shoe = 2100 psi ✓
(1 psi/ft frac grad)

test to 1589 psi ✓

Stop surf. cont ✓

✓ Adequate
DUD 4/23/07

Uenta

TOC @ 0.

TOC @ 741.

to surf. w/5% w/o
*Surf. Stop ✓

1259' Green River

1480' Birds Nest Water

2081' Mahogany

Surface
2100. MD

4483' Wasatch

5100' ± BMSW

7382' Mesaverde

8372' MV U2

8903' MV L1

4-1/2"
MW 11.5

Production
9570. MD

Well name:	2007-04 Kerr McGee NBU 1021-16D	
Operator:	Kerr McGee Oil & Gas Onshore L.P.	
String type:	Surface	Project ID: 43-047-39109
Location:	Uintah County, Utah	

Design parameters:

Collapse

Mud weight: 8.300 ppg
Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 104 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,400 ft

Cement top: 741 ft

Burst

Max anticipated surface pressure: 1,848 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 2,100 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.
Neutra point: 1,844 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 9,570 ft
Next mud weight: 11.500 ppg
Next setting BHP: 5,717 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 2,100 ft
Injection pressure: 2,100 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	2100	9.625	32.30	H-40	ST&C	2100	2100	8.876	928
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	905	1370	1.513	2100	2270	1.08	60	254	4.26 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Minerals

Phone: (801) 538-5357
FAX: (801) 359-3940

Date: April 19, 2007
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 2100 ft, a mud weight of 8.3 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	2007-04 Kerr McGee NBU 1021-16D	
Operator:	Kerr McGee Oil & Gas Onshore L.P.	
String type:	Production	Project ID: 43-047-39109
Location:	Uintah County, Utah	

Design parameters:

Collapse
Mud weight: 11.500 ppg
Design is based on evacuated pipe.

Minimum design factors:

Collapse:
Design factor 1.125

Environment:

H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 209 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Burst

Max anticipated surface pressure: 3,612 psi
Internal gradient: 0.220 psi/ft
Calculated BHP 5,717 psi

Burst:
Design factor 1.00

Cement top: Surface

No backup mud specified.

Tension:
8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Non-directional string.

Tension is based on buoyed weight.
Neutral point: 7,925 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	9570	4.5	11.60	I-80	LT&C	9570	9570	3.875	835.1
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	5717	6360	1.112	5717	7780	1.36	92	212	2.31 J

o.k. internal gradient

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Minerals

Phone: (801) 538-5357
FAX: (801) 359-3940

Date: April 19, 2007
Salt Lake City, Utah

Remarks:
Collapse is based on a vertical depth of 9570 ft, a mud weight of 11.5 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

March 27, 2007

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2007 Plan of Development Natural Buttes Unit Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2007 within the Natural Buttes Unit, Uintah County, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ Wasatch/MesaVerde)		
43-047-39107	NBU 1021-13N Sec 13 T10S R21E 0948 FSL 1602 FWL	
43-047-39108	NBU 1021-13H Sec 13 T10S R21E 2351 FNL 0515 FEL	
43-047-39109	NBU 1021-16D Sec 16 T10S R21E 0666 FNL 0666 FWL	
43-047-39106	NBU 1021-28I Sec 28 T10S R21E 2269 FSL 0930 FEL	
43-047-39100	NBU 1021-28F Sec 28 T10S R21E 1767 FNL 2157 FWL	
43-047-39101	NBU 1021-28E Sec 28 T10S R21E 2046 FNL 0856 FWL	
43-047-39102	NBU 1021-28D Sec 28 T10S R21E 0604 FNL 0614 FWL	
43-047-39103	NBU 1021-28C Sec 28 T10S R21E 0476 FNL 1997 FWL	
43-047-39104	NBU 1021-28B Sec 28 T10S R21E 0767 FNL 1997 FEL	
43-047-39110	NBU 1021-29P Sec 29 T10S R21E 0286 FSL 1236 FEL	
43-047-39111	NBU 1021-31A Sec 31 T10S R21E 0744 FNL 0815 FEL	
43-047-39116	NBU 1021-31B Sec 31 T10S R21E 0777 FNL 1911 FEL	
43-047-39136	NBU 1021-32G Sec 32 T10S R21E 2038 FNL 2065 FEL	
43-047-39137	NBU 1021-32D Sec 32 T10S R21E 0777 FNL 0355 FWL	
43-047-39138	NBU 1021-32E Sec 32 T10S R21E 1858 FNL 0651 FWL	
43-047-39139	NBU 1022-19P Sec 19 T10S R22E 0766 FSL 0298 FEL	
43-047-39141	NBU 1022-24J Sec 24 T10S R22E 1928 FSL 1972 FEL	
43-047-39140	NBU 1022-24P Sec 24 T10S R22E 1110 FSL 1054 FEL	
43-047-39142	NBU 1022-25G Sec 25 T10S R22E 1761 FNL 1462 FEL	
43-047-39033	NBU 1022-25H Sec 25 T10S R22E 2604 FNL 0825 FEL	
43-047-39156	NBU 1022-24O Sec 24 T10S R22E 0645 FSL 2007 FEL	
43-047-39157	NBU 1022-7I Sec 07 T10S R22E 2000 FSL 0948 FEL	

Page 2

Our records indicate the NBU 1021-28I and the NBU 1022-25H are closer than 460 feet from the Natural Buttes Unit boundary (approximately 390 and 36 feet respectively).

We have no objections to permitting the wells so long as the unit operator receives an exception to the locating and siting requirements of the State of Utah (R649-3-2).

/s/ Michael L. Coulthard

bcc: File – Natural Buttes Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:3-27-07

From: Ed Bonner
To: Mason, Diana
Date: 4/23/2007 3:38 PM
Subject: Well Clearance

CC: Davis, Jim; Garrison, LaVonne; Hill, Brad; Hunt, Gil
The following wells have been given cultural resources clearance by the Trust Lands Cultural Resources Group:

Bill Barrett Corporation
Peters Point State 8-2D-13-16 (API 43 007 31280)

EnCana Oil & Gas (USA) Inc
Middle Mountain State 36-12-29-24 (API 43 037 31855)

EOG Resources, Inc
East Chapita 60-16 (API 43 047 39150)
East Chapita 57-16 (API 43 047 39151)
East Chapita 58-16 (API 43 047 39152)

Kerr McGee Oil & Gas Onshore LP
NBU 1021-13N (API 43 047 39107)
NBU 1021-13H (API 43 047 39108)
NBU 1021-16D (API 43 047 39109)
NBU 1022-19P (API 43 047 39139)

If you have any questions regarding this matter please give me a call.



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

April 24, 2007

Kerr McGee Oil & Gas Onshore LP
1368 S 1200 E
Vernal, UT 84078

Re: Natural Buttes Unit 1021-16D Well, 666' FNL, 666' FWL, NW NW, Sec. 16,
T. 10 South, R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39109.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
SITLA
Bureau of Land Management, Vernal Office

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.
5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)
6. Surface casing shall be cemented to the surface.
7. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-10755
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE LP		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME: UNIT #891008900A
4. LOCATION OF WELL FOOTAGES AT SURFACE: 666'FNL, 666'FWL		8. WELL NAME and NUMBER: NBU 1021-16D
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWNW 16 10S 21E		9. API NUMBER: 4304739109
COUNTY: UINTAH		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: DOGMA PD
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	EXTENSION

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION, SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON APRIL 24, 2007, AND ACCEPTED FOR UNIT PURPOSES BY THE BUREAU OF LAND MANAGEMENT ON APRIL 24, 2007.

Approved by the
Utah Division of
Oil, Gas and Mining

RECEIVED

MAY 02 2008

DIV. OF OIL, GAS & MINING

COPY SENT TO OPERATOR

Date: 5.6.2008

Initials: KS

Date: 05-05-08

By: [Signature]

NAME (PLEASE PRINT) SHEILA UPCHEGO	TITLE SENIOR LAND ADMIN SPECIALIST
SIGNATURE <u>[Signature]</u>	DATE 4/22/2008

(This space for State use only)

RESET

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304739109
Well Name: NBU 1021-16D
Location: NW/NW SEC. 16, T10S, R21E
Company Permit Issued to: KERR McGEE OIL & GAS ONSHORE LP
Date Original Permit Issued: 4/24/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

4/22/2008

Date

Title: SENOIR LAND ADMIN SPECIALIST

Representing: KERR-McGEE OIL & GAS ONSHORE LP

RECEIVED

MAY 02 2008

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: ML-10755
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: NBU 1021-16D
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047391090000
3. ADDRESS OF OPERATOR: PO BOX 173779 , DENVER , CO, 802173779	PHONE NUMBER: (720)929-6485
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0666 FNL 0666 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 16 Township: 10.0S Range: 21.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 6/1/2009	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The original APD for this location was approved on April 24, 2007, and was extended on May 5, 2008. Kerr-McGee Oil & Gas Onshore LP (Kerr-McGee) respectfully requests an extension for the maximum time possible so that the drilling operations may be completed. Please contact the undersigned if you have any questions and/or comments.

Thank you.

Approved by the Utah Division of Oil, Gas and Mining

Date: April 27, 2009

By: 

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
SIGNATURE N/A		DATE 4/22/2009



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047391090000

API: 43047391090000

Well Name: NBU 1021-16D

Location: 0666 FNL 0666 FWL QTR NWNW SEC 16 TWNP 100S RNG 210E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 4/24/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Kathy Schneebeck-Dulnoan

Date: 4/22/2009

Title: Staff Regulatory Analyst

Representing: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date: April 27, 2009

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: ML-10755
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: NBU 1021-16D
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047391090000
3. ADDRESS OF OPERATOR: PO BOX 173779 , DENVER , CO, 802173779	PHONE NUMBER: (720)929-6485
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0666 FNL 0666 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 16 Township: 10.0S Range: 21.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 6/1/2009	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The original APD for this location was approved on April 24, 2007, and was extended on May 5, 2008. Kerr-McGee Oil & Gas Onshore LP (Kerr-McGee) respectfully requests an extension for the maximum time possible so that the drilling operations may be completed. Please contact the undersigned if you have any questions and/or comments.

Thank you.

Approved by the Utah Division of Oil, Gas and Mining

Date: April 27, 2009

By: 

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
SIGNATURE N/A		DATE 4/22/2009



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047391090000

API: 43047391090000

Well Name: NBU 1021-16D

Location: 0666 FNL 0666 FWL QTR NWNW SEC 16 TWNP 100S RNG 210E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 4/24/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**


Signature: Kathy Schneebeck-Dulnoan

Date: 4/22/2009

Title: Staff Regulatory Analyst

Representing: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date: April 27, 2009

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: ML-10755
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: NBU 1021-16D
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047391090000
3. ADDRESS OF OPERATOR: PO BOX 173779 , DENVER , CO, 802173779	PHONE NUMBER: (720)929-6485
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0666 FNL 0666 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 16 Township: 10.0S Range: 21.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 6/1/2009	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The original APD for this location was approved on April 24, 2007, and was extended on May 5, 2008. Kerr-McGee Oil & Gas Onshore LP (Kerr-McGee) respectfully requests an extension for the maximum time possible so that the drilling operations may be completed. Please contact the undersigned if you have any questions and/or comments.

Thank you.

Approved by the Utah Division of Oil, Gas and Mining

Date: April 27, 2009

By: 

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
SIGNATURE N/A		DATE 4/22/2009



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047391090000

API: 43047391090000

Well Name: NBU 1021-16D

Location: 0666 FNL 0666 FWL QTR NWNW SEC 16 TWNP 100S RNG 210E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 4/24/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated?
• Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?
• Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?
• Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location?
• Has the approved source of water for drilling changed?
• Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?
• Is bonding still in place, which covers this proposed well?

Approved by the Utah Division of Oil, Gas and Mining

Signature: Kathy Schneebeck-Dulnoan

Date: 4/22/2009

Title: Staff Regulatory Analyst

Representing: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date: April 27, 2009

By:

[Handwritten signature]

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML-10755

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:
NATURAL BUTTES

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
NBU 1021-16D

2. NAME OF OPERATOR:
KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER:
43047391090000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779
PHONE NUMBER: 720 929-6514

9. FIELD and POOL or WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
0666 FNL 0666 FWL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: NWNW Section: 16 Township: 10.0S Range: 21.0E Meridian: S

COUNTY:
UINTAH

STATE:
UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 6/1/2009	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The original APD for this location was approved on April 24, 2007, and was extended on May 5, 2008. Kerr-McGee Oil & Gas Onshore LP (Kerr-McGee) respectfully requests an extension for the maximum time possible so that the drilling operations may be completed. Please contact the undersigned if you have any questions and/or comments.
Thank you.

**Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
January 19, 2012**

NAME (PLEASE PRINT)
Kathy Schneebeck-Dulnoan

PHONE NUMBER
720 929-6007

TITLE
Staff Regulatory Analyst

SIGNATURE
N/A

DATE
4/22/2009