

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT   
(highlight changes)

<b>APPLICATION FOR PERMIT TO DRILL</b>		5. MINERAL LEASE NO: UTU-02278	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>		7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>		8. UNIT or CA AGREEMENT NAME: UNIT #891008900A	
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE L.P.		9. WELL NAME and NUMBER: NBU 1021-20G	
3. ADDRESS OF OPERATOR: 1368 S 1200 E CITY VERNAL STATE UT ZIP 84078		PHONE NUMBER: (435) 781-7024	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 2085'FNL, 2264'FEL AT PROPOSED PRODUCING ZONE:		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE 20 10S 21E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 22.6 +/- MILES SOUTHEAST OF OURAY, UTAH		12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 2085'	16. NUMBER OF ACRES IN LEASE: 1440.00	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: NBU	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) REFER TO TOPO C	19. PROPOSED DEPTH: 9,450	20. BOND DESCRIPTION: RLB0005237	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5193'GL	22. APPROXIMATE DATE WORK WILL START:	23. ESTIMATED DURATION:	

**PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
12 1/4"	9 5/8	32.3#	H-40	1,900	265 SX CLASS G	1.18 YIELD	15.6 PPG
7 7/8"	4 1/2	11.6#	I-80	9,450	1990 SX 50/50 POZ	1.31 YIELD	14.3 PPG

**ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER     | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN                                   |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) SHEILA UPCHEGO TITLE SENIOR LAND ADMIN SPECIALIST  
SIGNATURE  DATE 8/8/2007


(This space for State use only)

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**RECEIVED  
AUG 16 2007**

API NUMBER ASSIGNED: 43-047-39526

APPROVAL:

Date: 10-15-07  
By: 

DIV. OF OIL, GAS & MINING

1977 Brass Cap  
0.2' High, Pile  
of Stones

# T10S, R21E, S.L.B.&M.

1977 Brass Cap  
0.5' High, Pile  
of Stones

S89°12'09"W  
1277.46' (Meas.)

S89°52'27"W  
1381.23' (Meas.)

S89°35'20"W - 2660.26' (Meas.)

1977 Brass Cap  
0.5' High, Pile  
of Stones

1977 Brass Cap  
1.3' High, Pile  
of Stones

2085'

N00°09'59"W - 2665.60' (Meas.)

NBU #1021-20G  
Elev. Ungraded Ground = 5194'

2264'

20

1977 Brass Cap  
2.0' High, Pile  
of Stones

N00°12'05"W - 2665.65' (Meas.)

1977 Brass Cap  
0.8' High, Pile  
of Stones

N89°45'43"E - 5326.17' (Meas.)

S00°06'18"E - 5313.46' (Meas.)

Set Marked  
Stone

## Kerr-McGee Oil & Gas Onshore LP


Well location, NBU #1021-20G, located as shown in the SW 1/4 NE 1/4 of Section 20, T10S, R21E, S.L.B.&M., Uintah County, Utah.

### BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

### BASIS OF BEARINGS


BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

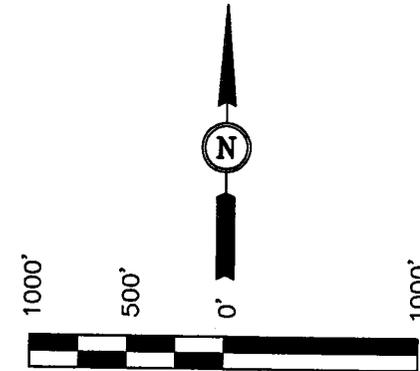

SCALE

### CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE UNDER MY PERSONAL SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



**UINTAH ENGINEERING & LAND SURVEYING**  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

### LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)  
LATITUDE = 39°56'05.18" (39.934772)  
LONGITUDE = 109°34'27.58" (109.574328)

(NAD 27)  
LATITUDE = 39°56'05.31" (39.934808)  
LONGITUDE = 109°34'25.10" (109.573639)

SCALE 1" = 1000'	DATE SURVEYED: 12-20-06	DATE DRAWN: 12-28-06
PARTY D.A. A.H. L.K.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE Kerr-McGee Oil & Gas Onshore LP	

**NBU 1021-20G  
SW/NE SEC. 20, T10S, R21E  
UINTAH COUNTY, UTAH  
UTU-02278**

**ONSHORE ORDER NO. 1**

***DRILLING PROGRAM***

**1. Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1125'
Top of Birds Nest Water	1350'
Mahogany	1929'
Wasatch	4344'
Mesaverde	7279'
MVU2	8219'
MVL1	8769'
TD	9450'

**2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Water	Green River	1125'
	Top of Birds Nest Water	1350'
	Mahogany	1929'
Gas	Wasatch	4344'
Gas	Mesaverde	7279'
Gas	MVU2	8219'
Gas	MVL1	8769'
Water	N/A	
Other Minerals	N/A	

**3. Pressure Control Equipment (Schematic Attached)**

*Please refer to the attached Drilling Program.*

**4. Proposed Casing & Cementing Program:**

*Please refer to the attached Drilling Program.*

**5. Drilling Fluids Program:**

*Please refer to the attached Drilling Program.*

The operator will use fresh water mud with 0-8% Bio Diesel.

6. **Evaluation Program:**

*Please refer to the attached Drilling Program.*

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 9450' TD, approximately equals 5859 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3780 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

*Drilling is planned to commence immediately upon approval of this application.*

9. **Variances:**

*Please refer to the attached Drilling Program.*

10. **Other Information:**

*Please refer to the attached Drilling Program.*



# KERR-McGEE OIL & GAS ONSHORE LP DRILLING PROGRAM

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE August 7, 2007  
 WELL NAME NBU 1021-20G TD 9,450' MD/TVD \_\_\_\_\_  
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,194' GL KB 5,209'  
 SURFACE LOCATION SW/NE SEC. 20, T10S, R21E 2085'FNL, 2264'FEL BHL Straight Hole  
 Latitude: 39.934772 Longitude: 109.574328  
 OBJECTIVE ZONE(S) Wasatch/Mesaverde  
 ADDITIONAL INFO Regulatory Agencies: BLM (SURF & MINERALS), UDOGM, Tri-County Health Dept.

GEOLOGICAL			MECHANICAL		
LOGS	FORMATION TOPS	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 32.3#, H-40, STC	Air mist
Catch water sample, if possible, from 0 to 4,344' Green River @ 1,125' Top of Birds Nest Water @ 1350' Preset f/ GL @ 1,900' MD					
Note: 12.25" surface hole will usually be drilled ±400' below the bottom of lost circulation zone. Drilled depth may be ±200' of the estimated set depth depending on the actual depth of the loss zone.					
	Mahogany @	1,929'			Fresh Water Mud W/0-8% BIO Diesel
Mud logging program TBD Open hole logging program f/ TD - surf csg			7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	8.3-11.5 ppg
	Wasatch @	4,344'			
	Mverde @	7,279'			
	MVU2 @	8,219'			
	MVL1 @	8,769'			
	TD @	9,450'			Max anticipated Mud required 11.5 ppg



**KERR-McGEE OIL & GAS ONSHORE LP  
DRILLING PROGRAM**

**CASING PROGRAM**

	SIZE	INTERVAL	WT	GR	CPLG	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1900	32.30	H-40	STC	0.64*****	1.54	4.73
PRODUCTION	4-1/2"	0 to 9450	11.60	I-80	LTC	2.18	1.12	2.10

1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point)  
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)  
 (Burst Assumptions: TD = 11.5 ppg) .22 psi/ft = gradient for partially evac wellbore  
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing\*Buoy.Fact. of water)  
 MASP 3572 psi  
 \*\*\*\*\* Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

**CEMENT PROGRAM**

	LEAD	TOP OUT CMT (1)	TOP OUT CMT (2)	LEAD	TAIL	TOP OUT CMT	LEAD	TAIL
SURFACE Option 1	500	200	as required	<b>NOTE: If well will circulate water to surface, option 2 will be utilized</b>				
				1500	500	as required	420	1570
SURFACE Option 2								
PRODUCTION	3,840'							

\*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained  
 \*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

**FLOAT EQUIPMENT & CENTRALIZERS**



SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

**ADDITIONAL INFORMATION**

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.  
 BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.  
 Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.  
 Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: \_\_\_\_\_ DATE: \_\_\_\_\_  
 Brad Laney  
 DRILLING SUPERINTENDENT: \_\_\_\_\_ DATE: \_\_\_\_\_  
 Randy Bayne

# 5M BOP STACK and CHOKE MANIFOLD SYSTEM

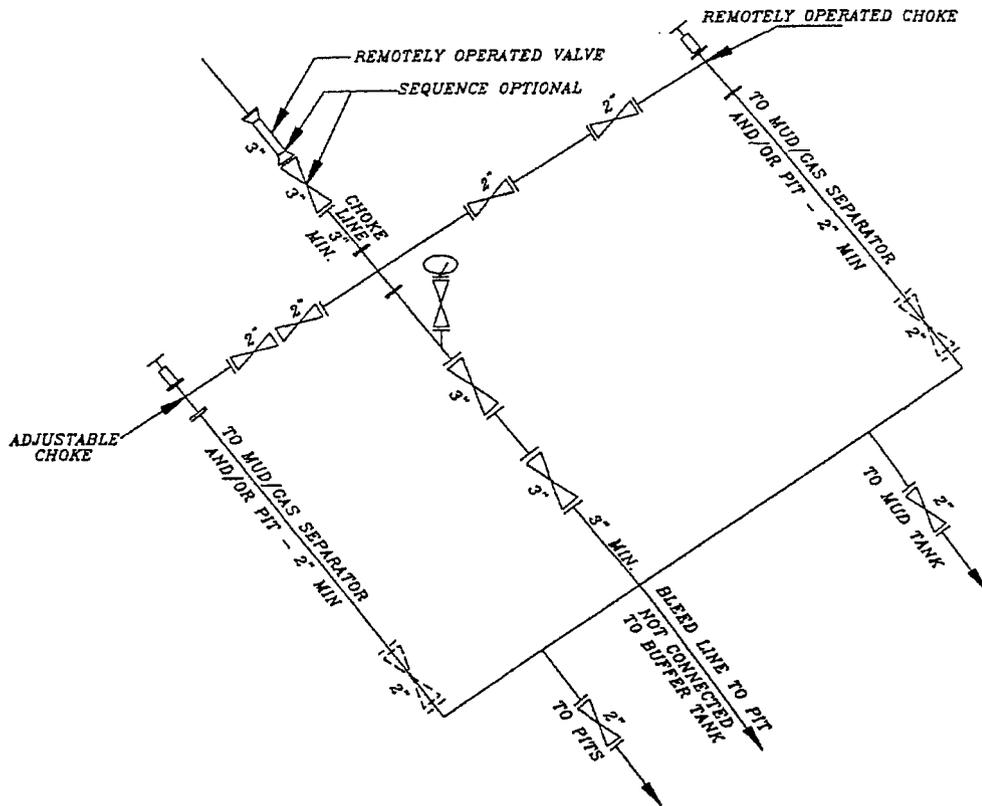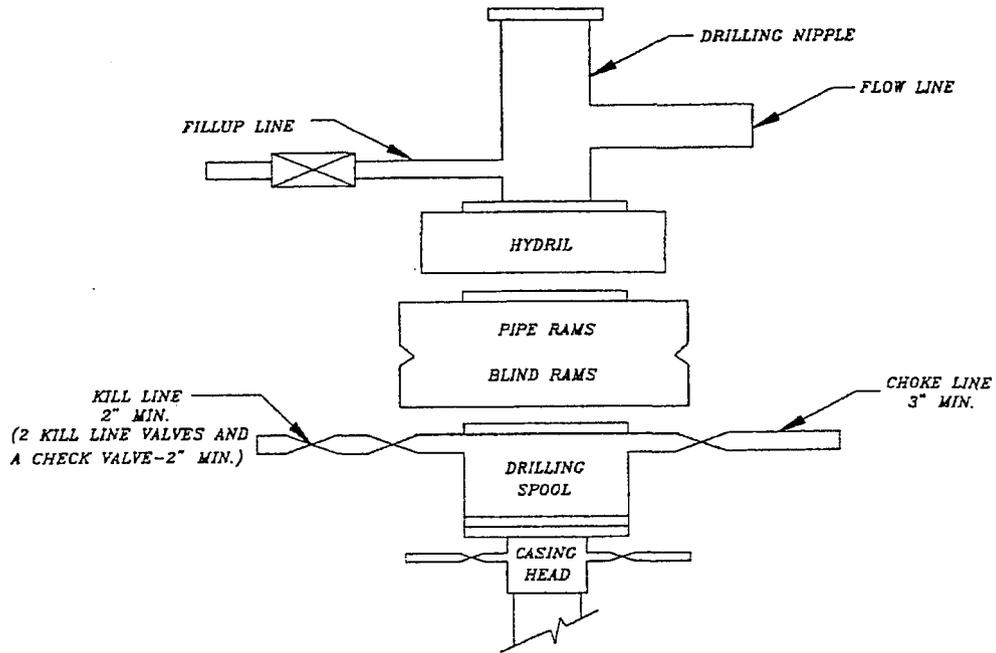

**NBU 1021-20G  
SW/NE SEC. 20, T10S, R21E  
Uintah County, UT  
UTU-02278**

**ONSHORE ORDER NO. 1**

***MULTI-POINT SURFACE USE & OPERATIONS PLAN***

**1. Existing Roads:**

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

Refer to Topo Maps A and B for location of access roads within a 2 mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

**2. Planned Access Roads:**

Approximately 0.1 +/- miles of new access road is proposed. Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

*Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities were determined at the on-site.*

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

**3. Location of Existing Wells Within a 1-Mile Radius:**

Please refer to Topo Map C.

**4. Location of Existing & Proposed Facilities:**

*The following guidelines will apply if the well is productive.*

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain

fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon, standard color number 2.5Y 6/2.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 462' +/- of 4" steel pipelines is proposed. Please refer to the attached Topo Map D for pipeline placement.

**5. Location and Type of Water Supply:**

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

**6. Source of Construction Materials:**

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

**7. Methods of Handling Waste Materials:**

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner and felt will be used, it will be a minimum of 20 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled By truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

**8. Ancillary Facilities:**

None are anticipated.

**9. Well Site Layout: (See Location Layout Diagram)**

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to current rig availability. If the proposed location is not large enough to accommodate the drilling rig the location will be re-surveyed and a Form 9 shall be submitted.

**10. Plans for Reclamation of the Surface:**

*Producing Location:*

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

A plastic, nylon reinforced liner will be used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

*Dry Hole/Abandoned Location:*

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

**11. Surface Ownership:**

SITLA  
675 East 500 South, Suite 500  
Salt Lake City, UT 84102

**12. Other Information:**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey has been completed on January 9, 2007 the archaeological report No. 06-676. The Paleontological report has been completed on April 26, 2007, the report No. 07-10, is submitted along with Application for Permit to Drill.

**13. Lessee's or Operators's Representative & Certification:**

Sheila Upchego  
Senior Land Admin Specialist  
Kerr-McGee Oil & Gas Onshore LP  
1368 South 1200 East.  
Vernal, UT 84078  
(435) 781-7024

Randy Bayne  
Drilling Manager  
Kerr-McGee Oil & Gas Onshore LP  
1368 South 1200 East  
Vernal, UT 84078  
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by State Surety Bond #RLB0005237.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

  
Sheila Upchego

8/8/2007

Date

Kerr-McGee Oil & Gas Onshore LP  
NBU #1021-20G  
SECTION 20, T10S, R21E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 11.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 4.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 1.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN RIGHT AND PROCEED IN A NORTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE JUNCTION OF THIS ROAD AND THE EXISTING NBU #420 AND AN EXISTING ROAD TO THE NORTHWEST; PROCEED IN A NORTHWESTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE #1021-20F TO THE NORTH; FOLLOW ROAD FLAGS IN A NORTHERLY, THEN NORTHWESTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE #1021-20B TO THE NORTH; FOLLOW ROAD FLAGS IN A NORTHERLY, THEN NORTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE WEST; FOLLOW ROAD FLAGS IN A WESTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 49.3 MILES.

# Kerr-McGee Oil & Gas Onshore LP

## NBU #1021-20G

LOCATED IN UINTAH COUNTY, UTAH  
SECTION 20, T10S, R21E, S.L.B.&M.

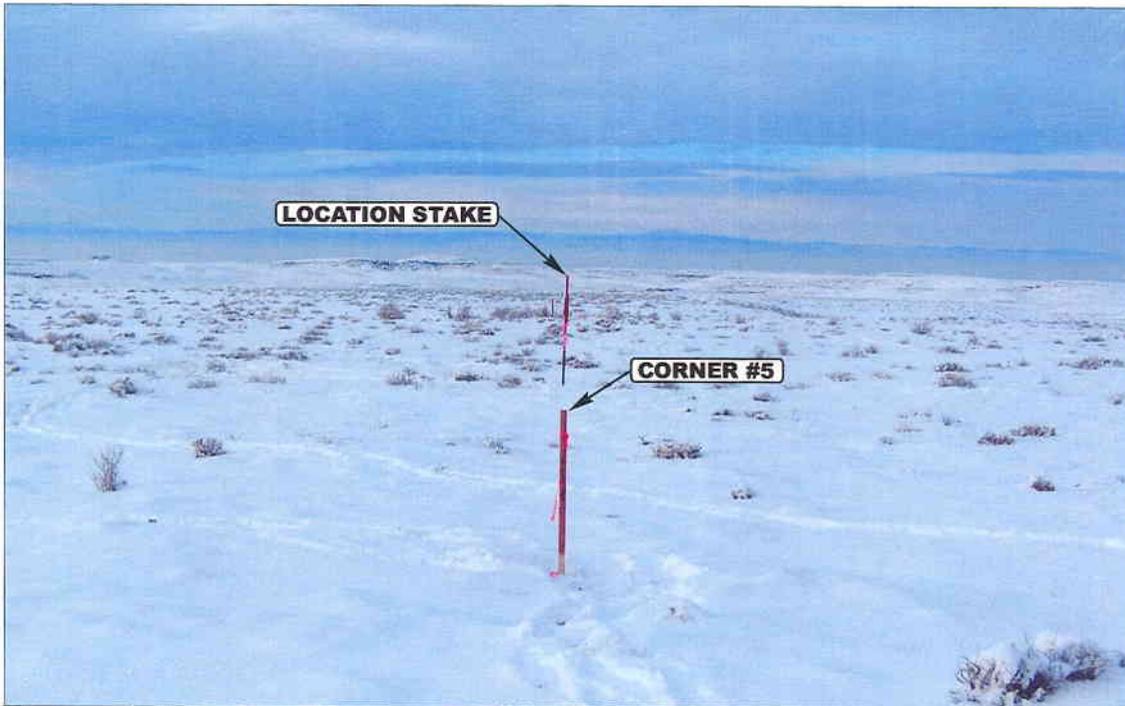


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: WESTERLY



- Since 1964 -

**UELS** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


12 28 06  
MONTH DAY YEAR

PHOTO

TAKEN BY: D.A.

DRAWN BY: L.K.

REVISED: 00-00-00

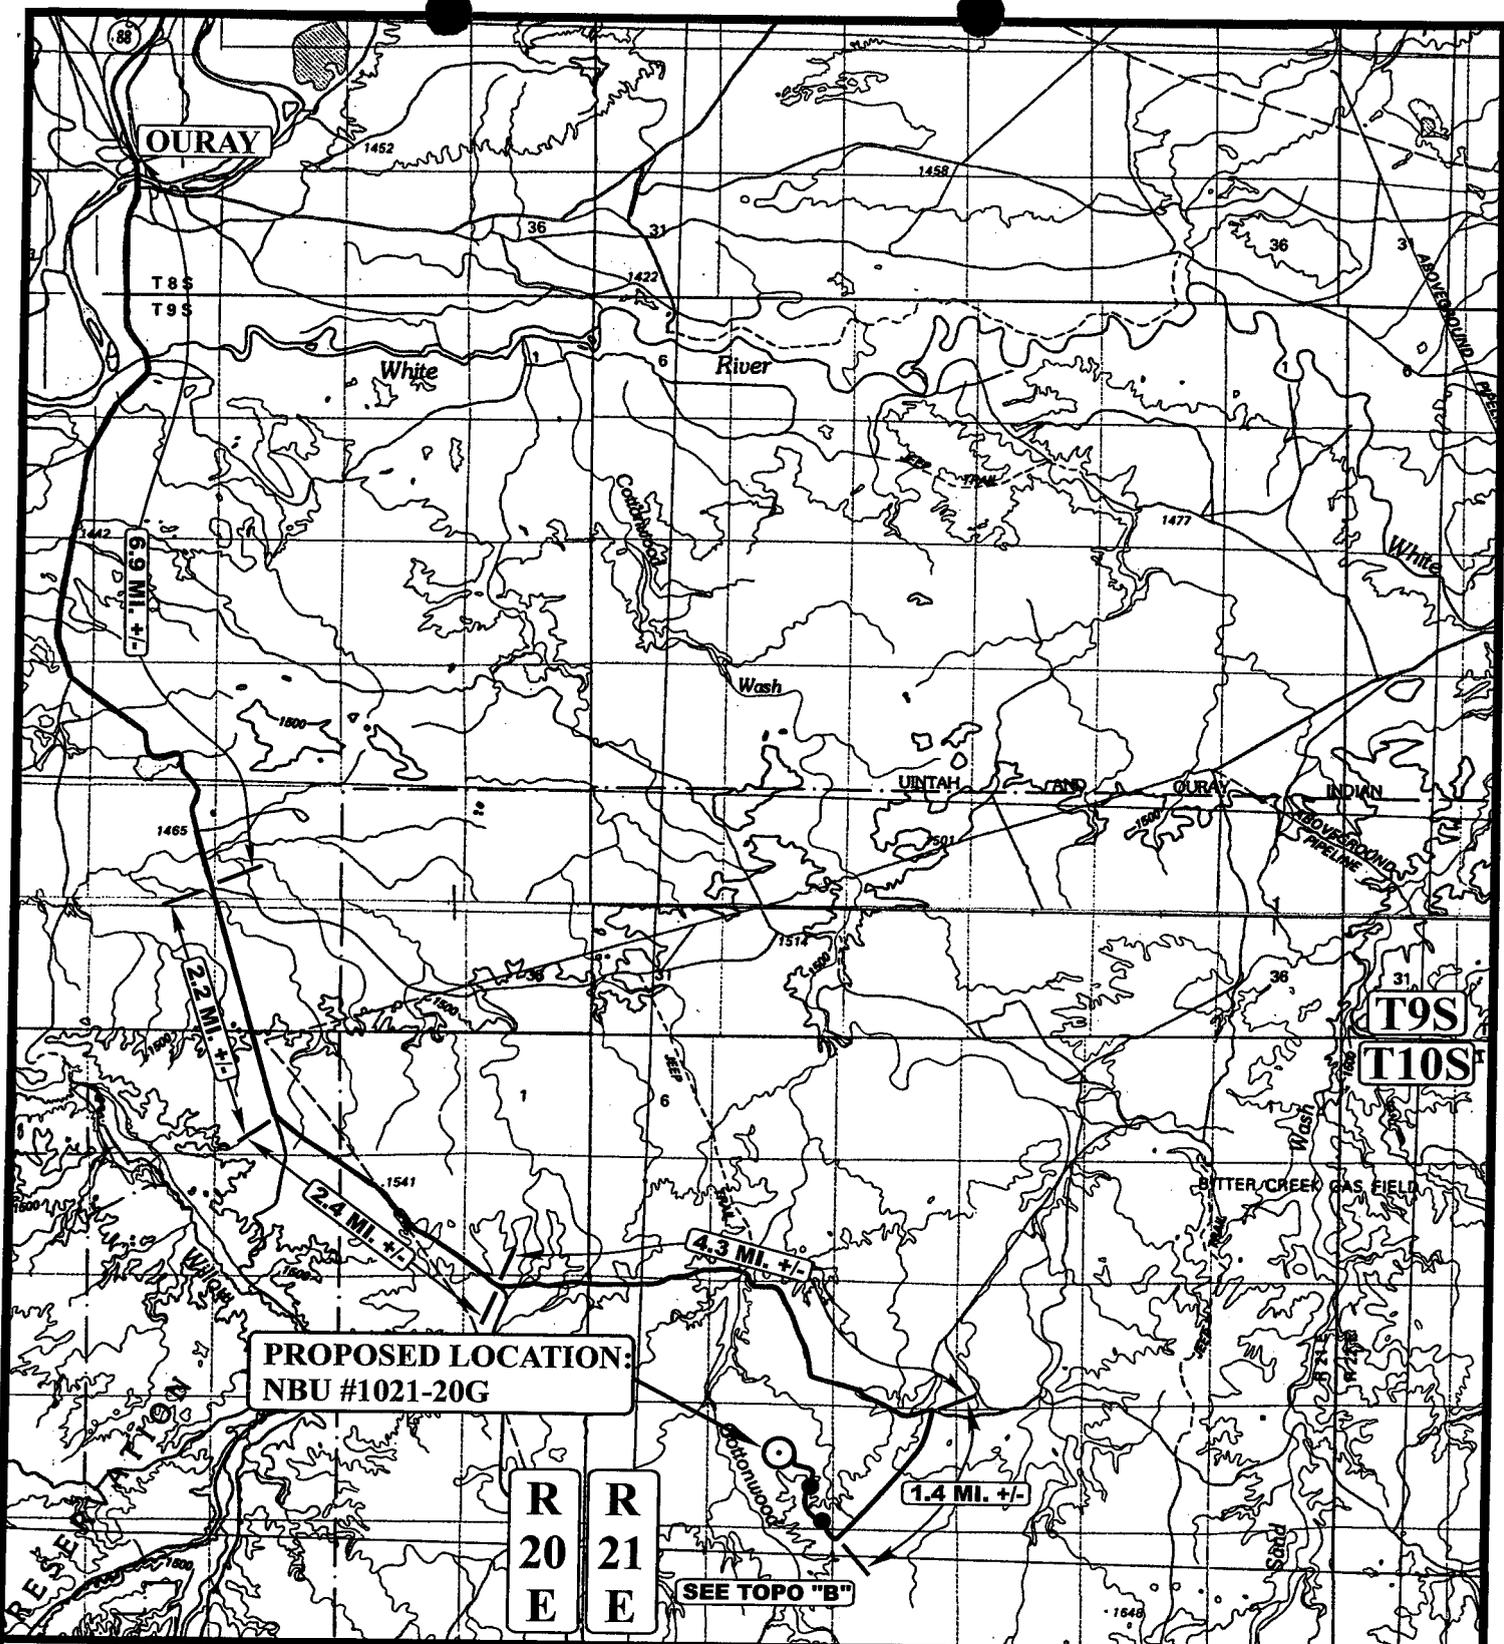

**LEGEND:**

○ PROPOSED LOCATION



**Kerr-McGee Oil & Gas Onshore LP**


**NBU #1021-20G**  
**SECTION 20, T10S, R21E, S.L.B.&M.**  
**2085' FNL 2264' FEL**



**Utah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC** 12 28 06  
**MAP** MONTH DAY YEAR  
 SCALE: 1:100,000 DRAWN BY: L.K. REVISED: 00-00-00



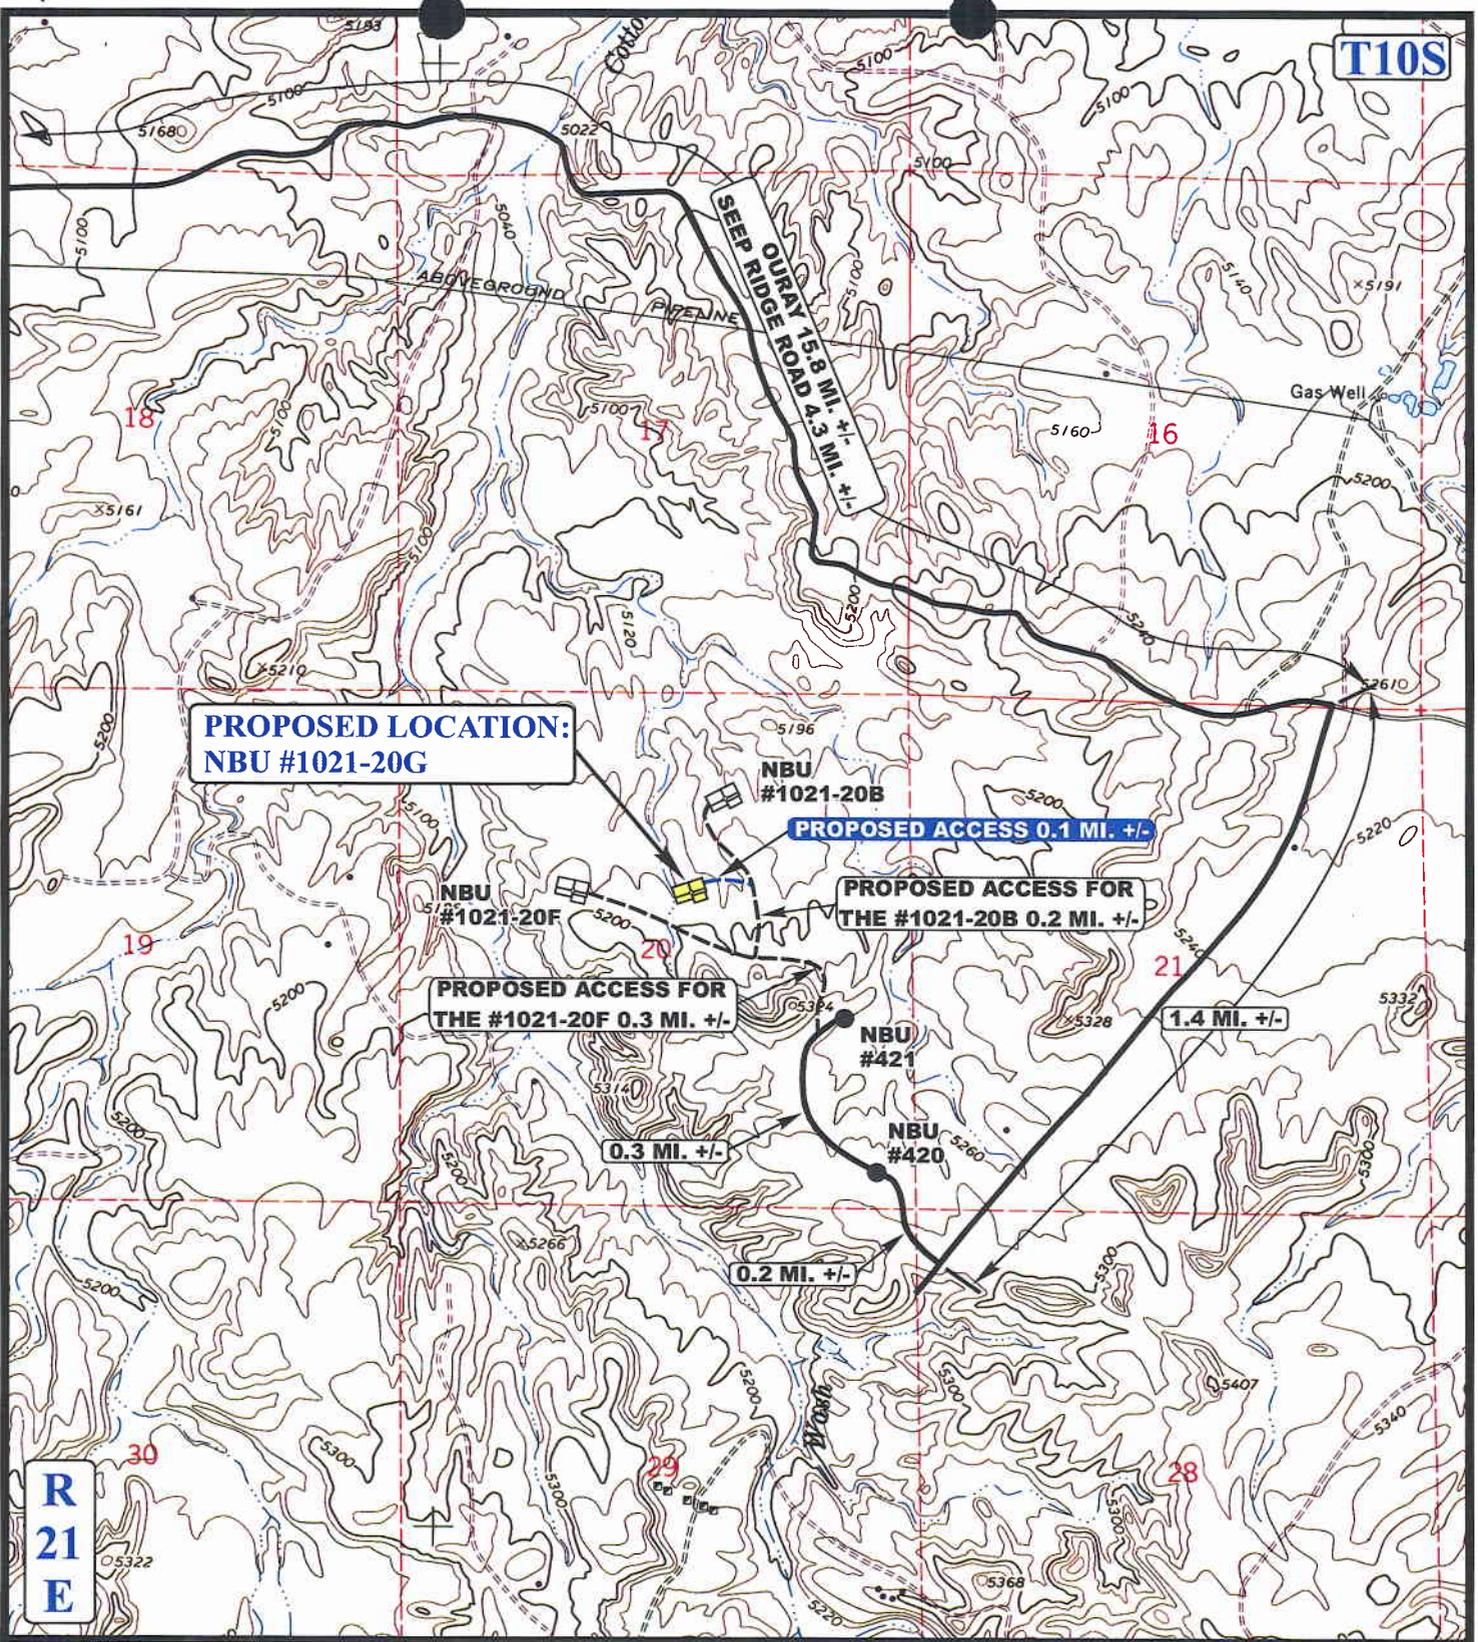

**PROPOSED LOCATION:  
NBU #1021-20G**

**PROPOSED ACCESS 0.1 MI. +/-**

**PROPOSED ACCESS FOR  
THE #1021-20B 0.2 MI. +/-**

**PROPOSED ACCESS FOR  
THE #1021-20F 0.3 MI. +/-**

**0.3 MI. +/-**

**0.2 MI. +/-**

**1.4 MI. +/-**

**LEGEND:**

- PROPOSED ACCESS ROAD
- EXISTING ROAD




**Kerr-McGee Oil & Gas Onshore LP**

**NBU #1021-20G  
SECTION 20, T10S, R21E, S.L.B.&M.  
2085' FNL 2264' FEL**

**UEIS** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC MAP** 12 28 06  
MONTH DAY YEAR  
SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00 **B TOPO**

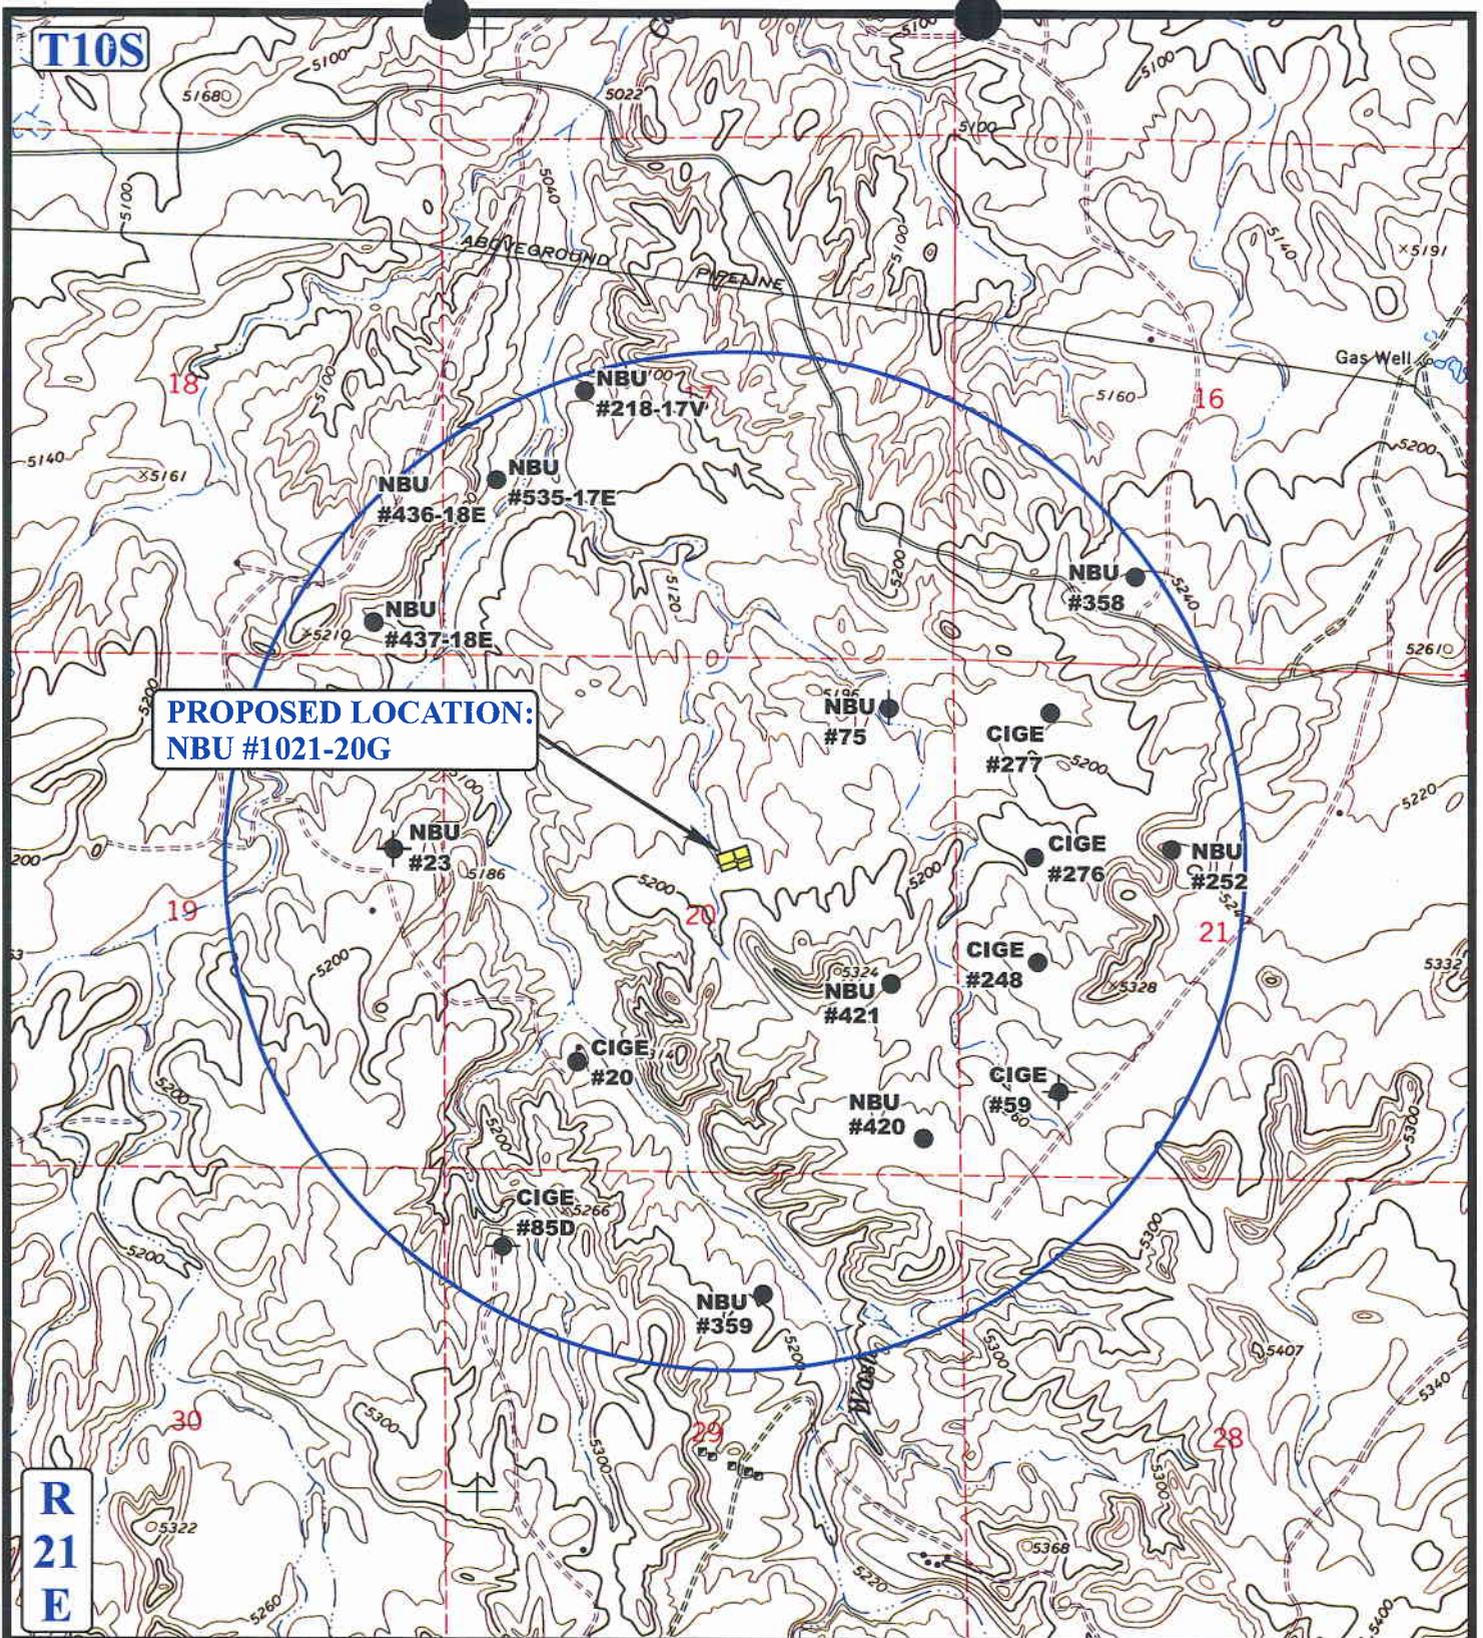

**LEGEND:**

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- ⬮ SHUT IN WELLS
- ⊗ WATER WELLS
- ⬮ ABANDONED WELLS
- ⬮ TEMPORARILY ABANDONED



**Kerr-McGee Oil & Gas Onshore LP**

**NBU #1021-20G**  
**SECTION 20, T10S, R21E, S.L.B.&M.**  
**2085' FNL 2264' FEL**




**Utah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC** 12 28 06  
**MAP** MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00



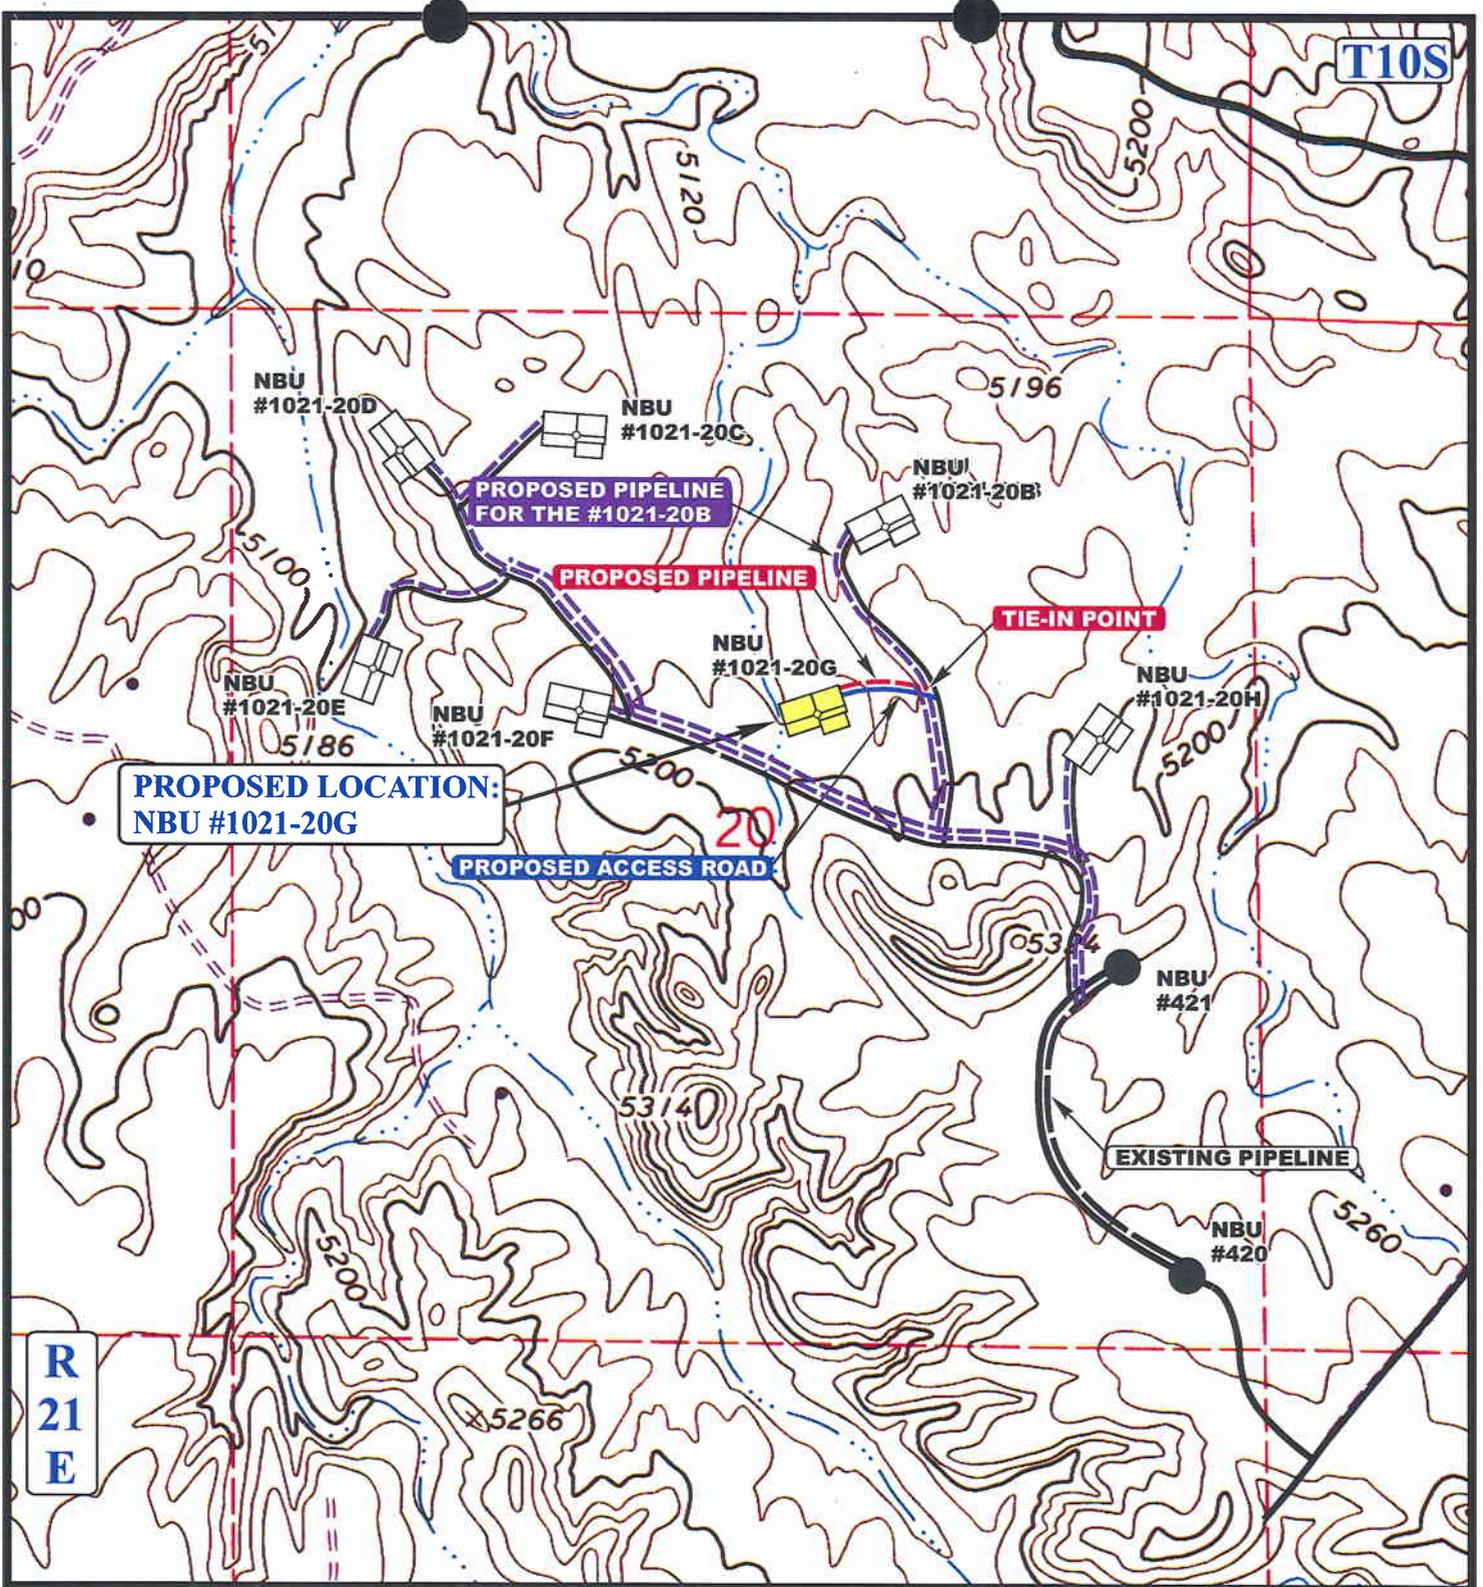

**APPROXIMATE TOTAL PIPELINE DISTANCE = 462' +/-**

**LEGEND:**

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE
- - - - PROPOSED PIPELINE (SERVICING OTHER WELLS)



**Kerr-McGee Oil & Gas Onshore LP**

**NBU #1021-20G**  
**SECTION 20, T10S, R21E, S.L.B.&M.**  
**2085' FNL 2264' FEL**

**UES** Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC MAP** 12 28 06  
 MONTH DAY YEAR  
 SCALE: 1" = 1000' DRAWN BY: L.K. REVISED: 00-00-00 **D TOPO**

# Kerr-McGee Oil & Gas Onshore LP

NBU #1021-20G

PIPELINE ALIGNMENT

LOCATED IN UINTAH COUNTY, UTAH

SECTION 20, T10S, R21E, S.L.B.&M.



PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: WESTERLY

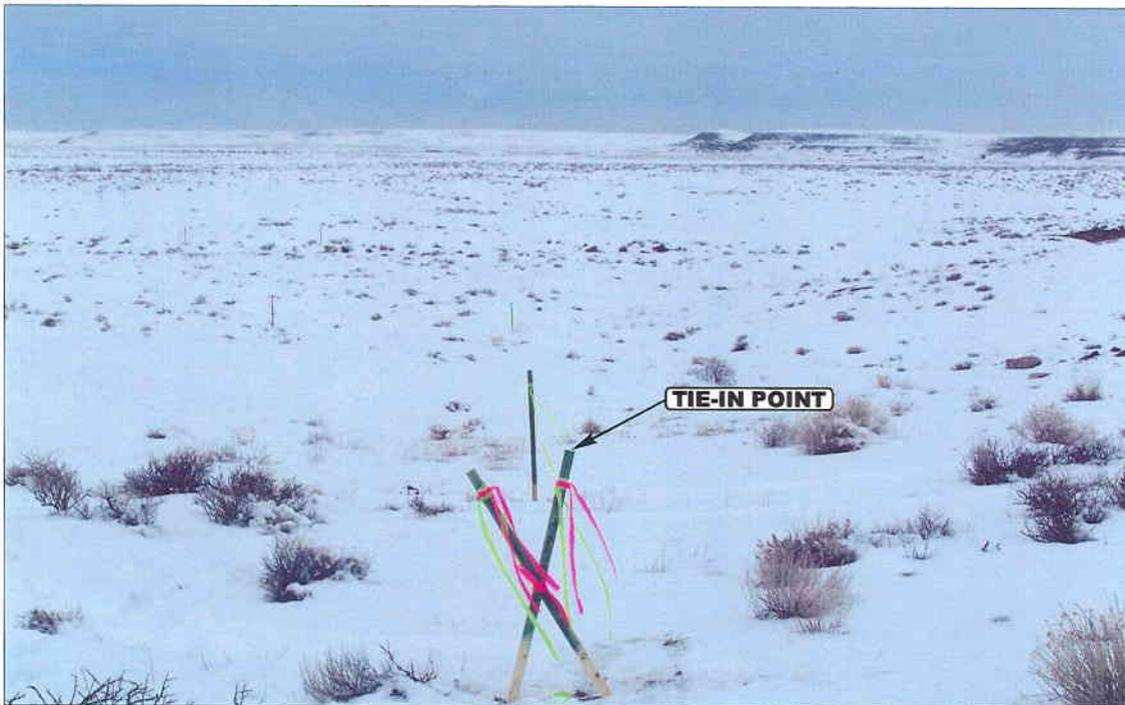


PHOTO: VIEW FROM TIE-IN POINT

CAMERA ANGLE: WESTERLY



- Since 1964 -

**UELS** Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

12 28 06  
MONTH DAY YEAR

PHOTO

TAKEN BY: D.A.

DRAWN BY: L.K.

REVISED: 00-00-00




# Kerr-McGee Oil & Gas Onshore LP






FIGURE #2

## TYPICAL CROSS SECTIONS FOR

NBU #1021-20G  
SECTION 20, T10S, R21E, S.L.B.&M.  
2085' FNL 2264' FEL



DATE: 12-28-06  
Drawn By: L.K.

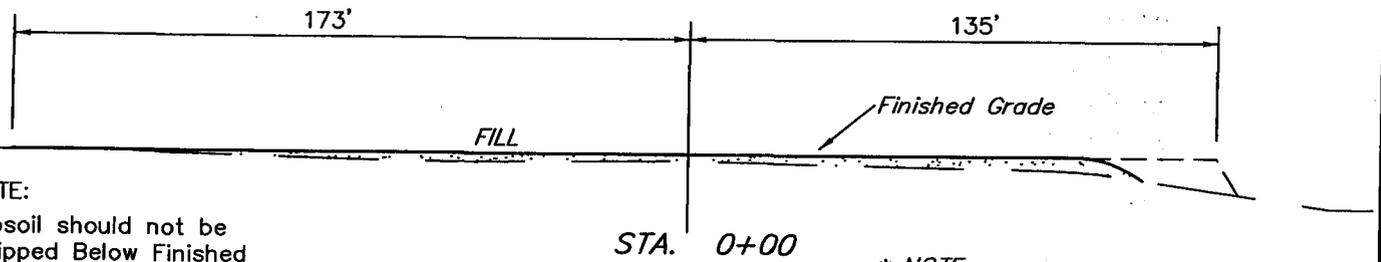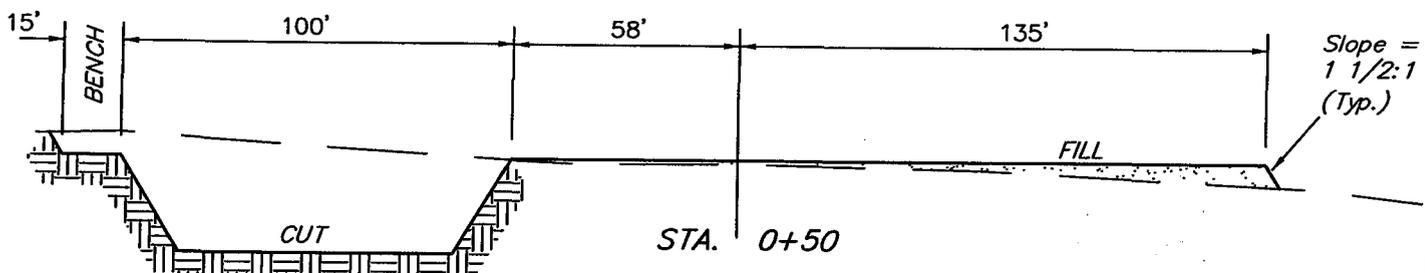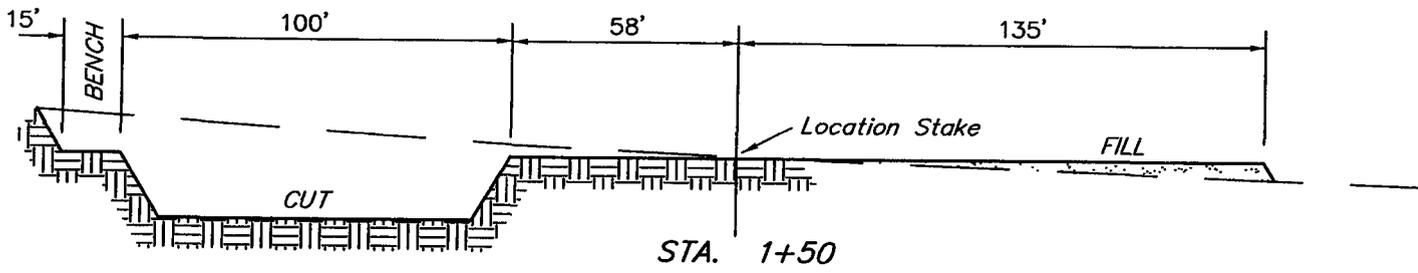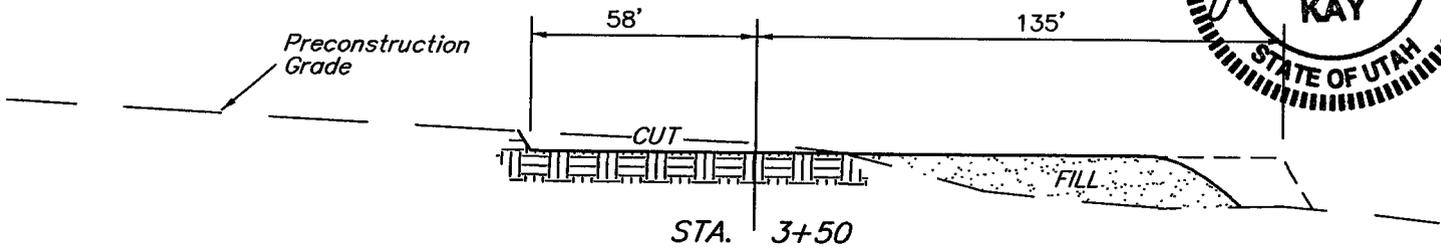

NOTE:  
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

\* NOTE:  
FILL QUANTITY INCLUDES 5% FOR COMPACTION

### APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,760 Cu. Yds.
Remaining Location	= 5,810 Cu. Yds.
<b>TOTAL CUT</b>	<b>= 7,570 CU.YDS.</b>
<b>FILL</b>	<b>= 3,050 CU.YDS.</b>

EXCESS MATERIAL	= 4,520 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,900 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 620 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

**WORKSHEET  
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 08/16/2007

API NO. ASSIGNED: 43-047-39526

WELL NAME: NBU 1021-20G  
 OPERATOR: KERR-MCGEE OIL & GAS ( N2995 )  
 CONTACT: SHEILA UPCHEGO

PHONE NUMBER: 435-781-7024

PROPOSED LOCATION:

SWNE 20 100S 210E  
 SURFACE: 2085 FNL 2264 FEL  
 BOTTOM: 2085 FNL 2264 FEL  
 COUNTY: UINTAH  
 LATITUDE: 39.93482 LONGITUDE: -109.5737  
 UTM SURF EASTINGS: 621874 NORTHINGS: 4421287  
 FIELD NAME: NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal  
 LEASE NUMBER: UTU-02278  
 SURFACE OWNER: 3 - State

PROPOSED FORMATION: WSMVD  
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. RLB0005237 )
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit  
(No. 43-8496 )
- RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:


- R649-2-3.
- Unit: NATURAL BUTTES
- R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit  
Board Cause No: 173-14  
Eff Date: 12-2-09  
Siting: 460' fr u b dr & 920' min. Tract
- R649-3-11. Directional Drill

COMMENTS:

Needs Permit (09-19-07)

STIPULATIONS:

- 1- Federal Approval
- 2- Oil Shale
- 3- STATEMENT OF BASIS

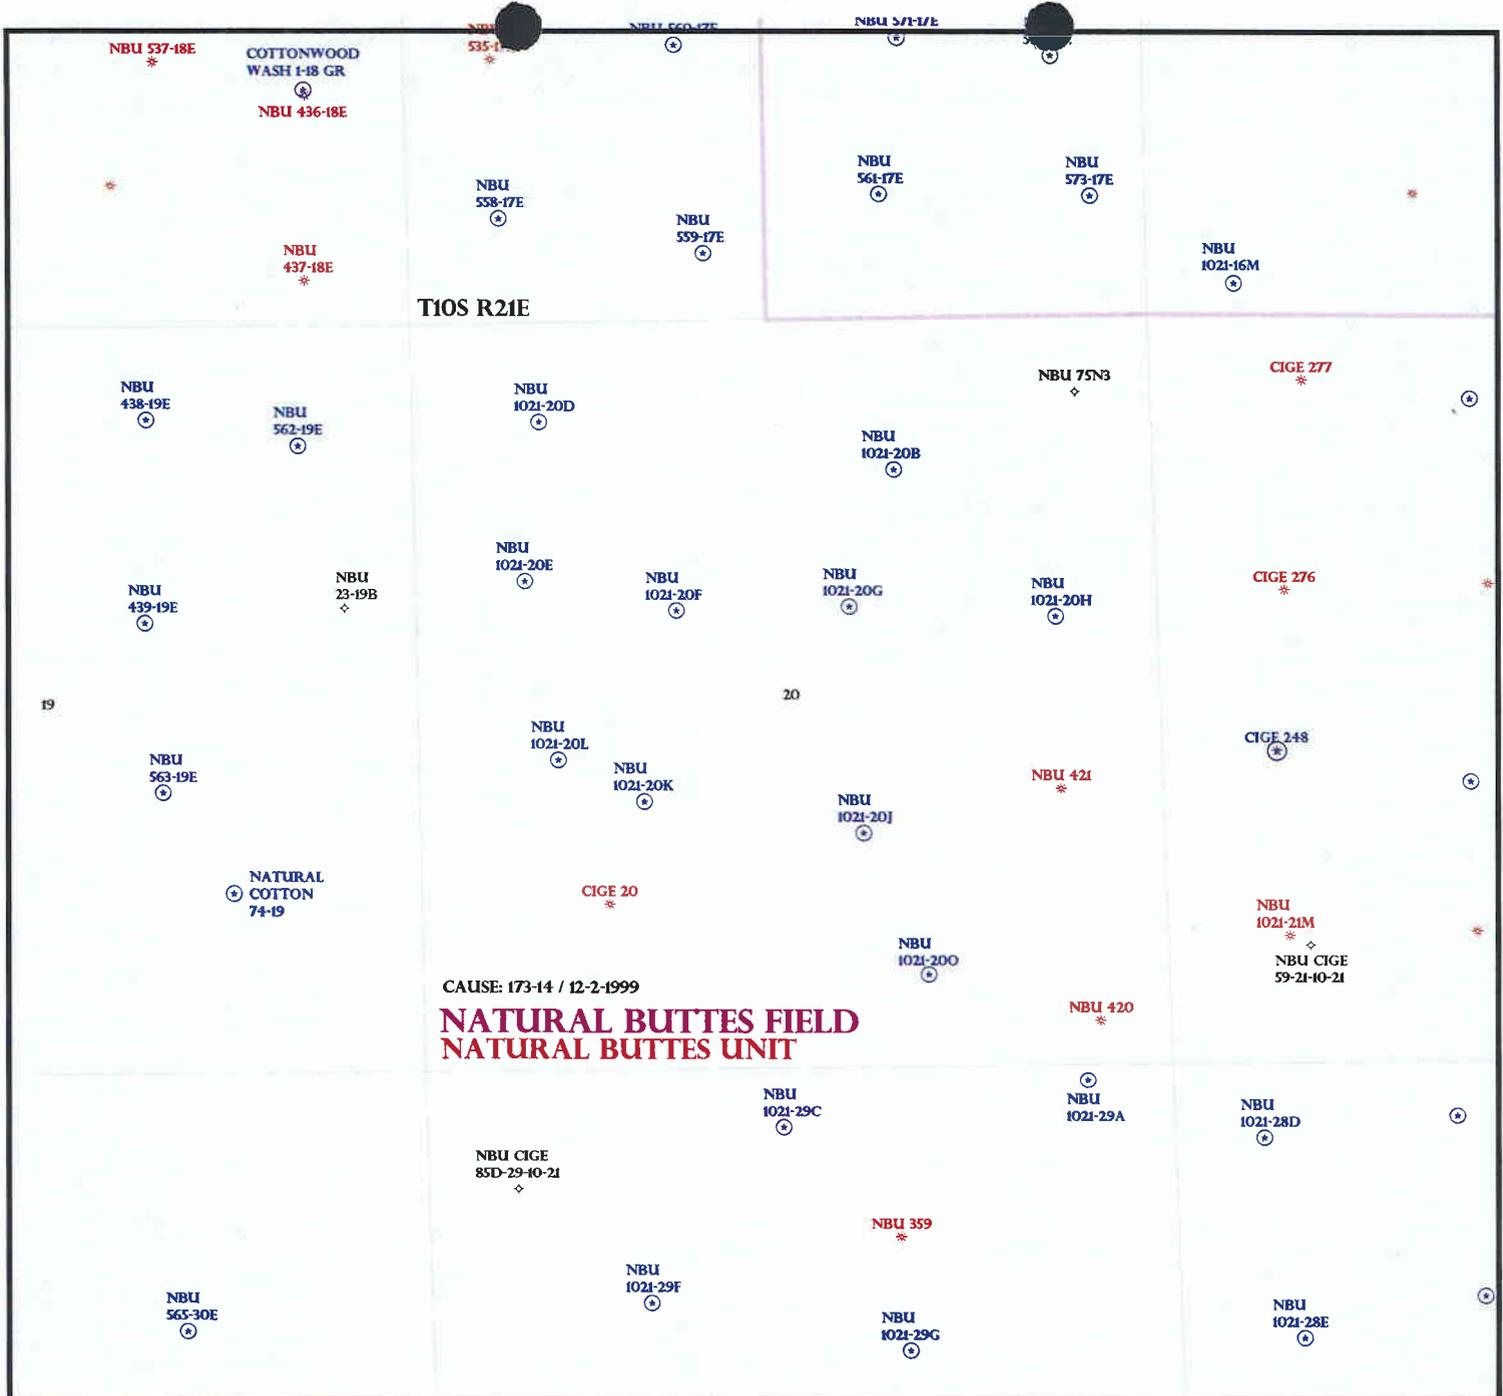

OPERATOR: KERR MCGEE O&G (N2995)

SEC: 20 T.10S R. 21E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 173-14 / 12-2-1999

**Field Status**

	ABANDONED
	ACTIVE
	COMBINED
	INACTIVE
	PROPOSED
	STORAGE
	TERMINATED

**Unit Status**

	EXPLORATORY
	GAS STORAGE
	NF PP OIL
	NF SECONDARY
	PENDING
	PI OIL
	PP GAS
	PP GEOTHERML
	PP OIL
	SECONDARY
	TERMINATED

**Wells Status**

	GAS INJECTION
	GAS STORAGE
	LOCATION ABANDONED
	NEW LOCATION
	PLUGGED & ABANDONED
	PRODUCING GAS
	PRODUCING OIL
	SHUT-IN GAS
	SHUT-IN OIL
	TEMP. ABANDONED
	TEST WELL
	WATER INJECTION
	WATER SUPPLY
	WATER DISPOSAL
	DRILLING



PREPARED BY: DIANA MASON  
DATE: 20-AUGUST-2007

# Application for Permit to Drill

## Statement of Basis

9/27/2007

Utah Division of Oil, Gas and Mining

Page 1

<b>APD No</b>	<b>API WellNo</b>	<b>Status</b>	<b>Well Type</b>	<b>Surf Ownr</b>	<b>CBM</b>
527	43-047-39526-00-00		GW	S	No
<b>Operator</b>	KERR-MCGEE OIL & GAS ONSHORE, LP		<b>Surface Owner-APD</b>		
<b>Well Name</b>	NBU 1021-20G	<b>Unit</b>	NATURAL BUTTES		
<b>Field</b>	NATURAL BUTTES		<b>Type of Work</b>		
<b>Location</b>	SWNE 20 10S 21E S 2085 FNL 2264 FEL GPS Coord (UTM) 621874E 4421287N				

### Geologic Statement of Basis

The mineral rights for the proposed well are owned by the Federal Government. The BLM will be the agency responsible for evaluating and approving the drilling, casing and cement programs.

Brad Hill  
APD Evaluator

9/27/2007  
Date / Time

### Surface Statement of Basis

The general area is within the mid portion of the Cottonwood Wash Drainage of the Natural Buttes Unit located approximately 42 miles south and slightly west of Vernal, Utah. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 8 miles to the White River. No seeps, springs or streams exist in the area. An occasional pond collecting runoff for livestock and antelope occurs.

The NBU 1021-20G location is approximately 22.6 road miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within 0.1 miles of the proposed site. New construction will be required from this point.

The proposed gas well is on a flat with a very gentle slope to the north. No drainages intersect the location. Low ridges with exposed sandstone bedrock outcrops occur about 1/8 mile to the south. A shallow wide swale occurs to the northeast.

Both the surface and minerals are owned by SITLA. Jim Davis represented SITLA at the pre-site investigation. Mr. Davis had no concerns pertaining to this location. The selected location appears to be the best site for drilling and operating a well in the immediate area.

Floyd Bartlett  
Onsite Evaluator

9/19/2007  
Date / Time

### Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 20 mils with a felt subliner shall be properly installed and maintained in the reserve pit.

# ON-SITE PREDRILL EVALUATION

## Utah Division of Oil, Gas and Mining

**Operator** KERR-MCGEE OIL & GAS ONSHORE, LP  
**Well Name** NBU 1021-20G  
**API Number** 43-047-39526-0 **APD No** 527 **Field/Unit** NATURAL BUTTES  
**Location: 1/4,1/4 SWNE** **Sec** 20 **Tw** 10S **Rng** 21E 2085 FNL 2264 FEL  
**GPS Coord (UTM)** 621878 4421289 **Surface Owner**

### Participants

Floyd Bartlett (DOGM), Jim Davis (SITLA), Carroll Estes, Clay Einerson, Tony Kazeck, (Kerr McGee), Luke Kay (Uintah Engineering and Land Surveying), Daniel Emmitt and Ben Williams (UDWR).

### Regional/Local Setting & Topography

The general area is within the mid portion of the Cottonwood Wash Drainage of the Natural Buttes Unit located approximately 42 miles south and slightly west of Vernal, Utah. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 8 miles to the White River. No seeps, springs or streams exist in the area. An occasional pond collecting runoff for livestock and antelope occurs.

The NBU 1021-20G location is approximately 22.6 road miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within 0.1 miles of the proposed site. New construction will be required from this point.

The proposed gas well is on a flat with a very gentle slope to the north. No drainages intersect the location. Low ridges with exposed sandstone bedrock outcrops occur about 1/8 mile to the south. A shallow wide swale occurs to the northeast.

### Surface Use Plan

#### **Current Surface Use**

Grazing  
Recreational  
Wildlife Habitat

#### **New Road**

<b>Miles</b>	<b>Well Pad</b>		<b>Src Const Material</b>	<b>Surface Formation</b>
0.1	<b>Width</b> 308	<b>Length</b> 350	Onsite	UNTA

**Ancillary Facilities** N

### Waste Management Plan Adequate? Y

### Environmental Parameters

**Affected Floodplains and/or Wetland** N

#### **Flora / Fauna**

Poorly vegetated desert shrub type. Vegetation is consists of halogeton, cheatgrass, greasewood, curly mesquite, prickly pear and spring annuals are present.

Antelope, cattle, rabbits, coyotes, and small mammals, birds and raptors.

**Soil Type and Characteristics**

Deep gravely sandy loam.

**Erosion Issues** N

**Sedimentation Issues** N

**Site Stability Issues** N

**Drainage Diversion Required** N

**Berm Required?** N

**Erosion Sedimentation Control Required?** N

**Paleo Survey Run?** Y    **Paleo Potential Observed?** N    **Cultural Survey Run?** Y    **Cultural Resources?** N

**Reserve Pit**

<b>Site-Specific Factors</b>		<b>Site Ranking</b>
<b>Distance to Groundwater (feet)</b>	>200	0
<b>Distance to Surface Water (feet)</b>	>1000	0
<b>Dist. Nearest Municipal Well (ft)</b>	>5280	0
<b>Distance to Other Wells (feet)</b>	300 to 1320	10
<b>Native Soil Type</b>	Mod permeability	10
<b>Fluid Type</b>	Fresh Water	5
<b>Drill Cuttings</b>	Normal Rock	0
<b>Annual Precipitation (inches)</b>	<10	0
<b>Affected Populations</b>	<10	0
<b>Presence Nearby Utility Conduits</b>	Not Present	0
<b>Final Score</b>		<b>25</b>
		<b>1 Sensitivity Level</b>

**Characteristics / Requirements**

The proposed reserve pit is 100' x 150' x 10' deep located in a cut on the southeast corner of the location. A 20 mil liner with a felt sub-liner is planned by Kerr McGee.

**Closed Loop Mud Required?** N    **Liner Required?** Y    **Liner Thickness** 20    **Pit Underlayment Required?** Y

**Other Observations / Comments**

Daniel Emmett representing the UDWR was at the pre-site visit. He stated that the area is classified as critical yearlong habitat for antelope but that the lack of water not forage is the limiting factor adversely affecting the herd in the area. He recommended no restrictions for antelope. No other wildlife is expected to be significantly affected. He gave Jim Davis of SITLA and Carroll Estes of Kerr McGee a copy of his wildlife evaluation and a UDWR recommended seed mix to be used when re-vegetating the locations.

ATV's were used to access the site.

Floyd Bartlett  
**Evaluator**

9/19/2007  
**Date / Time**

# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

August 29, 2007

Memorandum

To: Assistant District Manager Minerals, Vernal District  
From: Michael Coulthard, Petroleum Engineer  
Subject: 2007 Plan of Development Natural Buttes Unit  
Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2007 within the Natural Buttes Unit, Uintah County, Utah.

API#	WELL NAME	LOCATION
------	-----------	----------

(Proposed PZ Wasatch/MesaVerde)

43-047-39523	NBU 921-14L Sec 14	T09S R21E 1489 FSL 0258 FWL
43-047-39524	NBU 1022-14A Sec 14	T10S R22E 1233 FNL 1317 FEL
43-047-39525	NBU 1021-20H Sec 20	T10S R21E 2186 FNL 0792 FEL
43-047-39526	NBU 1021-20G Sec 20	T10S R21E 2085 FNL 2264 FEL
43-047-39527	NBU 1021-20F Sec 20	T10S R21E 2086 FNL 1812 FWL
43-047-39528	NBU 1021-20E Sec 20	T10S R21E 1848 FNL 0732 FWL
43-047-39529	NBU 1021-20D Sec 20	T10S R21E 0718 FNL 0861 FWL
43-047-39530	NBU 1021-20B Sec 20	T10S R21E 1112 FNL 1923 FEL
43-047-39531	NBU 1021-200 Sec 20	T10S R21E 0604 FSL 1749 FEL
43-047-39532	NBU 1021-20L Sec 20	T10S R21E 2170 FSL 0943 FWL
43-047-39533	NBU 1021-20K Sec 20	T10S R21E 1868 FSL 1552 FWL
43-047-39534	NBU 1021-20J Sec 20	T10S R21E 1618 FSL 2195 FEL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - Natural Buttes Unit  
Division of Oil Gas and Mining  
Central Files  
Agr. Sec. Chron  
Fluid Chron

MCoulthard:mc:8-29-07

**From:** Ed Bonner  
**To:** Mason, Diana  
**Date:** 10/18/2007 3:01 PM  
**Subject:** Well Clearance

**CC:** Davis, Jim; Garrison, LaVonne; Hill, Brad; Hunt, Gil

The following wells have been given cultural resources clearance by the Trust Lands Cultural Resources Group:

Enduring Resources, LLC

- Hanging Rock 11-23-23-36 (API 43 047 39648)
- Hanging Rock 11-23-32-36 (API 43 047 39649)
- Hanging Rock 11-23-33-36 (API 43 047 39650)
- Hanging Rock 11-23-22-36 (API 43 047 39651)
- Hanging Rock 11-23-31-36 (API 43 047 39656)
- Hanging Rock 11-23-21-36 (API 43 047 39657)

Kerr McGee Oil & Gas Onshore LP

- NBU 1022-14A (API 43 047 39524)
- NBU 1021-20H (API 43 047 39525)
- NBU 1021-20G (API 43 047 39526)
- NBU 1021-20F (API 43 047 39527)
- NBU 1021-20E (API 43 047 39528)
- NBU 1021-20D (API 43 047 39529)
- NBU 1021-20B (API 43 047 39530)
- NBU 1021-20O (API 43 047 39531)
- NBU 1021-20L (API 43 047 39532)
- NBU 1021-20K (API 43 047 39533)
- NBU 1021-20J (API 43 047 39534)

Medallion Exploration

- Atchee Ridge 2-20 (API 43 047 39517)
- Atchee Ridge 11-20 (API 43 047 39518)
- Atchee Ridge 6-20 (API 43 047 39519)
- Atchee Ridge 7-20 (API 43 047 39520)
- Atchee Ridge 3-20 (API 43 047 39521)

If you have any questions regarding this matter please give me a call.



JON M. HUNTSMAN, JR.  
Governor

GARY R. HERBERT  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil Gas and Mining

JOHN R. BAZA  
Division Director

October 18, 2007

Kerr McGee Oil & Gas Onshore LP  
1368 S 1200 E  
Vernal, UT 84078

Re: NBU 1021-20G Well, 2085' FNL, 2264' FEL, SW NE, Sec. 20, T. 10 South, R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39526.

Sincerely,

Gil Hunt  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal Office  
SITLA

Operator: Kerr McGee Oil & Gas Onshore LP

Well Name & Number NBU 1021-20G

API Number: 43-047-39526

Lease: UTU-02278

Location: SW NE                      Sec. 20                      T. 10 South                      R. 21 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281    (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

6. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9


<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		5. LEASE DESIGNATION AND SERIAL NUMBER: <b>UTU-02278</b>
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: <b>N/A</b>
1. TYPE OF WELL      OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: <b>891008900A</b>
2. NAME OF OPERATOR: <b>Kerr-McGee Oil &amp; Gas Onshore, LP</b>		8. WELL NAME and NUMBER: <b>NBU 1021-20G</b>
3. ADDRESS OF OPERATOR: P.O. Box 173779      CITY <b>Denver</b> STATE <b>CO</b> ZIP <b>80217-3779</b>		9. API NUMBER: <b>4304739526</b>
4. LOCATION OF WELL FOOTAGES AT SURFACE: <b>2085' FNL &amp; 2264' FEL</b>		10. FIELD AND POOL, OR WILDCAT: <b>Natural Buttes Field</b>
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: <b>SWNE 20 10S 21E</b>		COUNTY: <b>Uintah</b>
		STATE: <b>UTAH</b>

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate)  Approximate date work will start: _____  <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only)  Date of work completion: _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/RESUME) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: <b>APD Extension</b>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, LP, respectfully requests a one year extension on this location in order to complete drilling operations. The Utah Division of Oil, Gas, and Mining initially approved this APD on 10/18/2007.

Approved by the  
Utah Division of  
Oil, Gas and Mining

Date: 10-15-08  
By: 

NAME (PLEASE PRINT) <b>Kevin McIntyre</b>	TITLE <b>Regulatory Analyst</b>
SIGNATURE 	DATE <b>10/13/2008</b>

(This space for State use only)

**COPY SENT TO OPERATOR**  
Date: 10.16.2008  
Initials: KS

(See Instructions on Reverse Side)

**RECEIVED**  
**OCT 14 2008**  
DIV. OF OIL, GAS & MINING

RESET

**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 4304739526  
**Well Name:** NBU 1021-20G  
**Location:** SWNE 2085' FNL & 2264' FEL, Sec. 20, T10S, R21E  
**Company Permit Issued to:** Kerr-McGee Oil & Gas Onshore, LP  
**Date Original Permit Issued:** 10/18/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes  No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes  No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes  No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes  No

Has the approved source of water for drilling changed? Yes  No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes  No

Is bonding still in place, which covers this proposed well? Yes  No

  
\_\_\_\_\_  
Signature

10/13/2008  
\_\_\_\_\_  
Date

Title: Regulatory Analyst

Representing: Kerr-McGee Oil & Gas Onshore, LP

RECEIVED

OCT 14 2008

DIV. OF OIL, GAS & MINING

RECEIVED  
VERNAL FIELD OFFICE

2007 AUG 16 PM 3:46

FORM APPROVED  
OMB No. 1004-0136  
Expires November 30, 2000

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. <b>UTU-02278</b>	
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator <b>KERR MCGEE OIL &amp; GAS ONSHORE LP</b>		7. If Unit or CA Agreement, Name and No. <b>UNIT #891008900A</b>	
3A. Address <b>1368 SOUTH 1200 EAST VERNAL, UT 84078</b>		8. Lease Name and Well No. <b>NBU 1021-20G</b>	
3b. Phone No. (include area code) <b>(435) 781-7024</b>		9. API Well No. <b>43-047-39526</b>	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface <b>SW/NE 2085'FNL, 2264'FEL</b> At proposed prod. Zone		10. Field and Pool, or Exploratory <b>NATURAL BUTTES</b>	
14. Distance in miles and direction from nearest town or post office* <b>22.6 MILES SOUTHEAST OF OURAY, UTAH</b>		11. Sec., T., R., M., or Blk. and Survey or Area <b>SEC. 20, T10S, R21E</b>	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>2085'</b>	16. No. of Acres in lease <b>1440.00</b>	17. Spacing Unit dedicated to this well <b>40.00</b>	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>REFER TO TOPO C</b>	19. Proposed Depth <b>9450'</b>	20. BLM/BIA Bond No. on file <b>BOND NO: WYB000291</b>	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>5193'GL</b>	22. Approximate date work will start*	23. Estimated duration	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized office.

25. Signature 	Name (Printed/Typed) <b>SHEILA UPCHEGO</b>	Date <b>8/8/2007</b>
Title <b>SENIOR LAND ADMIN SPECIALIST</b>		
Approved by (Signature) 	Name (Printed/Typed) <b>Jerry Kevick</b>	Date <b>DEC 04 2008</b>
Title <b>Assistant Field Manager Lands &amp; Mineral Resources</b>	Office <b>VERNAL FIELD OFFICE</b>	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

RECEIVED

DEC 30 2008

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

DIV. OF OIL, GAS & MINING

07PP 1159A

NOS 1/10/07

UPB6M



**UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
VERNAL FIELD OFFICE**



170 South 500 East

VERNAL, UT 84078

(435) 781-4400

**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL**

**Company:** Kerr McGee Oil & Gas  
**Well No:** NBU 1021-20G  
**API No:** 43-047-39526

**Location:** SWNE, Sec.20,T10S,R21E  
**Lease No:** UTU-02278  
**Agreement:** Natural Buttes Unit

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
Supervisory NRS:	Karl Wright	(435) 781-4484	
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544
NRS/Enviro Scientist:	James Hereford	(435) 781-3412	(435) 828-3546
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Dan Emmett	(435) 781-3414	(435) 828-4029
NRS/Enviro Scientist:	Paul Percival	(435) 781-4493	(435) 828-7381
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545
NRS/Enviro Scientist:	David Gordon	(435) 781-4424	

**Fax: (435) 781-3420**

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR  
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

**NOTIFICATION REQUIREMENTS**

Location Construction (Notify Environmental Scientist)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	- Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)***

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

**SITE SPECIFIC CONDITIONS OF APPROVAL**

- NBU 1021-20K will have drainage diverted around pad
- Conditions as set forth by the surface owners and/or agencies.
- Surface conditions of approval are contained in the surface use plan of the APD.

**DOWNHOLE PROGRAM  
CONDITIONS OF APPROVAL (COAs)**

**SITE SPECIFIC DOWNHOLE COAs:**

- NBU 1021-20K will have drainage diverted around pad.
- Conditions as set forth by the surface owners and/or agencies.
- Surface conditions of approval are contained in the surface use plan of the APD.

**All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to.** The following items are emphasized:

**DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS**

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of

each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to [UT\\_VN\\_Welllogs@BLM.gov](mailto:UT_VN_Welllogs@BLM.gov). This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

## OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
  - Operator name, address, and telephone number.
  - Well name and number.
  - Well location (¼¼, Sec., Twn, Rng, and P.M.).
  - Date well was placed in a producing status (date of first production for which royalty will be paid).
  - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
  - Unit agreement and/or participating area name and number, if applicable.
  - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.



JON M. HUNTSMAN, JR.  
Governor

GARY R. HERBERT  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

February 24, 2009

Raleen White  
Anadarko Petroleum Corp.  
PO Box 173779  
Denver, CO 80217-3779

43 047 3915 26  
NBU 1021-20G  
10S 21E 20

Re: APDs Rescinded at the request of Anadarko Petroleum Corp.


Dear Ms. White:

Enclosed find the list of APDs that you requested to be rescinded to Anadarko Petroleum Corp. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective February 20, 2009.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject locations.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

  
Diana Mason  
Environmental Scientist

cc: Well File  
Bureau of Land Management, Vernal  
SITLA, Ed Bonner

43047395730000	FEDERAL 1021-23P	10S	21E	23	SESE
43047395770000	FEDERAL 1021-25I	10S	21E	25	NESE
43047395760000	FEDERAL 1021-25M	10S	21E	25	SWSW
43047397930000	Federal 1021-25N	10S	21E	25	SESW
43047395810000	FEDERAL 1021-34K	10S	21E	34	NESW
43047395520000	FEDERAL 1021-34M	10S	21E	34	SWSW
43047395560000	FEDERAL 1021-34P	10S	21E	34	SESE
43047389890000	FEDERAL 1021-35F	10S	21E	35	SENW
43047389760000	FEDERAL 1021-35G	10S	21E	35	SWNE
43047389380000	FEDERAL 1021-35H	10S	21E	35	SENE
43047389350000	FEDERAL 1021-35I	10S	21E	35	NESE
43047389330000	FEDERAL 1021-35P	10S	21E	35	SESE
43047389370000	FEDERAL 1021-35A	10S	21E	35	NENE
43047365050000	LOVE 1121-2B	11S	21E	02	NWNE
43047394050000	LOVE UNIT 1121-10NT	11S	21E	10	SESW
43047393910000	LOVE UNIT 1121-3NT	11S	21E	03	SWSW
43047388240000	LOVE UNIT 1122-18C	11S	22E	18	NENW
43047388250000	LOVE UNIT 1122-18J	11S	22E	18	NWSE
43047388260000	LOVE UNIT 1122-18K	11S	22E	18	NESW
43047396050000	LOVE UNIT 1122-18L	11S	22E	18	NWSW
43047396030000	LOVE UNIT 1122-19C	11S	22E	19	NENW
43047386310000	MULLIGAN 823-23H	08S	23E	23	SENE
43047387130000	MULLIGAN 823-24O	08S	23E	24	SWSE
43047393730000	NBU 1020-1KT	10S	20E	01	NESW
43047393740000	NBU 1020-24BT	10S	20E	24	NWNE
43047393760000	NBU 1021-11I	10S	21E	11	NESE
43047393800000	NBU 1021-11M	10S	21E	11	SWSW
43047393790000	NBU 1021-11P	10S	21E	11	SESE
4304739383	NBU 1021-12A	10S	21E	12	NENE
43047393860000	NBU 1021-12L - STATE	10S	21E	12	NWSW
43047393840000	NBU 1021-12N	10S	21E	12	SESW
43047395470000	NBU 1021-15F	10S	21E	15	SENW
43047395460000	NBU 1021-15L	10S	21E	15	NWSW
43047395630000	NBU 1021-15P	10S	21E	15	SESE
43047395260000	NBU 1021-20G STATE/FED	10S	21E	20	SWNE
43047395340000	NBU 1021-20J STATE/FED	10S	21E	20	NWSE
43047395330000	NBU 1021-20K STATE/FED	10S	21E	20	NESW
43047395320000	NBU 1021-20L STATE/FED	10S	21E	20	NWSW
43047395310000	NBU 1021-20O STATE/FED	10S	21E	20	SWSE
43047375280000	NBU 1021-21C (FKA C275)	10S	21E	21	NENW
43047367020000	NBU 1021-21H	10S	21E	21	SENE
43047395500000	NBU 1021-22A	10S	21E	22	NENE
43047394030000	NBU 1021-23FT	10S	22E	23	SENW
43047395600000	NBU 1021-23L	10S	21E	23	NWSW
43047395780000	NBU 1021-25F	10S	21E	25	SENW
43047395750000	NBU 1021-25J	10S	21E	25	NWSE
43047395610000	NBU 1021-25K	10S	21E	25	NESW

4304739580000	NBU 1021-26D	10S	21E	26	NWNW
43047395790000	NBU 1021-26E	10S	21E	26	SWNW
43047379680000	NBU 1021-6C	10S	21E	06	NENW LOT 3
43047379670000	NBU 1021-6D	10S	21E	06	NWNW LOT 4
43047379410000	NBU 1021-7B	10S	21E	07	NWNE
43047401850000	NBU 921-31BT	09S	21E	31	NWNE
43047363950000	NBU 921-33K	09S	21E	33	NESW
4304740038	HATCH 923-13A	09S	23E	13	NENE
4304740060	HATCH 923-13ED	09S	23E	13	SWNW
4304740059	HATCH 923-13O	09S	23E	13	SWSE
4304740061	HATCH 923-14M	09S	23E	14	SWSW
4304740143	HATCH 923-14O	09S	23E	14	SWSE
4304740064	HATCH 923-15B	09S	23E	15	NWNE
4304740062	HATCH 923-15L	09S	23E	15	NWSW
4304740063	HATCH 923-15P	09S	23E	15	SESE
4304740065	HATCH 923-24O	09S	23E	24	SWSE
4304740069	HATCH 923-25A	09S	23E	25	NENE
4304740068	HATCH 923-25I	09S	23E	25	NESE
4304740070	HATCH 923-25O	09S	23E	25	SWSE
43047388010000	FEDERAL 1022-15H	10S	22E	15	SENE
4304739388	FEDERAL 1022-15K	10S	22E	15	NESW
43047389240000	FEDERAL 1022-15L	10S	22E	15	NWSW

LA

# United States Department of the Interior



BUREAU OF LAND MANAGEMENT  
Green River District-Vernal Field Office  
170 South 500 East  
Vernal, UT 84078  
(435) 781-4400 Fax: (435) 781-4410  
<http://www.blm.gov/ut/st/en/fo/vernal.html>

IN REPLY REFER TO:  
3160  
UTG011

August 12, 2009

Raleen White  
Kerr McGee Oil & Gas Onshore LP  
PO Box 173779  
Denver, CO 80217-3779

Re: **43 047 39526**  
Request to Rescind APD  
Well No. NBU 1021-20G  
SWNE, Sec. 20, T10S, R21E  
Uintah County, Utah  
Lease No. 02278  
Natural Buttes Unit

Dear Ms. White:

The Application for Permit to Drill (APD) for the above-referenced well was approved on December 4, 2008. This office received an email message from you on February 20, 2009 requesting that the APD approval be rescinded. In view of the foregoing, this office is rescinding its approval of the referenced Application for Permit to Drill per your request. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

If you have any questions regarding this matter, please contact me at (435) 781-4440.

Sincerely,

Jerry Kenczka  
Assistant Field Manager  
Lands & Minerals Resources

cc: UDOGM

**RECEIVED**

**AUG 27 2009**

**DIV. OF OIL, GAS & MINING**