

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3
AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL				1. WELL NAME and NUMBER Natural Buttes Unit 359-13E		
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>				3. FIELD OR WILDCAT NATURAL BUTTES		
4. TYPE OF WELL Gas Well Coalbed Methane Well: NO				5. UNIT or COMMUNITIZATION AGREEMENT NAME NATURAL BUTTES		
6. NAME OF OPERATOR EOG Resources, Inc.				7. OPERATOR PHONE 435 781-9111		
8. ADDRESS OF OPERATOR 1060 East Highway 40, Vernal, UT, 84078				9. OPERATOR E-MAIL kaylene_gardner@eogresources.com		
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU4485		11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		
13. NAME OF SURFACE OWNER (if box 12 = 'fee') F				14. SURFACE OWNER PHONE (if box 12 = 'fee')		
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee') ,, UT				16. SURFACE OWNER E-MAIL (if box 12 = 'fee')		
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')		18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>		
20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	661 FSL 2149 FEL	SWSE	13	10.0 S	20.0 E	S
Top of Uppermost Producing Zone	661 FSL 2149 FEL	SWSE	13	10.0 S	20.0 E	S
At Total Depth	661 FSL 2149 FEL	SWSE	13	10.0 S	20.0 E	S
21. COUNTY UINTAH		22. DISTANCE TO NEAREST LEASE LINE (Feet) 661		23. NUMBER OF ACRES IN DRILLING UNIT 680		
27. ELEVATION - GROUND LEVEL 5160		25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1100		26. PROPOSED DEPTH MD: 6357 TVD: 6357		
		28. BOND NUMBER 6196017		29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 49-225		

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORCANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP


NAME Kaylene Gardner	TITLE Lead Regulatory Assistant	PHONE 435 781-9111
SIGNATURE	DATE 02/29/2008	EMAIL kaylene_gardner@eogresources.com


API NUMBER ASSIGNED 43047500320000

APPROVAL

Approved by the
Utah Division of
Oil, Gas and Mining

618647X
44220744
39.942367
-109.611262

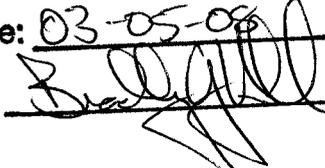
Date: 03-05-08
By: 

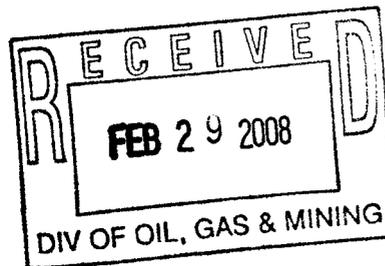

*Federal Approval of this
Action is Necessary*

T10S, R20E, S.L.B.&M.

R
20
E

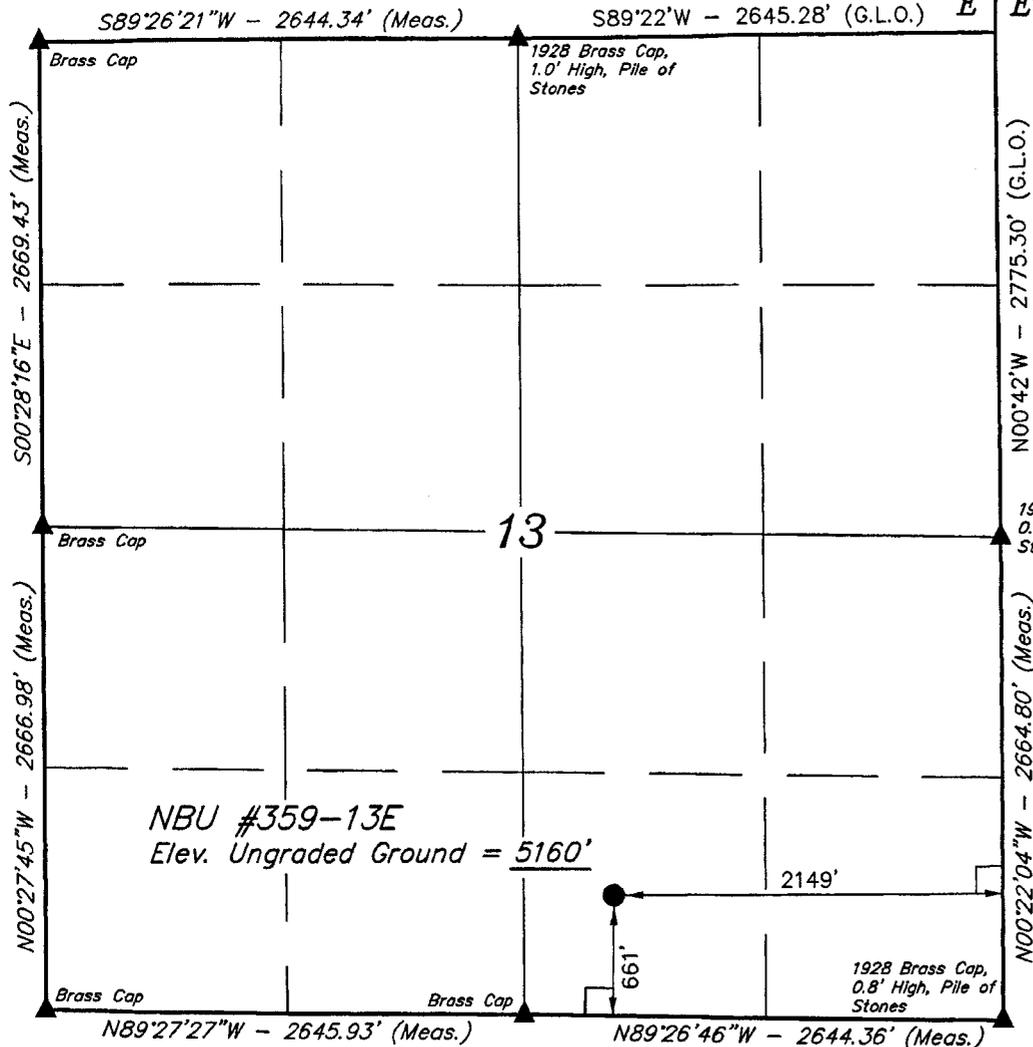


EOG RESOURCES, INC.

Well location, NBU #359-13E, located as shown in the SW 1/4 SE 1/4 of Section 13, T10S, R20E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

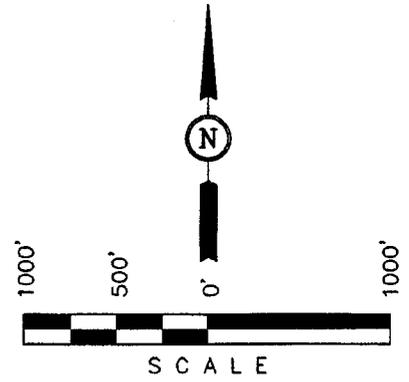

CERTIFICATE OF SURVEY
 THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY SUPERVISION AND THAT THE BEARINGS AND DISTANCES ARE CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.
 ROBERT L. ...
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 63319
 STATE OF UTAH

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(NAD 83)
 LATITUDE = 39°56'32.37" (39.942325)
 LONGITUDE = 109°36'43.01" (109.611947)
 (NAD 27)
 LATITUDE = 39°56'32.50" (39.942361)
 LONGITUDE = 109°36'40.53" (109.611258)

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 1-11-08	DATE DRAWN: 1-16-08
PARTY D.S. E.D. C.P.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE EOG RESOURCES, INC.	

Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Cond	17.5	13.375	0	45		
Pipe	Grade	Length	Weight			
	H-40S	40	48.0			
	Cement Interval	Top (MD)	Bottom (MD)			
		0	45			
		Cement Description	Class	Sacks	Yield	Weight
			G	0	0.0	0.0


Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	9.625	0	2300		
Pipe	Grade	Length	Weight			
	J-55S	2300	36.0			
	Cement Interval	Top (MD)	Bottom (MD)			
		0	2300			
		Cement Description	Class	Sacks	Yield	Weight
			G	185	3.82	11.0

Proposed Hole, Casing, and Cement


String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	4.5	2300	6357		
Pipe	Grade	Length	Weight			
	N-80L	6357	11.6			
	Cement Interval	Top (MD)	Bottom (MD)			
		2300	6357			
		Cement Description	Class	Sacks	Yield	Weight
			HG	115	3.91	11.0
			50	427	1.28	14.1

**EOG RESOURCES 11" 5,000 PSI W.P. BOP
CONFIGURATION**

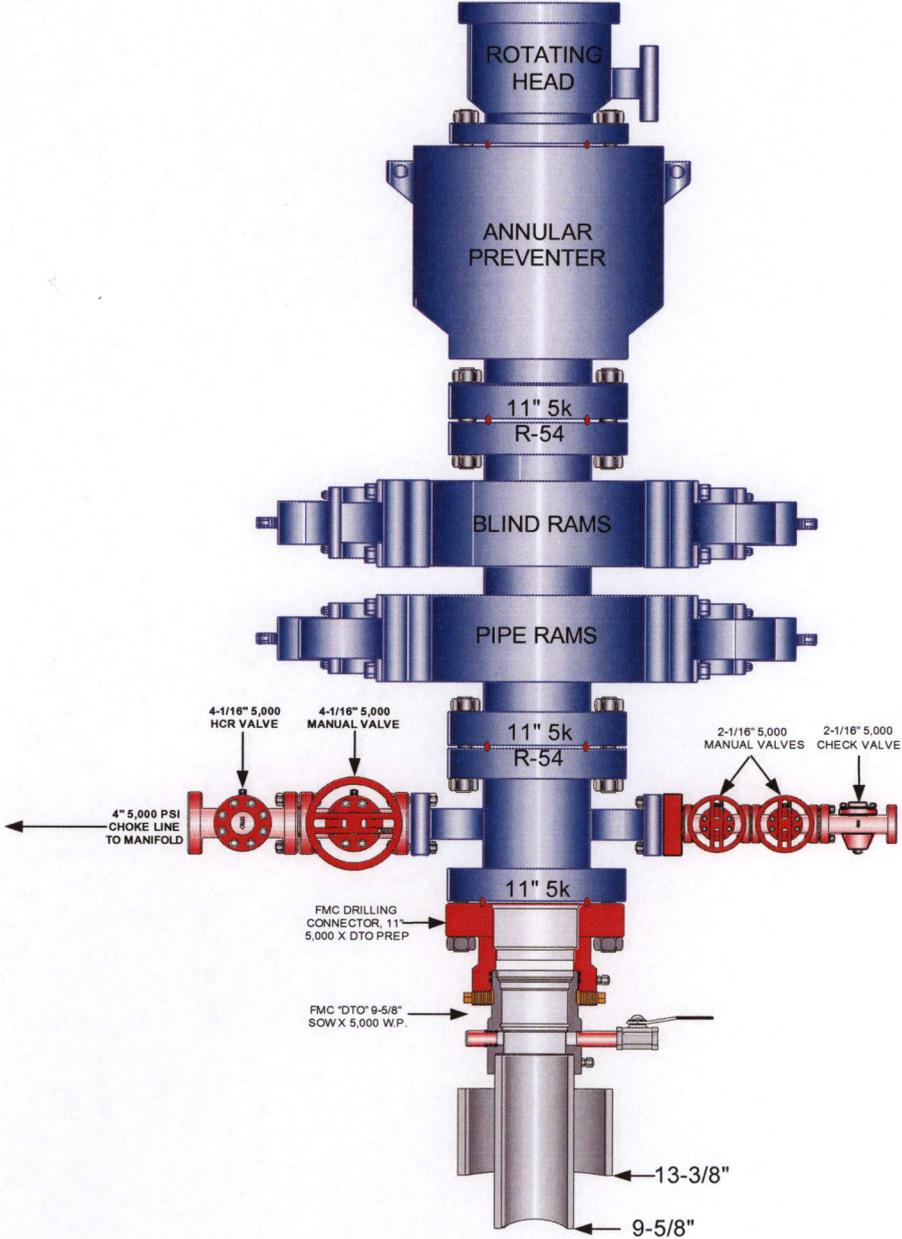

**EOG RESOURCES CHOKE MANIFOLD CONFIGURATION
W/ 5,000 PSI WP VALVES**

PAGE 2 OF 2

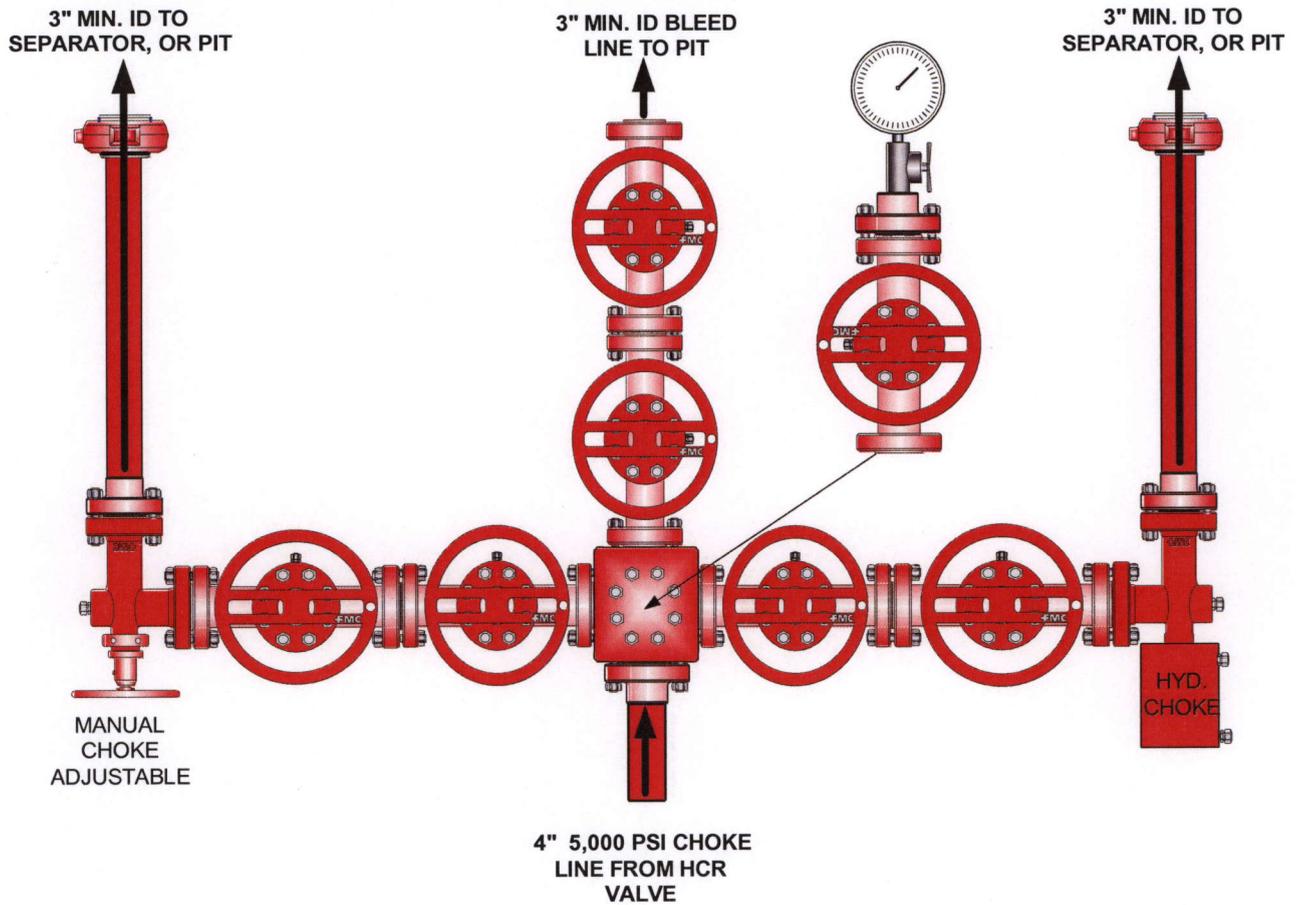

Testing Procedure:

1. BOP will be tested with a professional tester to conform to Onshore Order #2.
2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
3. Annular Preventer will be tested to 50% working pressure, 2,500 psi.
Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, **whichever is greater.**
4. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements.

EIGHT POINT PLAN

NATURAL BUTTES UNIT 359-13E
SW/SE, SEC. 13, T10S, R20E, S.L.B.&M..
UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	TVD-RKB (ft)	Objective	Lithology	
Green River	1,136		Shale	
Wasatch	4,395	Primary	Sandstone	Gas
Chapita Wells	5,007	Primary	Sandstone	Gas
Buck Canyon	5,722	Primary	Sandstone	Gas
TD	6,357			

Estimated TD: **6,357' or 200'± below TD** **Anticipated BHP: 3,471 Psig**

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

3. PRESSURE CONTROL EQUIPMENT: Production Hole – 5000 Psig
 BOP schematic diagrams attached.

4. CASING PROGRAM:

CASING	Hole Size	Length	Size	WEIGHT	Grade	Thread	Rating Collapse	Factor Burst	Tensile
Conductor	17 ½"	0 – 45'	13 ¾"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
Surface	12 ¼"	0' – 2,300' KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
Production	7-7/8"	Surface – TD	4-½"	11.6#	N-80	LTC	6350 PSI	7780 Psi	233,000#

Note: 12-¼" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone.

All casing will be new or inspected.

EIGHT POINT PLAN

NATURAL BUTTES UNIT 359-13E
SW/SE, SEC. 13, T10S, R20E, S.L.B.&M..
UINTAH COUNTY, UTAH

5. Float Equipment:

Surface Hole Procedure (0'- 2300'±)

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface. (15 total)

Production Hole Procedure (2300'± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-½", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (Surface - 2300'±):

Air/air mist or aerated water.

Production Hole Procedure (2300'± - TD): Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

2300'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Defloculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

EIGHT POINT PLAN

NATURAL BUTTES UNIT 359-13E
SW/SE, SEC. 13, T10S, R20E, S.L.B.&M..
UINTAH COUNTY, UTAH

1. VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 1
Onshore Oil and Gas Order No. 2 – Section E: Special Drilling Operations

- EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line to be 100' in length. (Where possible, a straight run blooie line will be used).
- EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be approximately 75' in length.
- EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring dedusting equipment. Dust during air drilling operations is controlled by water mist.
- EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring an automatic igniter or continuous pilot light on the blooie line. (Not required on aerated water system).
- EOG Resources, Inc. requests a variance that compressors are located in the opposite direction from the blooie line a minimum of 100 feet from the well bore. (Air Compressors are rig mounted).

8. EVALUATION PROGRAM:

Logs: Mud log from base of surface casing to TD.
Cased-hole Logs: Cased-hole logs will be run in lieu of open-hole logs consisting of the following:
Cement Bond / Casing Collar Locator and Pulsed Neutron

EIGHT POINT PLAN

NATURAL BUTTES UNIT 359-13E
SW/SE, SEC. 13, T10S, R20E, S.L.B.&M..
UINTAH COUNTY, UTAH

9. CEMENT PROGRAM:

Surface Hole Procedure (Surface - 2300'±):

Lead: 185 sks Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl₂, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft³/sk. yield, 23 gps water.

Tail: 207 sks Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Top Out: As necessary with Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Note: Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.

Production Hole Procedure (2300'± - TD)

Lead: 115 sks: Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44 (Salt), 0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29 (cello flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water.

Tail: 427 sks: 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9 gps water.

Note: The above number of sacks is based on gauge-hole calculation.
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.

Final Cement volumes will be based upon gauge-hole plus 45% excess.

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 2300'±):

Lost circulation

Production Hole (2300'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

EIGHT POINT PLAN

NATURAL BUTTES UNIT 359-13E
SW/SE, SEC. 13, T10S, R20E, S.L.B.&M..
UINTAH COUNTY, UTAH

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

13. Air Drilling Operations:

- 1. Main Air Compressors are 1250 CFM 350 psi with 2000 psi Boosters and are rig mounted.
- 2. Secondary Air Compressors are 1170 CFM 350 psi with 2000 psi Boosters and are rig mounted.
- 3. Minimum setting depth of conductor casing will be 60' GL or 10'± into competent formation, whichever is deeper, as determined by the EOG person in charge. Exceptions must be approved by an EOG drilling superintendent or manager.
- 4. The diameter of the diverter flow line will be a minimum of 10" to help reduce back pressure on the well bore during uncontrolled flow.
- 5. Rat and Mouse hole drilling will occur only after surface casing has been set and cemented.
- 6. EOG Resources, Inc. will use a properly maintained and lubricated stripper head.

(Attachment: BOP Schematic Diagram)



***Natural Buttes Unit 359-13E
SWSE, Section 13, T10S, R20E
Uintah County, Utah***

SURFACE USE PLAN

1. EXISTING ROADS:

- A. See attached Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 43.4 miles south of Vernal, Utah – See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary.

2. PLANNED ACCESS ROAD:

- A. The access road will be approximately 50' in length. See attached Topo B.
- B. The access road has a 40-foot ROW w/18 foot running surface.
- C. Maximum grade of the new access road will be 8 percent.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.
- I. A 40-foot permanent right-of-way is requested. No surfacing material will used.
- J. No additional storage areas will be needed for storing equipment, stockpiling, or vehicle parking.

All travel will be confined to existing access road rights-of-way.

New or reconstructed roads will be centerlined – flagged at time of location staking.

The road shall be constructed/upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 40 foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

Traveling off the 40 foot right-of-way will not be allowed. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Third Edition, and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction. During the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and drainage ditches and culverts will be kept clear and free flowing.

3. LOCATION OF EXISTING WELLS WITHIN A ONE-MILE RADIUS:

See attached TOPO map "C" for the location of wells within a one-mile radius.

4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:

A. On Well Pad

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, two (2) 400-bbl vertical tanks and attaching piping.
2. Gas gathering lines – A 4" gathering line will be buried from dehy to the edge of the location.

B. Off Well Pad

1. Proposed pipeline will transport natural gas.
2. The pipeline will be a permanent feeder line.
3. The length of the proposed pipeline is 1895' x 40'. The proposed pipeline leave northerly then easterly direction for an approximate distance of 1895' tying into an existing pipeline in the SESE of Section 13, T10S, R20E. Pipe will be 4" NOM, 0.156 wall, Grade X42, Zap-Lock, electric weld with a 35 mil X-Tru coating.

4. Proposed pipeline will be a 4" OD steel, zap-lok line laid on the surface
5. Proposed pipeline will be laid on surface.
6. Pipeline will be coupled using the Zap lock method. No additional off-pad facilities will be required.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. **All facilities will be painted with Carlsbad Canyon.** Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

5. LOCATION AND TYPE OF WATER SUPPLY:

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Bonanza Power Plant water source in Sec 26, T8S, R23E Uintah County, UT (State Water Right # 49-225(A31368)). Water will be hauled by a licensed trucking company.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIALS:

- A. All construction material for this pipeline will be of native borrow and soil accumulated during the construction of the location.
- B. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL:

A. METHODS AND LOCATION

1. Cuttings will be confined in the reserve pit.
2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at

one of the following locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, CWU 550-30N SWD, CWU 2-29 SWD, Red Wash Evaporation Ponds, 1, 2, 3, 4, 5, or 6, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.

B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or by removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with felt and a 16 millimeter plastic liner. Sufficient bedding (i.e. weed free straw, or hay; felt; polyswell or soil) to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the A.O.

EOG Resources, Inc. maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances which are used during the course of construction, drilling, completion, and production operations for this project. Hazardous materials (substances) which may be found at the site may include drilling mud and cementing products which are primarily inhalation hazards, fuels (flammable and/or combustible), materials that may be necessary for well completion/ stimulation activities such as flammable or combustible substances and acids/gels (corrosives). The opportunity for Superfund Amendments and Reauthorization Act (SARA) listed Extremely Hazardous Substances (EHS) at the site is generally limited to proprietary treating chemicals. All hazardous and EHS and commercial preparations will be handled in an appropriate manner to minimize the potential for leaks or spills to the environment.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will not be used, produced, stored, transported, or disposed of in association with the drilling, testing or completion of the well.

8. ANCILLARY FACILITIES:

None anticipated.

9. WELL SITE LAYOUT:

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the west corner of the location. The flare pit will be located downwind of the prevailing wind direction on the west side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil (first six inches) will be stored separate from the location topsoil. The stockpiled location topsoil will be stored in a location providing easy access for interim reclamation and protection of the topsoil. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture from this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the south.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.)
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distances between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently counted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RECLAMATION OF THE SURFACE:

A. Interim Reclamation (Producing Location)

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours – See attached Figure #3. The reserve pit will be reclaimed within 90 days from the date of the well completion, or as soon as environmental conditions allow. Before any dirt takes place, the reserve pit must be completely dry and free of all foreign obstacles.

The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

B. Dry Hole/Abandoned Location

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriated surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP:

Surface ownership of the proposed well site, access road, and pipeline route is as follows:

State of Utah

12. OTHER INFORMATION:

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the Authorized Officer. Within five working days the Authorized Officer will inform the operator as to:

- Whether the materials appear eligible for the National Register of Historic Places;
- The mitigation measures the operator will likely have to undertake before the site can be used.
- A time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

- D. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice of Lessees. The operator is fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Construction activity will not be conducted using frozen or saturated soils material or during periods when watershed damage is likely to occur.

If the existing access road, proposed access road, and proposed pad are dry during construction, drilling, and completion activities, water will be applied, as needed, to help facilitate compaction during construction and to minimize soil loss as a result of wind erosion.

A cultural resources and paleontology survey will be conducted and submitted by Montgomery Archaeological Consultants.

LESSEE OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

PERMITTING AGENT

Kaylene R. Gardner
EOG Resources, Inc.
P.O. Box 1815
Vernal, Ut 84078
(435) 781-9111

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

CERTIFICATION:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Please be advised that EOG Resources, Inc. is considered to be the operator of the Natural Buttes Unit 359-13E Well, located in the SWSE, of Section 13, T10S, R20E, Uintah County, Utah; State land and minerals; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is under Bond # NM 2308.

February 28, 2008 _____
Date

Kaylene R. Gardner, Lead Regulatory Assistant

EOG RESOURCES, INC
NBU #359-13E
SECTION 13, T10S, R20E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 12.1 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN A EASTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTH; FOLLOW ROAD FLAGS IN A NORTHERLY DIRECTION APPROXIMATELY 50' TO THE TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 43.4 MILES.

T10S, R20E, S.L.B.&M.

R
20
E



R
21
E

EOG RESOURCES, INC.

Well location, NBU #359-13E, located as shown in the SW 1/4 SE 1/4 of Section 13, T10S, R20E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

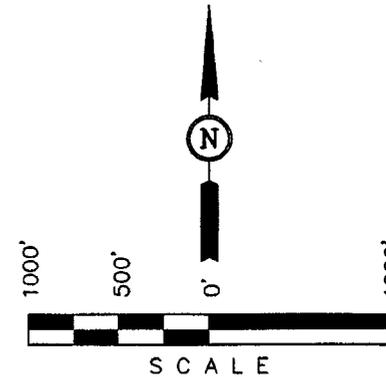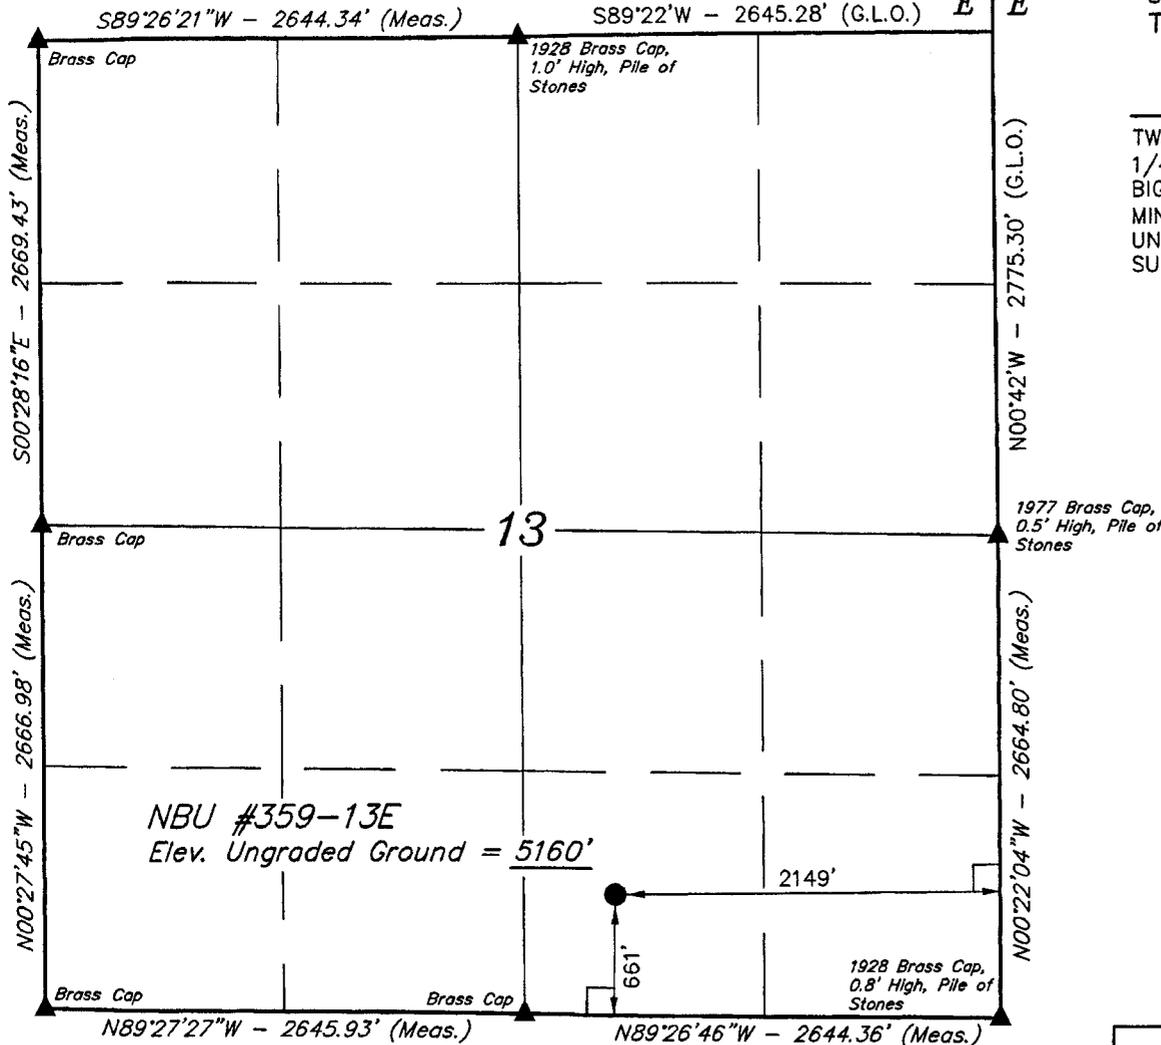

CERTIFICATE
 THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(NAD 83)
 LATITUDE = 39°56'32.37" (39.942325)
 LONGITUDE = 109°36'43.01" (109.611947)
 (NAD 27)
 LATITUDE = 39°56'32.50" (39.942361)
 LONGITUDE = 109°36'40.53" (109.611258)

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 1-11-08	DATE DRAWN: 1-16-08
PARTY D.S. E.D. C.P.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE EOG RESOURCES, INC.	

EOG RESOURCES, INC.


FIGURE #1

LOCATION LAYOUT FOR

NBU #359-13E
SECTION 13, T10S, R20E, S.L.B.&M.
661' FSL 2149' FEL

Approx.
Top of
Cut Slope

F-0.5'
El. 60.6'

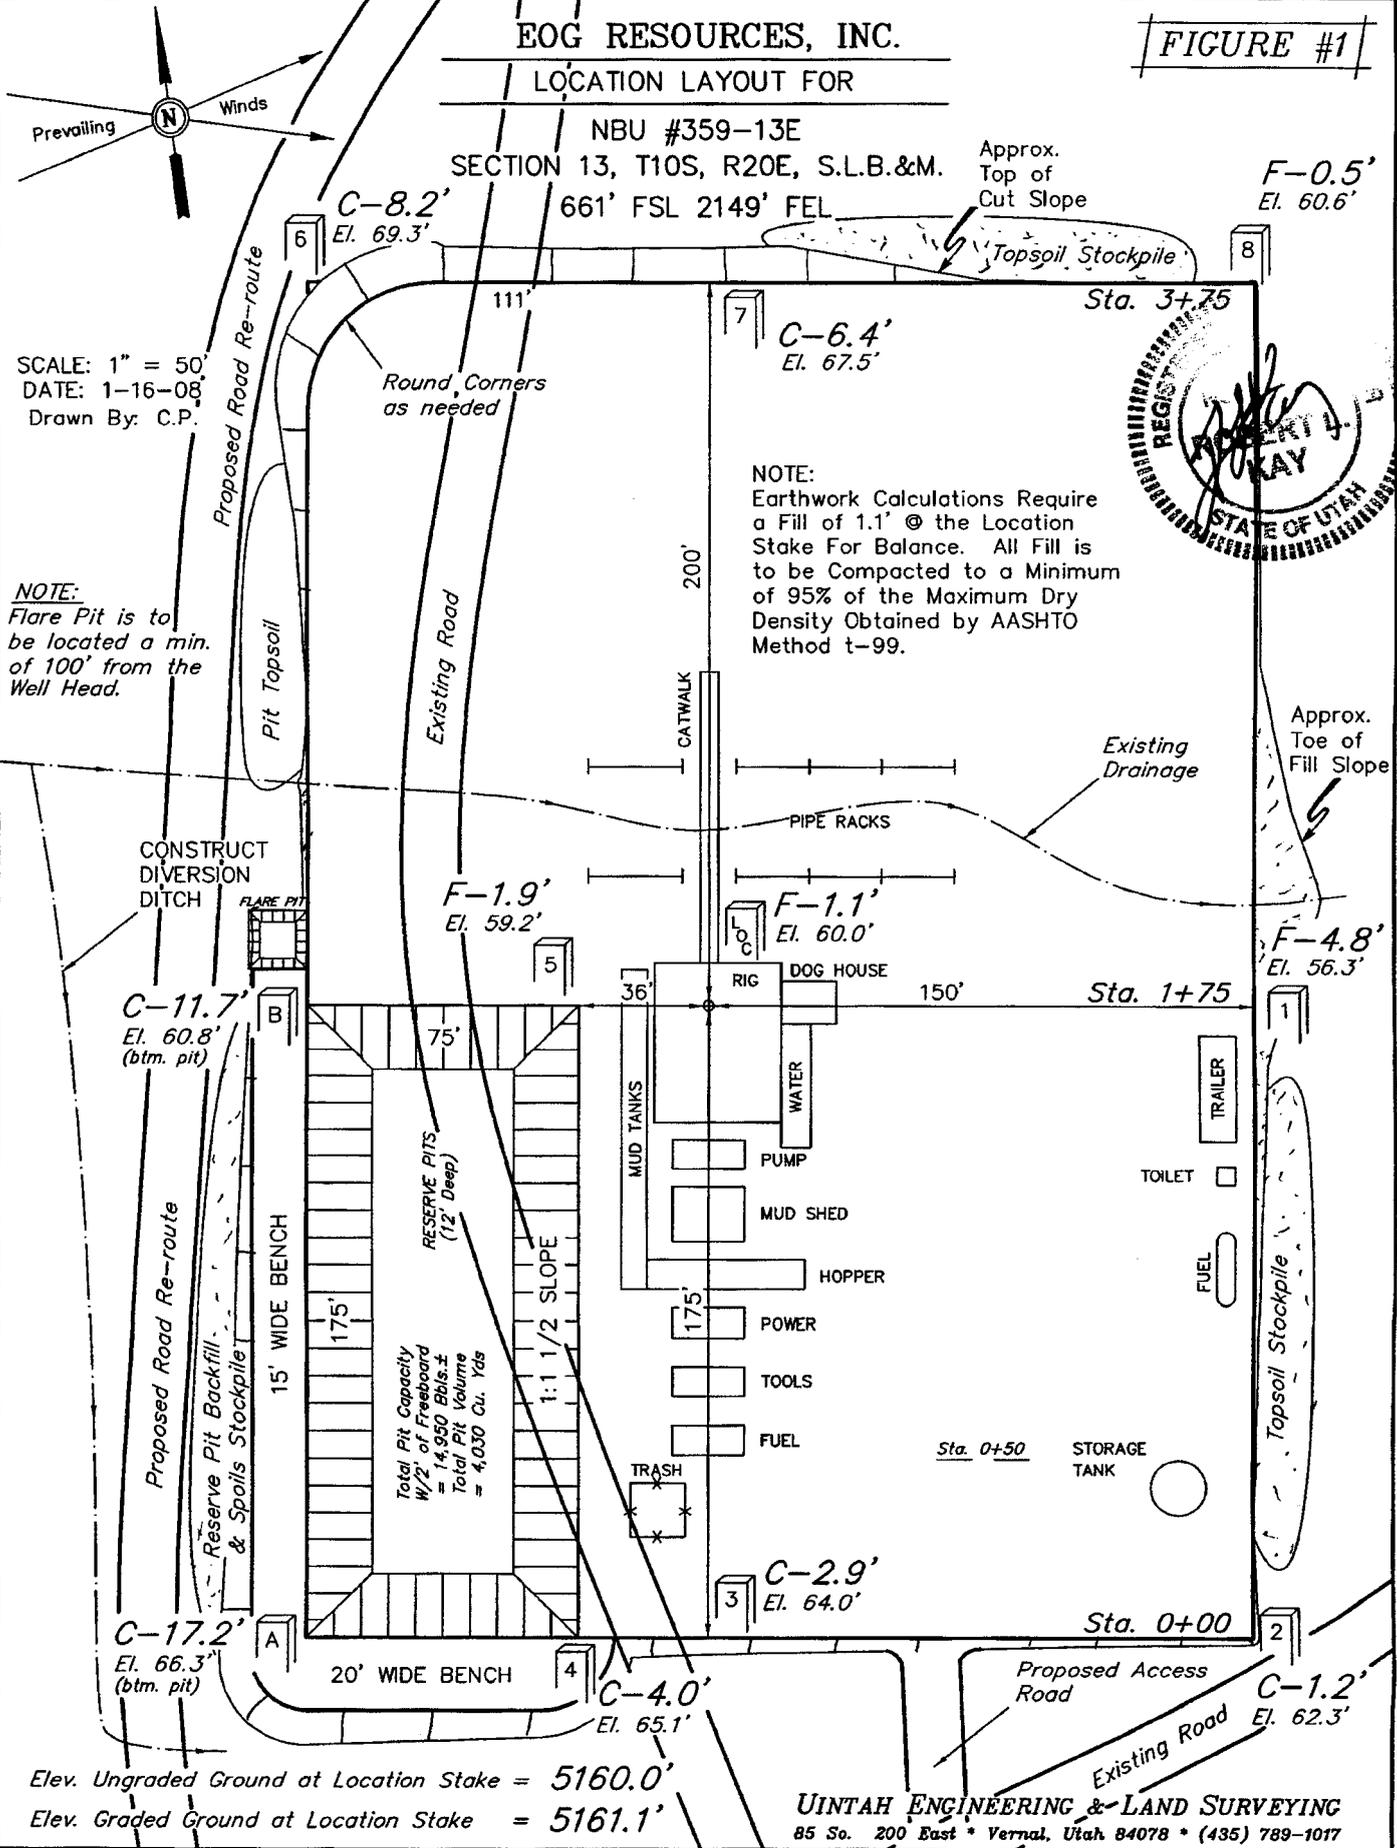

SCALE: 1" = 50'
DATE: 1-16-08
Drawn By: C.P.


NOTE:
Flare Pit is to
be located a min.
of 100' from the
Well Head.

NOTE:
Earthwork Calculations Require
a Fill of 1.1' @ the Location
Stake For Balance. All Fill is
to be Compacted to a Minimum
of 95% of the Maximum Dry
Density Obtained by AASHTO
Method t-99.



Elev. Ungraded Ground at Location Stake = 5160.0'
Elev. Graded Ground at Location Stake = 5161.1'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

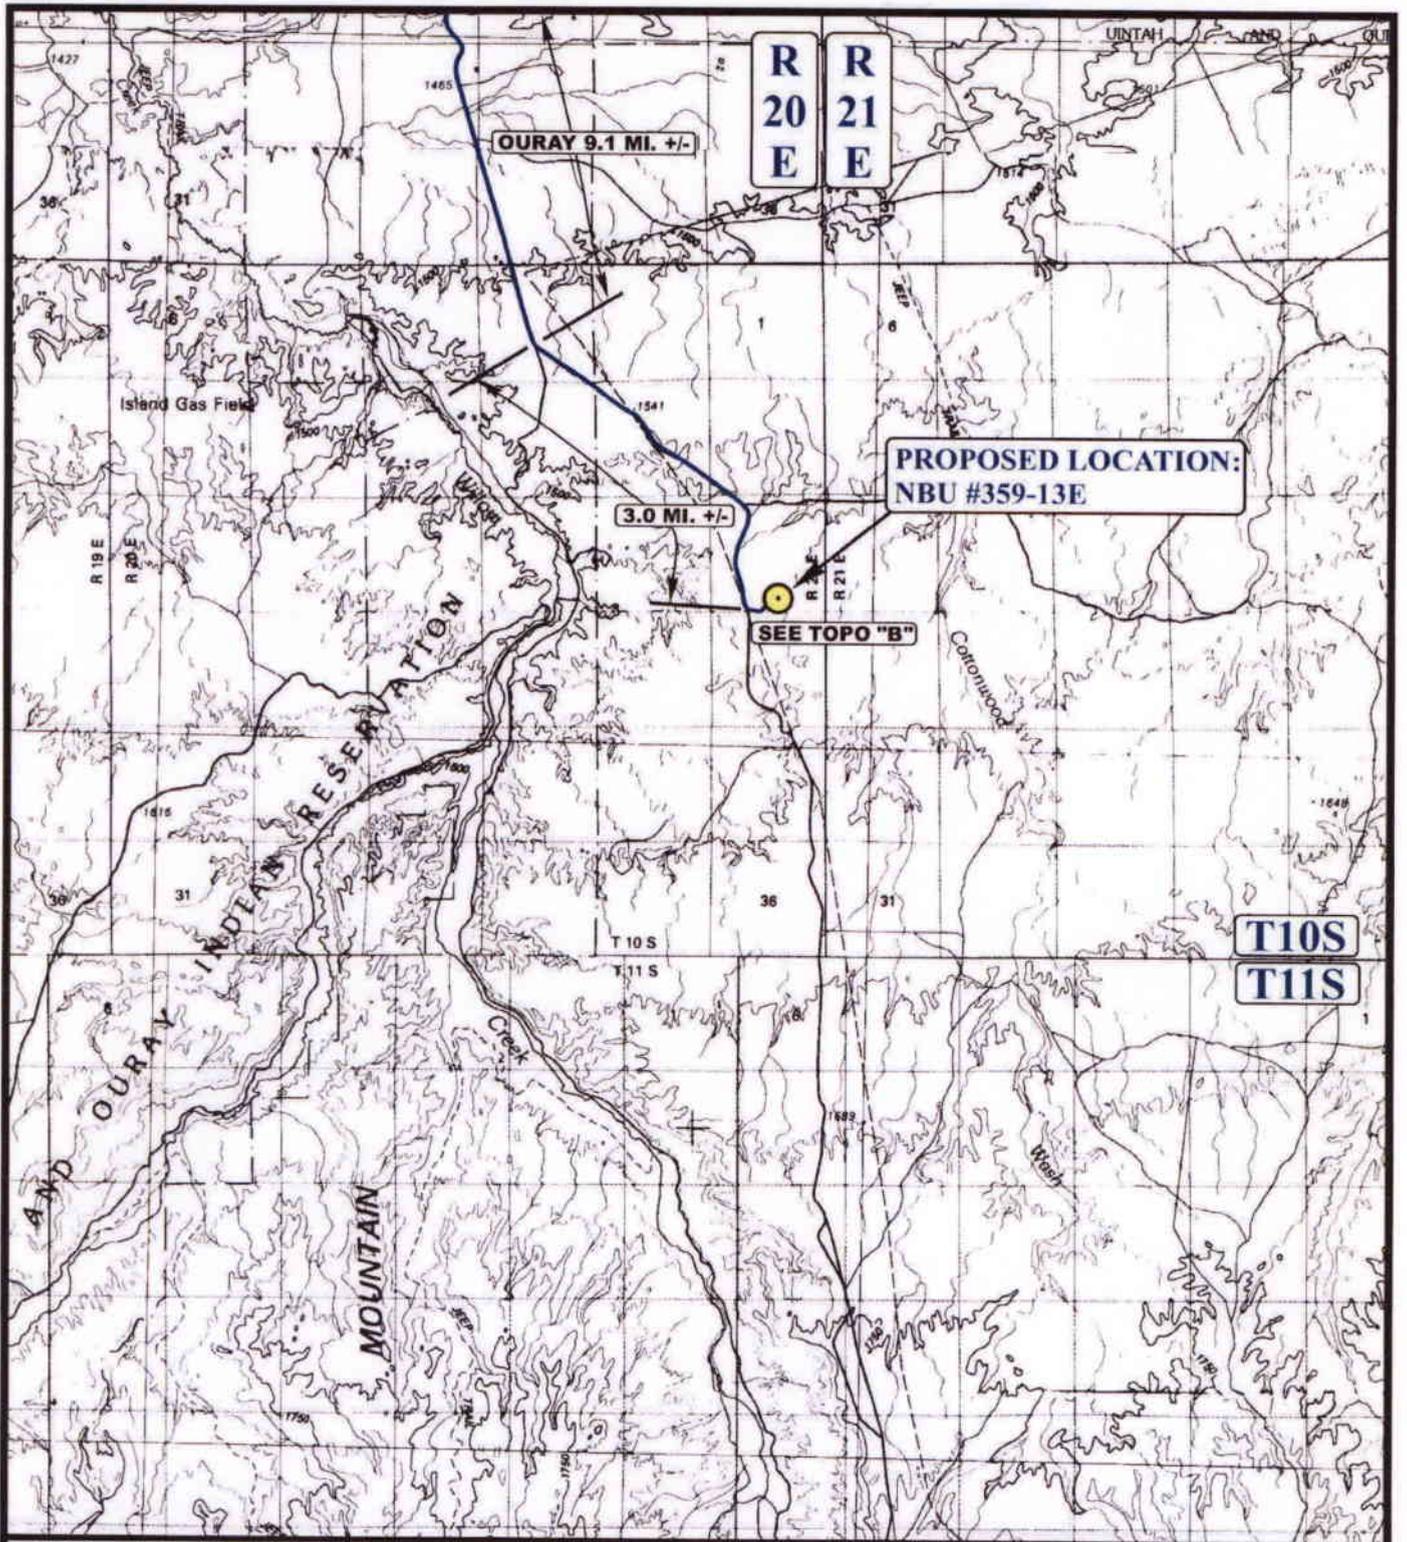

LEGEND:

 PROPOSED LOCATION



EOG RESOURCES, INC.


NBU #359-13E
 SECTION 13, T10S, R20E, S.L.B.&M.
 661' FSL 2149' FEL



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 1 28 08
MAP MONTH DAY YEAR
 SCALE: 1:100,000 DRAWN BY: Z.L. REVISED: 00-00-00



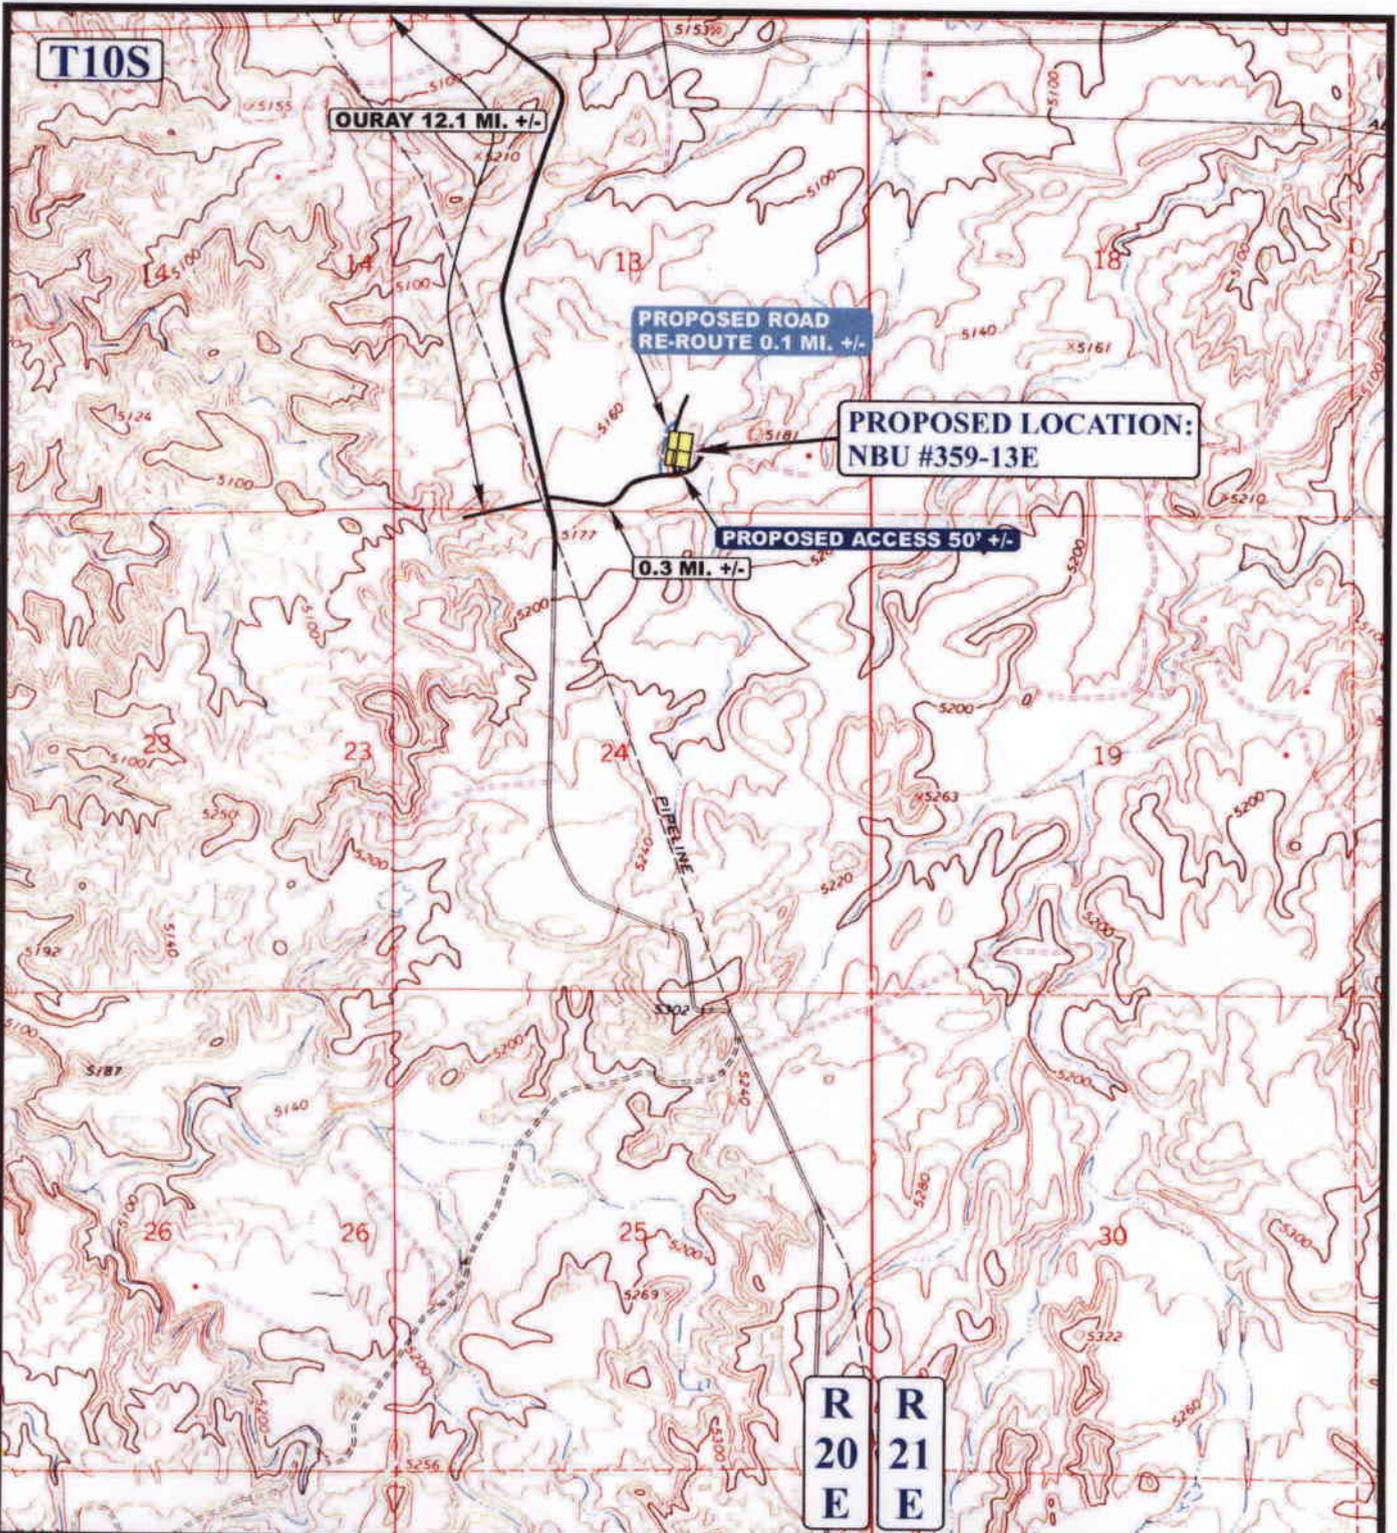

LEGEND:

- EXISTING ROAD
- - - PROPOSED ACCESS ROAD
- - - PROPOSED ROAD RE-ROUTE

EOG RESOURCES, INC.


NBU #359-13E
 SECTION 13, T10S, R20E, S.L.B.&M.
 661' FSL 2149' FEL

UEIS Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 1 28 08
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: Z.L. REVISED: 00-00-00

B
 TOPO

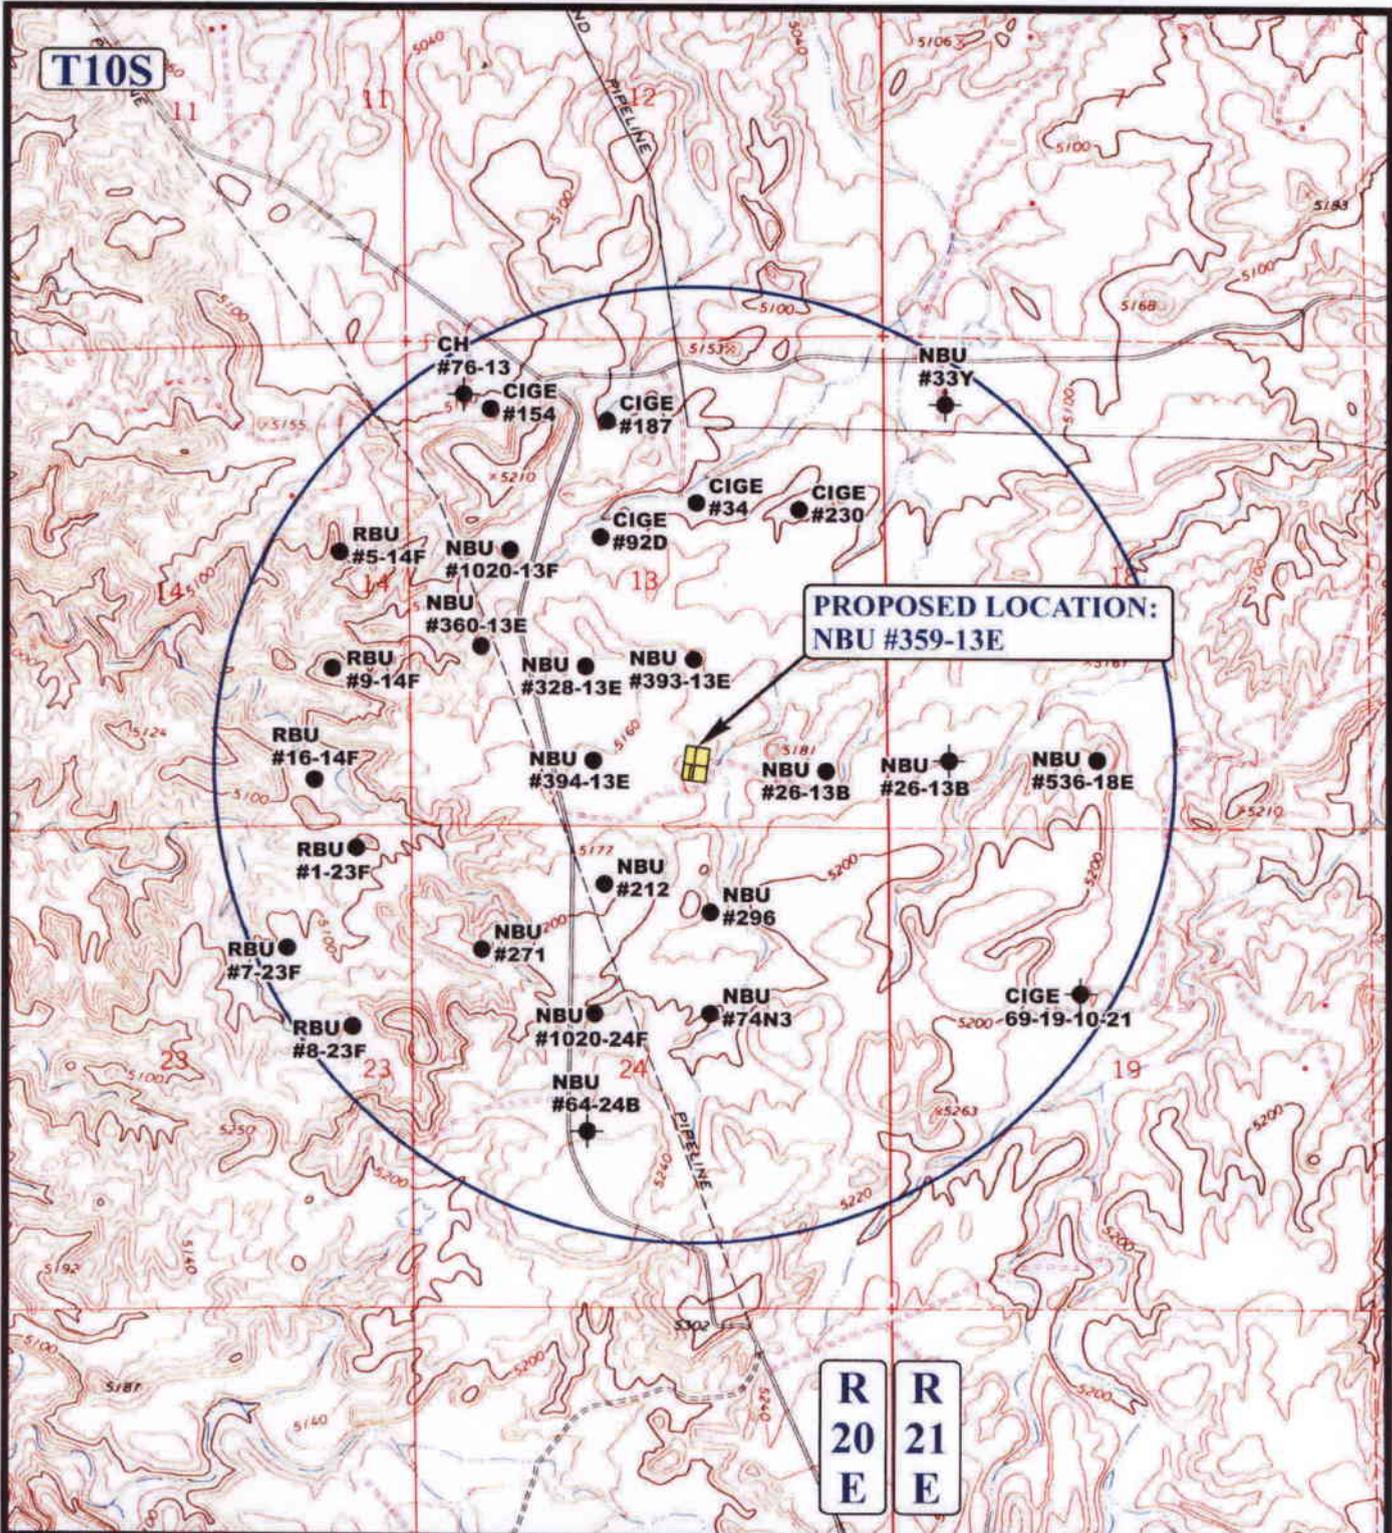

**PROPOSED LOCATION:
NBU #359-13E**

**R
20
E** **R
21
E**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



EOG RESOURCES, INC.


**NBU #359-13E
SECTION 13, T10S, R20E, S.L.B.&M.
661' FSL 2149' FEL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP** **1 28 08**
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: Z.L. REVISED: 00-00-00



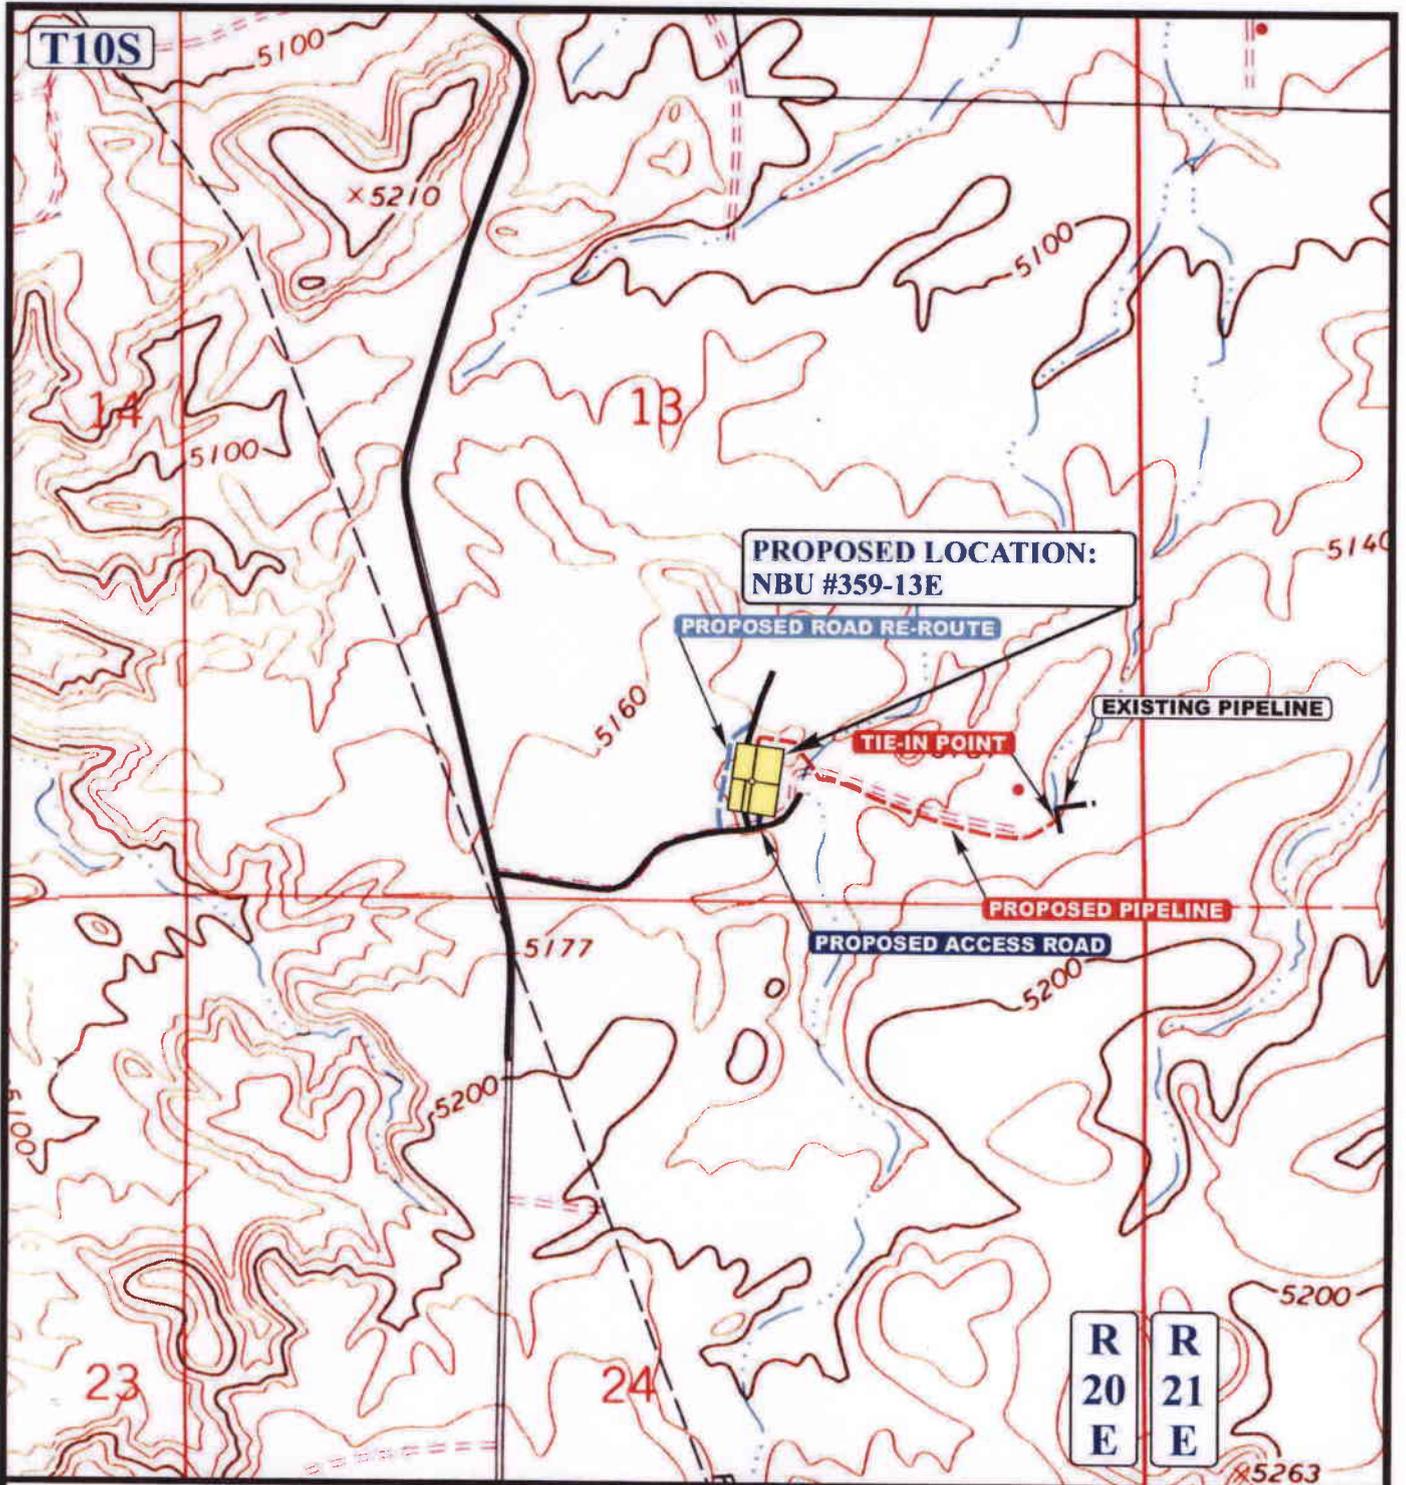

APPROXIMATE TOTAL PIPELINE DISTANCE = 1,895' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE

EOG RESOURCES, INC.

NBU #359-13E
SECTION 13, T10S, R20E, S.L.B.&M.
661' FSL 2149' FEL




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC MAP 1 28 08
MONTH DAY YEAR
SCALE: 1" = 1000' DRAWN BY: Z.L. REVISED: 00-00-00



EOG RESOURCES, INC.
TYPICAL CROSS SECTIONS FOR
NBU #359-13E
SECTION 13, T10S, R20E, S.L.B.&M.
661' FSL 2149' FEL

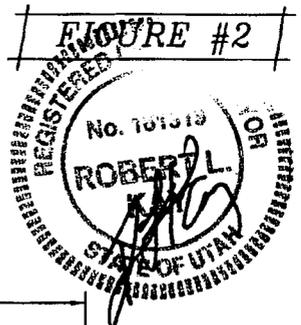

1" = 20'
 X-Section Scale
 1" = 50'
 DATE: 1-16-08
 Drawn By: C.P.

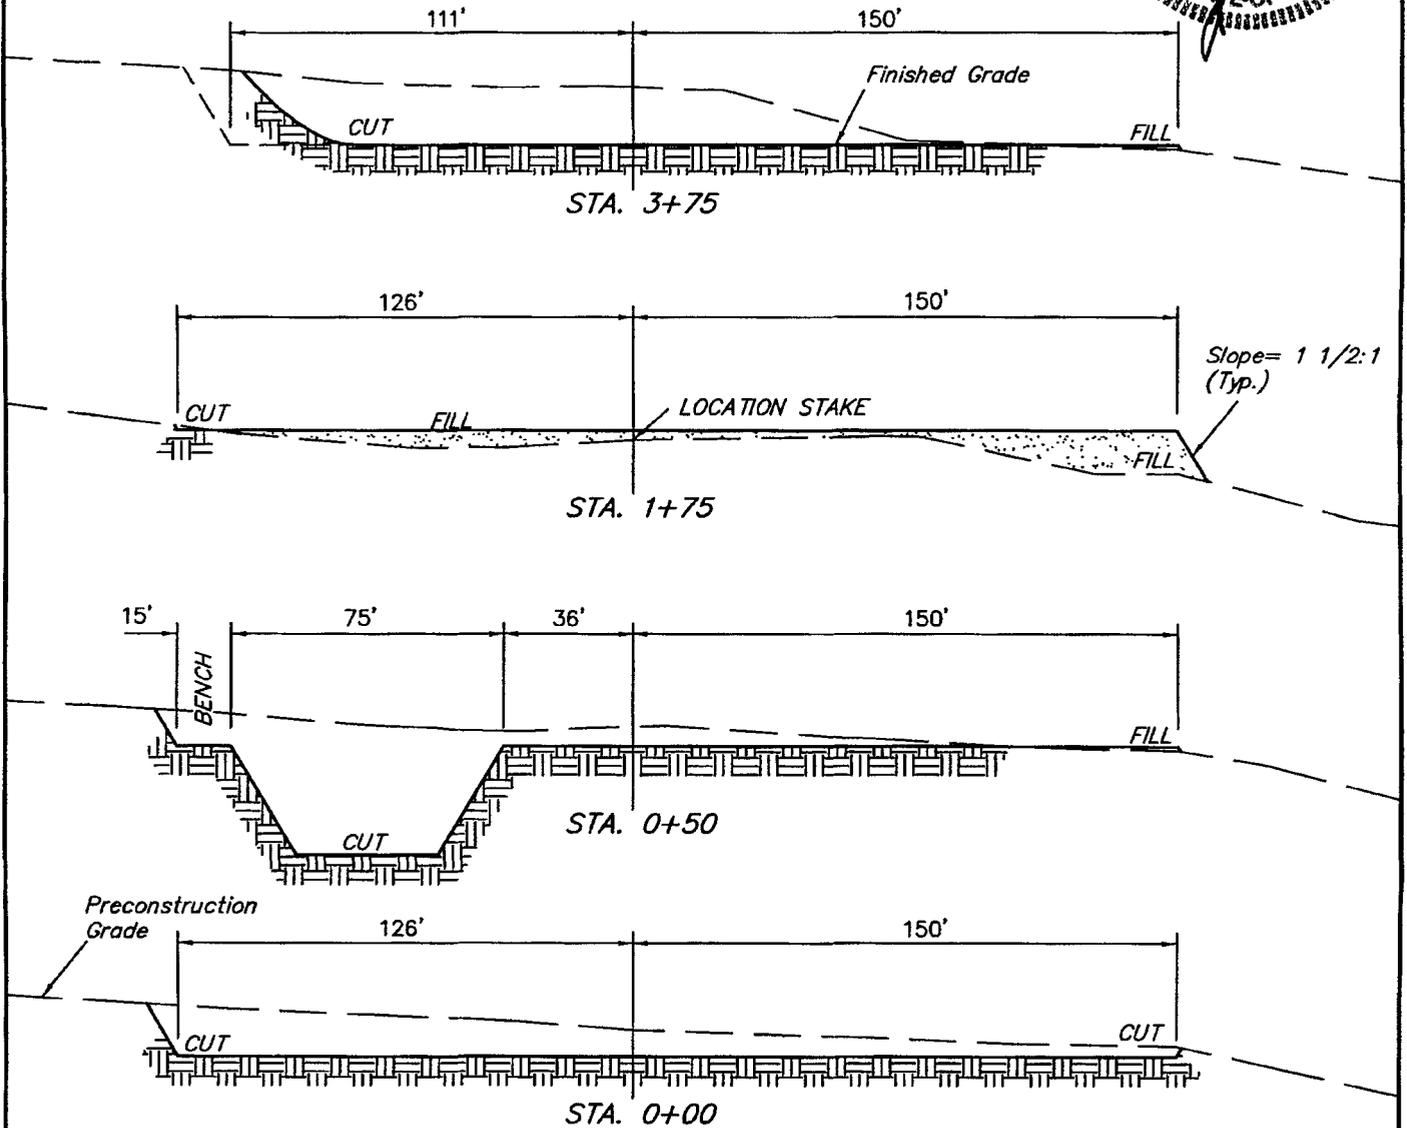

*** NOTE:**
 FILL QUANTITY INCLUDES
 5% FOR COMPACTION

APPROXIMATE YARDAGES

(6") Topsoil Stripping	=	2,060 Cu. Yds.
Remaining Location	=	7,420 Cu. Yds.
TOTAL CUT	=	9,480 CU. YDS.
FILL	=	5,400 CU. YDS.



EXCESS MATERIAL	=	4,080 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	4,080 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	=	0 Cu. Yds.

EOG RESOURCES, INC.
PRODUCTION FACILITY LAYOUT FOR
NBU #359-13E
SECTION 13, T10S, R20E, S.L.B.&M.
661' FSL 2149' FEL

FIGURE #3



SCALE: 1" = 50'
DATE: 1-16-08
Drawn By: C.P.

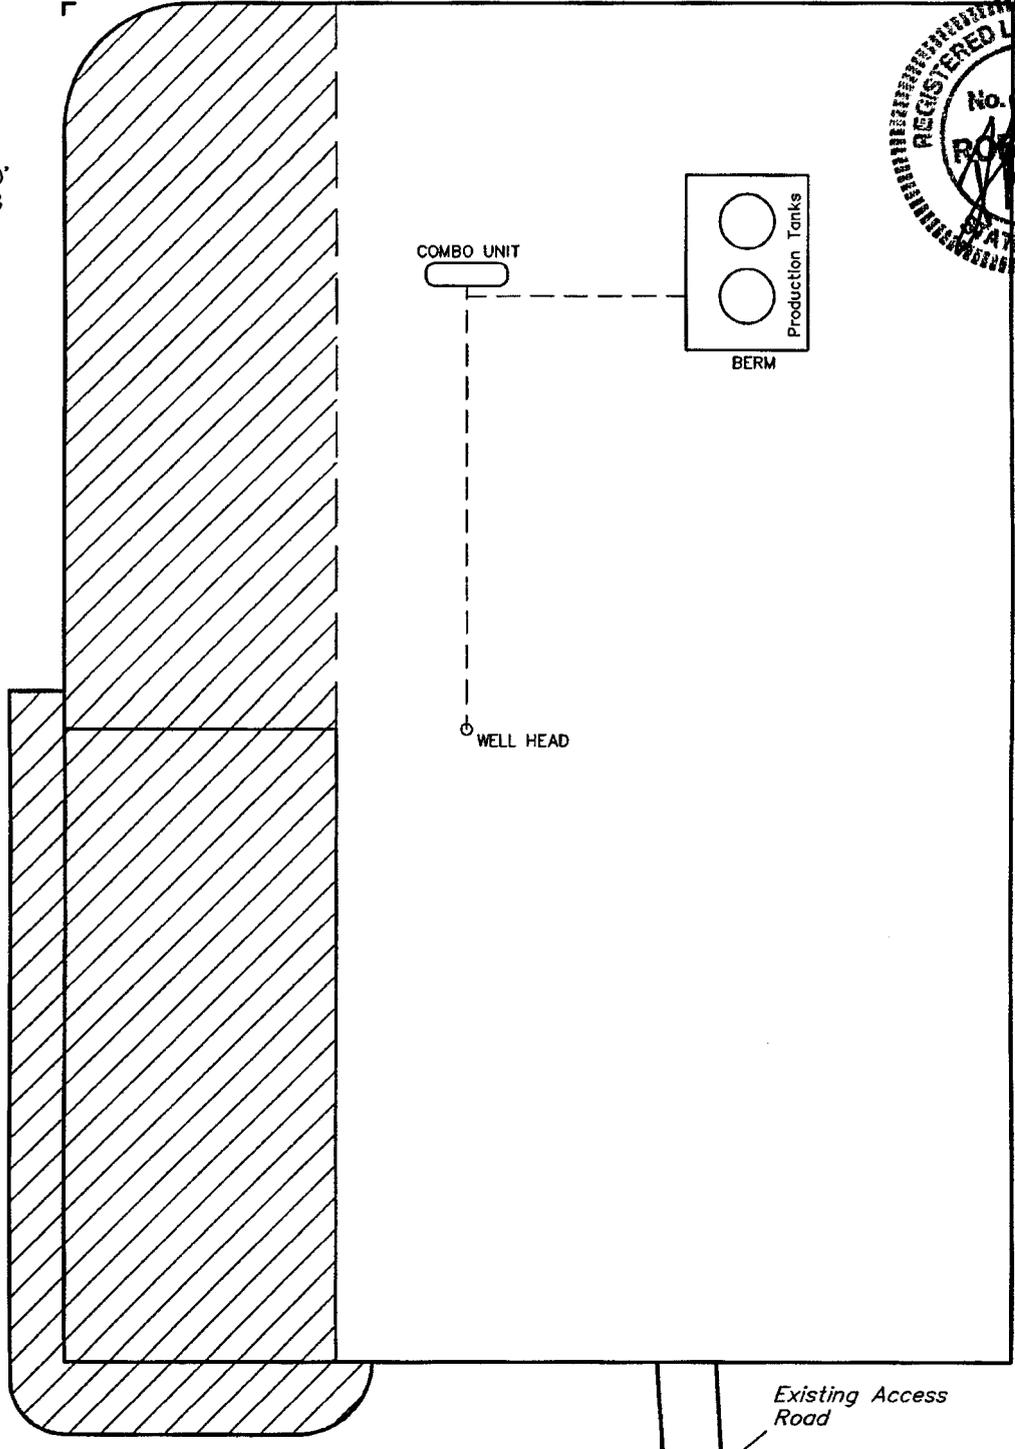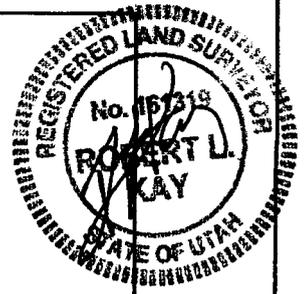

 RE-HABED AREA

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

EOG RESOURCES, INC.

NBU #359-13E

LOCATED IN UINTAH COUNTY, UTAH
SECTION 13, T10S, R20E, S.L.B.&M.

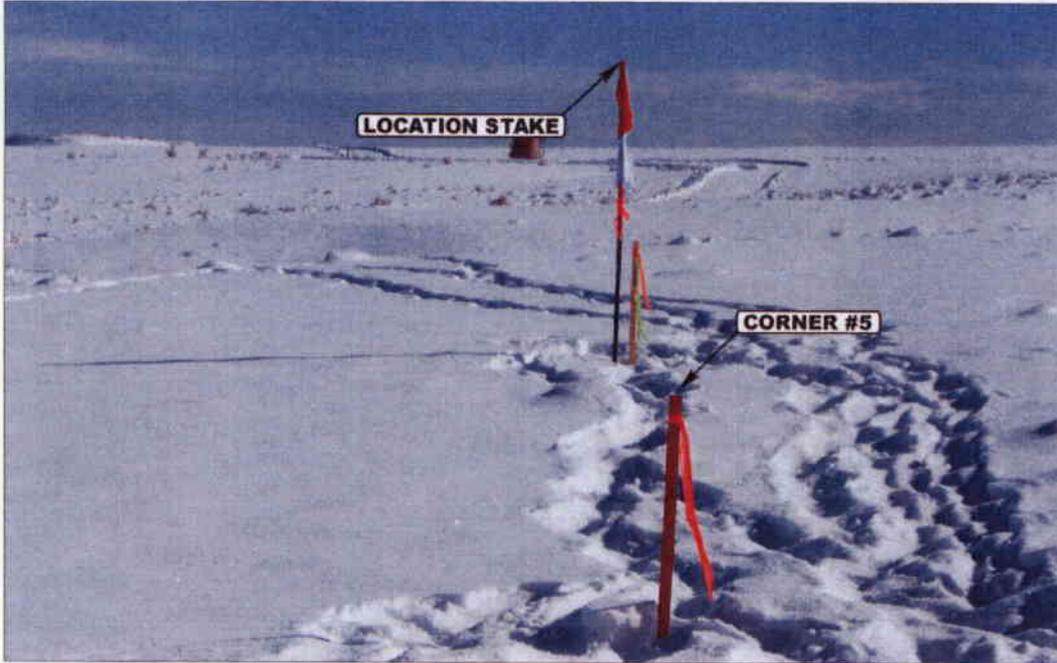


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: EASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

1 28 08
MONTH DAY YEAR

PHOTO

TAKEN BY: D.S.

DRAWN BY: Z.L.

REVISED: 00-00-00

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 02/29/2008

API NO. ASSIGNED: 43-047-50032

WELL NAME: NBU 359-13E
 OPERATOR: EOG RESOURCES, INC. (N9550)
 CONTACT: Kaylene Gardner

PHONE NUMBER: 435 781-9111

PROPOSED LOCATION:

SWSE 13 100S 200E
 SURFACE: 0661 FSL 2149 FEL
 BOTTOM: 0661 FSL 2149 FEL
 COUNTY: UINTAH
 LATITUDE: 39.94237 LONGITUDE: -109.6113
 UTM SURF EASTINGS: 618647 NORTHINGS: 4422074
 FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU4485
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: BUCN
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. 6196017)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-225)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)


LOCATION AND SITING:

- R649-2-3.
- Unit: NATURAL BUTTES *OK*
- R649-3-2. General
- Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: 17314
- Eff Date: 12-2-1999
- Siting: 460' W ubar of Eucummin. Traces
- R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____

1- Pending Approval
2-OIL SHALE

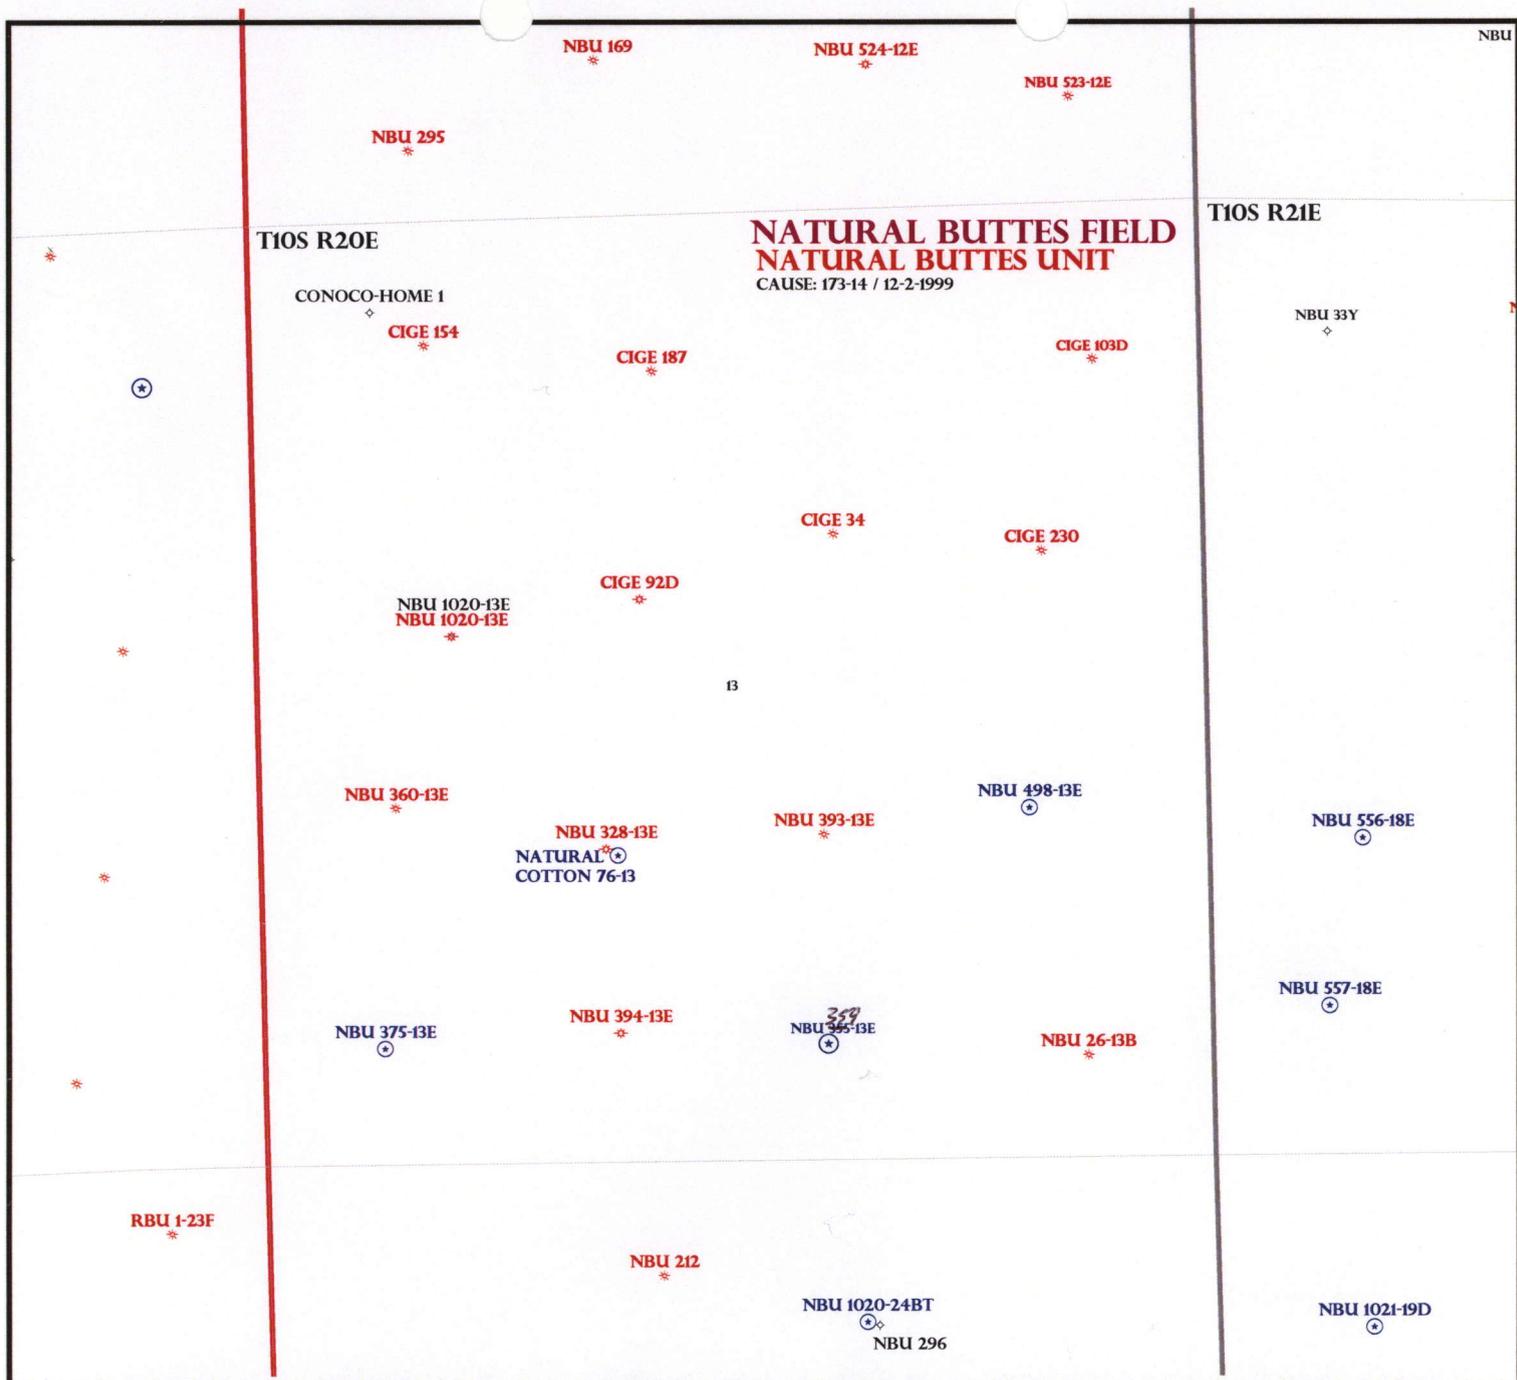

OPERATOR: EOG RESOURCES INC (N9550)

SEC: 13 T.10S R. 22E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 173-14 / 12-2-1999

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- GAS INJECTION
 - GAS STORAGE
 - LOCATION ABANDONED
 - NEW LOCATION
 - PLUGGED & ABANDONED
 - PRODUCING GAS
 - PRODUCING OIL
 - SHUT-IN GAS
 - SHUT-IN OIL
 - TEMP. ABANDONED
 - TEST WELL
 - WATER INJECTION
 - WATER SUPPLY
 - WATER DISPOSAL
 - DRILLING



OIL, GAS & MINING



PREPARED BY: DIANA MASON
DATE: 03-MARCH-2008



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

March 5, 2008

EOG Resources, Inc.
1060 East Highway 40
Vernal, UT 84078

Re: Natural Buttes Unit 359-13E Well, 661' FSL, 2149' FEL, SW SE, Sec. 13, T. 10 South, R. 20 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-50032.

Sincerely,

for Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal Office

Operator: EOG Resources, Inc.
Well Name & Number Natural Buttes Unit 359-13E
API Number: 43-047-50032
Lease: UTU4485

Location: SW SE **Sec.** 13 **T.** 10 South **R.** 20 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010

FEB 29 2008

APPLICATION FOR PERMIT TO DRILL OR REENTER **BLM**

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU4485
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES INC Contact: KAYLENE R GARDNER E-Mail: kaylene_gardner@eogresources.com		7. If Unit or CA Agreement, Name and No. UTU63047A
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078		8. Lease Name and Well No. NBU 359-13E
3b. Phone No. (include area code) Ph: 435-781-9111		9. API Well No. 43-047-50032
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWSE 661FSL 2149FEL 39.94232 N Lat, 109.61195 W Lon At proposed prod. zone SWSE 661FSL 2149FEL 39.94232 N Lat, 109.61195 W Lon		10. Field and Pool, or Exploratory NATURAL BUTTES
14. Distance in miles and direction from nearest town or post office* 43.4 MILES SOUTH OF VERNAL, UT		11. Sec., T., R., M., or Bk. and Survey or Area Sec 13 T10S R20E Mer SLB SME: BLM
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 661	16. No. of Acres in Lease 680.00	12. County or Parish UINTAH
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1100	19. Proposed Depth 6357 MD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5160 GL	22. Approximate date work will start	17. Spacing Unit dedicated to this well
23. Estimated duration 45 DAYS		20. BLM/BIA Bond No. on file NM2308

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature (Electronic Submission)	Name (Printed/Typed) KAYLENE R GARDNER Ph: 435-781-9111	Date 02/29/2008
--	--	--------------------

Title
LEAD REGULATORY ASSISTANT

Approved by (Signature)	Name (Printed/Typed) Jenny Lewellen	Date OCT 16 2008
-------------------------	--	---------------------

Title Lands & Mineral Resources	Office VERNAL FIELD OFFICE
------------------------------------	-------------------------------

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #58868 verified by the BLM Well Information System
For EOG RESOURCES INC, sent to the Vernal
Committed to AFMSS for processing by GAIL JENKINS on 03/03/2008 (08GXJ2510AE)

UDDG/M
NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

** BLM REVISED OCT 29 2008

08 GXJ2510 AE

NO NOS

APD.
POSTED: 3-3-2008

DIV. OF OIL, GAS & MINING



**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE**

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: EOG Resources INC
Well No: NBU 359-13E
API No: 43-047-50032

Location: SWSE, Sec. 13, T10S, R20E
Lease No: UTU-4485
Agreement: Natural Buttes Unit

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	James Ashley	(435) 781-4470	(435) 828-7874
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
Supervisory NRS:	Karl Wright	(435) 781-4484	
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544
NRS/Enviro Scientist:	James Hereford	(435) 781-3412	(435) 828-3546
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Dan Emmett	(435) 781-3414	(435) 828-4029
NRS/Enviro Scientist:	Paul Percival	(435) 781-4493	(435) 828-7381
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545

Fax: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	- Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Production casing cement shall be brought up and into the surface casing. The minimum cement top is 200 ft above the surface casing shoe.
COA specification is consistent with operators performance standard stated in APD.
- A variance is granted for Onshore Order #2 Drilling Operations III. E. "Blooie line discharge 100 feet from well bore and securely anchored" Blooie line can be 75 feet.
All requirements will be adhered to covering air/gas drilling operations as described in Onshore Order #2 III. E. 1. Drilling Operations, Special Drilling Operations, air/gas drilling.
- A Gamma Ray well Log shall be run from the well Total Depth to the surface.
A copy of the Gamma Ray well Log shall be submitted to the BLM Vernal Field Office.

Onshore Order no. #2 Drilling Operations III. E. 1.

- All requirements will be adhered to covering air/gas drilling operations as described in Onshore Order #2 III. E. 1. Drilling Operations, Special Drilling Operations, air/gas drilling.
variance(s) to Onshore Order #2 Drilling Operations III. E.
 - requirement for deduster equipment
 - requirement waived for deduster equipmentDeduster equipment capabilities described by operator as function performed by continuous sprayer water mist
 - automatic igniter or continuous pilot light on the blooie line
 - requirement waived for igniter and pilot light operators blooie line output fluid stream is an incombustible aerated water system blooie line fire prevention and suppression function operation achieved thru continuous aerated water fluid stream flow
 - compressors located in opposite direction from the blooie line a minimum of 100 feet
 - Compressors are truck mounted. Operators standard practice is to rig up with truck mounted compressors oriented ninety degrees to blooie line. Compressors are truck mounted with spark arresters.
- Conductor casing shall be set into competent formation at a depth of 60 ft, plus or minus 10 ft.
COA specification is consistent with operators performance standard (operators shallow surface operations covered in part 13 Air Drilling Operations) stated in APD.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in

advance of casing cementing operations and BOPE & casing pressure tests.

- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**

- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:
UTU-4485

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:
Natural Buttes Unit

1. TYPE OF WELL
OIL WELL GAS WELL OTHER _____

8. WELL NAME and NUMBER:
Natural Buttes Unit 359-13E

2. NAME OF OPERATOR:
EOG Resources, Inc.

9. API NUMBER:
43-047-50032

3. ADDRESS OF OPERATOR:
1060 East Highway 40 Vernal UT 84078

PHONE NUMBER:
(435) 781-9145

10. FIELD AND POOL, OR WILDCAT:
Natural Buttes

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 661' FSL & 2149' FEL 39.942325 LAT 109.611947 LON

COUNTY: Uintah

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWSE 13 10S 20E S.L.B. & M.

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<u>REQUEST</u>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 03-11-09
By: [Signature]

COPY SENT TO OPERATOR

Date: 3-12-2009

Initials: KS

NAME (PLEASE PRINT) Mickenzie Thacker

TITLE Operations Clerk

SIGNATURE [Signature]

DATE 2/23/2009

(This space for State use only)

RECEIVED

MAR 02 2009

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-50032
Well Name: Natural Buttes Unit 359-13E
Location: 661 FSL & 2149 FEL (SWSE), SECTION 13, T10S, R20E S.L.B.&M
Company Permit Issued to: EOG Resources, Inc.
Date Original Permit Issued: 3/5/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Michelle Thacker
Signature

2/23/2009

Date

Title: Operations Clerk

Representing: EOG Resources, Inc.

RECEIVED

MAR 02 2009

DIV. OF OIL, GAS & MINING

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: EOG Resources, Inc.

Well Name: NBU 359-13E

API No: 43-047-50032 Lease Type: Federal

Section 13 Township 10S Range 20E County Uintah

Drilling Contractor Craig's Roustabout Services Rig # Bucket

SPUDDED:

Date 05/02/09

Time 09:00 AM

How Dry

Drilling will Commence: _____

Reported by Kent

Telephone # 435-828-8200

Date 05/05/2009 Signed RM

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU4485

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
NATURAL BUTTES

8. Well Name and No.
NATURAL BUTTES UNIT 359-13E

9. API Well No.
43-047-50032

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. County or Parish, and State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EOG RESOURCES, INC. Contact: MICKENZIE THACKER
E-Mail: MICKENZIE_THACKER@EOGRESOURCES.COM

3a. Address
1060 EAST HIGHWAY 40
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 453-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 13 T10S R20E SWSE 661FSL 2149FEL
39.94232 N Lat, 109.61195 W Lon

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Well Spud
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomple in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

The referenced well was spud on 5/2/2009.

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #69772 verified by the BLM Well Information System
For EOG RESOURCES, INC., sent to the Vernal**

Name (Printed/Typed) MICKENZIE THACKER Title OPERATIONS CLERK

Signature *Mickenzie Thacker* Date 05/06/2009

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED**

**RECEIVED
MAY 11 2009**

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.		5. Lease Serial No. UTU4485
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES, INC.		7. If Unit or CA/Agreement, Name and/or No. NATURAL BUTTES
Contact: MICKENZIE THACKER E-Mail: MICKENZIE_THACKER@EOGRESOURCES.COM		8. Well Name and No. NATURAL BUTTES UNIT 359-13E
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078	3b. Phone No. (include area code) Ph: 453-781-9145	9. API Well No. 43-047-50032
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 13 T10S R20E SWSE 661FSL 2149FEL 39.94232 N Lat, 109.61195 W Lon		10. Field and Pool, or Exploratory NATURAL BUTTES
		11. County or Parish, and State UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Change to Original APD
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. respectfully requests authorization to change the conductor size as follows:

14" Conductor

Casing: Conductor
Hole Size: 20"
Length: 40-60'
Size: 14"
Weight: 32.5#
Grade: A252
Factor Burst: 1880 PSI
Tensile: 10,000#

COPY SENT TO OPERATOR

Date: 5.19.2009
Initials: KS

14. I hereby certify that the foregoing is true and correct. Electronic Submission #69485 verified by the BLM Well Information System For EOG RESOURCES, INC., sent to the Vernal	
Name (Printed/Typed) MICKENZIE THACKER	Title OPERATIONS CLERK
Signature <i>Mickenzie Thacker</i>	Date 04/27/2009

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <i>Debbie</i>	Title <i>Pet-Eng</i>	Date <i>5/18/09</i>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office <i>DOG m</i>
		Federal Approval Of This Action Is Necessary

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

RECEIVED
APR 29 2009

DIV. OF OIL, GAS & MINING

ENTITY ACTION FORM

Operator: EOG Resources, Inc. Operator Account Number: N 9550
 Address: 1060 East Highway 40
city Vernal
state UT zip 84078 Phone Number: (435) 781-9145

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-50032	NATURAL BUTTES UNIT 359-13E		SWSE	13	10S	20E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
<i>AB</i>	99999	<i>2900</i>	5/2/2009		<i>5/19/09</i>		
Comments: <u>WASATCH</u> <u>BUKEN = WSTC = WSMVD</u>							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-40044	CHAPITA WELLS UNIT 1384-34		SWSE	34	9S	23E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
<i>AB</i>	99999	<i>13650</i>	5/5/2009		<i>5/19/09</i>		
Comments: <u>MESAVERDE</u>							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-39897	NATURAL BUTTES UNIT 486-07E		NESW	7	10S	21E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
<i>AB</i>	99999	<i>2900</i>	5/6/2009		<i>5/19/09</i>		
Comments: <u>WASATCH = WSMVD</u>							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Mickenzie Thacker

Name (Please Print)

Mickenzie Thacker

Signature

Operations Clerk

5/6/2009

Title

Date

RECEIVED

MAY 07 2009

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU4485
	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: _____
	7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: NBU 359-13E
2. NAME OF OPERATOR: EOG Resources, Inc.	9. API NUMBER: 43047500320000
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Vernal, UT, 84078	PHONE NUMBER: 435 781-9111 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0661 FSL 2149 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 13 Township: 10.0S Range: 20.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
	COUNTY: UINTAH
	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 7/16/2009	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The referenced well was turned to sales on 7/16/2009. Please see the attached operations summary report for drilling and completion operations performed on the subject well.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
 July 22, 2009

NAME (PLEASE PRINT) Mickenzie Thacker	PHONE NUMBER 435 781-9145	TITLE Operations Clerk
SIGNATURE N/A	DATE 7/22/2009	

WELL CHRONOLOGY REPORT

Report Generated On: 07-22-2009

Well Name	NBU 359-13E	Well Type	DEVG	Division	DENVER
Field	NATURAL BUTTES UNIT	API #	43-047-50032	Well Class	1SA
County, State	UINTAH, UT	Spud Date	06-15-2009	Class Date	07-16-2009
Tax Credit	N	TVD / MD	6,357/ 6,357	Property #	062912
Water Depth	0	Last CSG	2.375	Shoe TVD / MD	5,408/ 5,408
KB / GL Elev	5,174/ 5,161				
Location	Section 13, T10S, R20E, SWSE, 661 FSL & 2149 FEL				

Event No	1.0	Description	DRILL & COMPLETE		
Operator	EOG RESOURCES, INC	WI %	100.0	NRI %	73.947

AFE No	306177	AFE Total	1,146,200	DHC / CWC	523,100/ 623,100
Rig Contr	ELENBURG	Rig Name	ELENBURG #28	Start Date	03-17-2008
03-17-2008	Reported By	CYNTHIA HANSELMAN			
Daily Costs: Drilling	\$0	Completion	\$0	Daily Total	\$0
Cum Costs: Drilling	\$0	Completion	\$0	Well Total	\$0
MD	0	TVD	0	Progress	0
Days	0	MW	0.0	Visc	0.0
Formation :	PBTD : 0.0		Perf :	PKR Depth : 0.0	

Activity at Report Time: LOCATION DATA

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION DATA
			661' FSL & 2149' FEL (SW/SE)
			SECTION 13, T10S, R20E
			UINTAH COUNTY, UTAH
			 LAT 39.942325, LONG 109.611947 (NAD 83)
			LAT 39.942361, LONG 109.611258 (NAD 27)
			 OBJECTIVE: 6357' TD, WASATCH
			DW/GAS
			NATURAL BUTTES PROSPECT
			DD&A: NATURAL BUTTES
			NATURAL BUTTES FIELD
			 LEASE: UTU-4485
			ELEVATION: 5160.0' NAT GL, 5161.1' PREP GL (DUE TO ROUNDING THE PREP GL WILL BE 5161'), 5174' KB (13')
			 EOG BPO WI 100%, NRI 73.946716%
			EOG APO WI 66.67%, NRI 49.394976%

04-23-2009 **Reported By** TERRY CSERE

DailyCosts: Drilling \$80,000 **Completion** \$0 **Daily Total** \$80,000

Cum Costs: Drilling \$80,000 **Completion** \$0 **Well Total** \$80,000

MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: BUILD LOCATION

Start	End	Hrs	Activity Description
06:00	06:00	24.0	START LOCATION TODAY 4/23/09.

04-24-2009 **Reported By** TERRY CSERE

DailyCosts: Drilling \$0 **Completion** \$0 **Daily Total** \$0

Cum Costs: Drilling \$80,000 **Completion** \$0 **Well Total** \$80,000

MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: LOCATION BUILD

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION 20% COMPLETE.

04-27-2009 **Reported By** TERRY CSERE

DailyCosts: Drilling \$0 **Completion** \$0 **Daily Total** \$0

Cum Costs: Drilling \$80,000 **Completion** \$0 **Well Total** \$80,000

MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: LOCATION BUILD

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION 35% COMPLETE.

04-28-2009 **Reported By** TERRY CSERE

DailyCosts: Drilling \$0 **Completion** \$0 **Daily Total** \$0

Cum Costs: Drilling \$80,000 **Completion** \$0 **Well Total** \$80,000

MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: BUILD LOCATION

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION 45% COMPLETE.

04-29-2009 **Reported By** TERRY CSERE

DailyCosts: Drilling \$0 **Completion** \$0 **Daily Total** \$0

Cum Costs: Drilling \$80,000 **Completion** \$0 **Well Total** \$80,000

MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: LOCATION BUILD

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION 75% COMPLETE.

04-30-2009 **Reported By** TERRY CSERE

Daily Costs: Drilling \$0 **Completion** \$0 **Daily Total** \$0
Cum Costs: Drilling \$80,000 **Completion** \$0 **Well Total** \$80,000

MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: LOCATION BUILD

Start	End	Hrs	Activity Description
06:00	06:00	24.0	STARTING CLOSED LOOP SYSTEM. LOCATION COMPLETE.

05-01-2009 **Reported By** TERRY CSERE/KEVEN DEVENPORT

Daily Costs: Drilling \$0 **Completion** \$0 **Daily Total** \$0
Cum Costs: Drilling \$80,000 **Completion** \$0 **Well Total** \$80,000

MD 60 **TVD** 60 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: SPUD NOTIFICATION/LOCATION BUILD

Start	End	Hrs	Activity Description
06:00	06:00	24.0	CRAIGS ROUSTABOUT SERVICE TO SPUD A 20" HOLE ON 5/2/09 @ 9:00 AM. SET ±60' OF 14" CONDUCTOR. CEMENT TO SURFACE WITH READY MIX. CAROL DANIELS W/UDOGM WAS NOTIFIED BY PHONE MESSAGE AND BLM WAS NOTIFIED BY EMAIL OF SPUD ON 05/01/09 @ 6:11 AM. CLOSED LOOP SYSTEM 80% COMPLETE.

05-04-2009 **Reported By** TERRY CSERE/KEVEN DEVENPORT

Daily Costs: Drilling \$0 **Completion** \$0 **Daily Total** \$0
Cum Costs: Drilling \$80,000 **Completion** \$0 **Well Total** \$80,000

MD 60 **TVD** 60 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: WO/AIR RIG

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION COMPLETE.

06-10-2009 **Reported By** JESSE TATMAN / DAVID FOREMAN

Daily Costs: Drilling \$202,402 **Completion** \$0 **Daily Total** \$202,402
Cum Costs: Drilling \$282,402 **Completion** \$0 **Well Total** \$282,402

MD 2,398 **TVD** 2,398 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: WORT

Start	End	Hrs	Activity Description
06:00	06:00	24.0	MIRU CRAIG'S AIR RIG #3 ON 6/1/2009. DRILLED 12-1/4" HOLE 2385' GL (2398 KB). ENCOUNTERED WATER @ 1600. FLUID DRILLED FROM 1620 TO TD WITH PARTIAL LOSSES. SPOTTED DRILLING MUD ON BOTTOM. RAN 55 JTS (2370.52') OF 9-5/8", 36.0#, J-55, ST&C CASING WITH HALLIBURTON GUIDE SHOE AND FLOAT COLLAR. 8 CENTRALIZERS SPACED MIDDLE OF SHOE JOINT AND EVERY COLLAR TILL GONE. LANDED @ 2383.52' KB. RUN 200' OF 1" SCHEDULE 40 PIPE. RDMO CRAIGS RIG #3.

MIRU HALLIBURTON CEMENTERS. HELD SAFETY MEETING. PRESSURE TESTED LINES AND CEMENT VALVE TO 2000 PSIG. PUMPED 25 BBLs FRESH WATER & 20 BBLs GELLED WATER FLUSH AHEAD OF CEMENT. LEAD: MIXED & PUMPED 250SX (183 BBLs) OF PREMIUM CEMENT W 0.2% VARSET & 2% CALSEAL & 2% EX-1. MIXED CEMENT @ 10.5 PPG W/YIELD OF 4.1 CF/SX. TAIL: MIXED AND PUMPED 300 SACKS (63 BBLs) OF PREMIUM CEMENT W/ 2% CACL MIXED CEMENT @ 15.6 PPG W/ YIELD OF 1.18 CF/SX. DISPLACED CEMENT W/179 BBLs FRESH WATER. BUMPED PLUG W/475 PSI @ 0:45, 6/4/2009 FLOATS HELD. RETURNED 7 BBL'S OF LEADCEMENT TO SURFACE. CEMENT FELL BACK AT COMPLETION OF PUMPING.

TOP JOB # 1: DOWN 200' OF 1' PIPE, MIXED & PUMPED 150SX (32 BBLs) OF PREMIUM CEMENT W/2% CACL2. MIXED CEMENT @ 15.8 PPG W/YIELD OF 1.15 CF/SX. CIRCULATED APPROXIMATELY 20 BBL'S CEMENT TO SURFACE. CEMENT FELL BACK UPON COMPLETION OF PUMPING

TOP JOB # 2: MIXED & PUMPED 90 SX (18 BBLs) OF PREMIUM CEMENT W/2% CACL2. MIXED CEMENT @ 15.8 PPG W/YIELD OF 1.15 CF/SX. GOOD RETURNS, CEMENT STOOD AT SURFACE. RELEASE HALLIBURTON.

PREPARED LOCATION FOR ROTARY RIG. WORT. WILL DROP FROM REPORT UNTIL FURTHER ACTIVITY.

CRAIGS RIG 3 TOOK 2 EACH SURVEYS WHILE DRILLING HOLE @ 1420' =0.25 DEGREE & 2385' = 2.00 DEGREE.

KENT DEVENPORT NOTIFIED BLM VIA ELECTRONIC FORM OF THE SURFACE CASING & CEMENT JOB ON 6/4/2009 @ 08:00:00 AM.

JESSE TATMAN NOTIFIED CAROL DANIELS WITH UDOGM OF THE SURFACE CASING & CEMENT JOB ON 6/4/2009 @ 12:00 NOON PM.

06-16-2009		Reported By	BRIAN DUTTON								
DailyCosts: Drilling	\$73,456	Completion	\$0	Daily Total	\$73,456						
Cum Costs: Drilling	\$355,858	Completion	\$0	Well Total	\$355,858						
MD	4,119	TVD	4,119	Progress	1,711	Days	1	MW	0.0	Visc	0.0
Formation :	PBTD : 0.0			Perf :	PKR Depth : 0.0						

Activity at Report Time: DRILLING @ 4,119'

Start	End	Hrs	Activity Description
06:00	10:30	4.5	HELD SAFETY MEETING W/RIG CREW & RIG MOVERS. MOVED RIG FROM NBU 655-7E, MOVE WAS 2.5 MILES. RURT RAISED DERRICK @ 0900 HRS 6/15/09. RELEASED TRUCKS @ 1000 HRS. NO ACCIDENTS. 5 MEN 20.0 MAN -HOURS. OLD LOCATION NBU 655-7E CLEAN & CLEARED OFF.
10:30	13:00	2.5	RIG ACCEPTED FOR DAYWORK @ 10:30 HRS, 6/15/09. NU BOPE.
13:00	16:30	3.5	TESTED BOPE(PIPE RAMS, VALVES, MANIFOLD 250/5000 PSI, ANNULAR 250/2500 PSI TEN MINS) TEST CASING 1500 PSI FOR 30 MIN. NOTIFIED BLM VIA EMAIL @ 1030 6/14/09 OF BOP TEST TO BE PERFORMED 1400 HRS 6/15/09. NO BLM WITNESS.
16:30	17:00	0.5	INSTALL WEAR BUSHING.
17:00	18:30	1.5	PU BHA, TRIP IN HOLE WITH BIT #1, TAGGED @ 2,258'.
18:30	20:00	1.5	DRILL CEMENT/FLOAT EQUIP. F/2,258' TO 2,398' AND DRILL 10' OF NEW HOLE TO 2,408'.
20:00	20:30	0.5	PERFORM FIT @ 2,408' TO 11.2 PPG EMW (220 PSI W/9.5PPG MUD).
20:30	06:00	9.5	DRILLED 2,408' TO 4,119' (1,711' @ 180.1 FPH), WOB 10-20K, GPM 419, RPM 40-70/MOTOR 138, SPP 2163, DIFF. PRESS. 550/650 PSI, MUD WT. 9.8, VIS 33.

DIESEL 2125 GALS (USED 1745 GALS).

NO ACCIDENTS. FULL CREWS. SAFETY MEETING TOPIC- PICKING UP BHA.

FUNCTION COM FIRST CONN ON TOUR, ALL CREWS.
 TRANSFERRED 6 JTS(256.59) 4.5" 11.6# HCP-110 LTC CASING FROM NBU 655-7E.
 TRANSFERRED 1 MARKER JT. (10.11') 4.5" 11.5# HCP-110 LTC FROM NBU 655-7E.
 TRANSFERRED 3870 GALS DIESEL FROM NBU 655-7E

06:00 SPUD 7 7/8" HOLE AT 20:30 HRS, 6/15/09.

06-17-2009	Reported By	BRIAN DUTTON									
DailyCosts: Drilling	\$35,985	Completion	\$1,155	Daily Total	\$37,140						
Cum Costs: Drilling	\$391,843	Completion	\$1,155	Well Total	\$392,998						
MD	5,478	TVD	5,478	Progress	1,359	Days	2	MW	0.0	Visc	32.0
Formation :	PBTD : 0.0		Perf :		PKR Depth : 0.0						
Activity at Report Time: DRILLING @ 5,478'											

Start	End	Hrs	Activity Description
06:00	07:30	1.5	DRILLED 4,119' TO 4,345' (226' @ 150.6 FPH), WOB 10-20K, GPM 419, RPM 40-70/MOTOR 138, SPP 2163, DIFF. PRESS. 580/650 PSI, MUD WT. 9.8, VIS 34.
07:30	08:00	0.5	SURVEY DEPTH @ 4,300' 2.5 DEGREES.
08:00	14:00	6.0	DRILLED 4,345' TO 4,644' (299' @ 49.8 FPH), WOB 10-20K, GPM 419, RPM 40-70/MOTOR 138, SPP 1850, DIFF. PRESS. 286/350 PSI, MUD WT. 9.8, VIS 34.
14:00	14:30	0.5	SERVICE RIG.
14:30	06:00	15.5	DRILLED 4,644' TO 5,478' (834' @ 53.8 FPH), WOB 10-20K, GPM 419, RPM 40-70/MOTOR 138, SPP 1930, DIFF. PRESS. 350/420 PSI, MUD WT. 9.8, VIS 36. DIESEL 2390 GALS (USED 265 GALS).
NO ACCIDENTS.			
FULL CREWS.			
SAFETY MEETING TOPIC- MAKING CONNECTION.			
FUNCTION COM FIRST CONN ON TOUR, ALL CREWS.			

06-18-2009	Reported By	BRIAN DUTTON/JESSE TATMAN									
DailyCosts: Drilling	\$33,638	Completion	\$0	Daily Total	\$33,638						
Cum Costs: Drilling	\$425,482	Completion	\$1,155	Well Total	\$426,637						
MD	6,357	TVD	6,357	Progress	879	Days	3	MW	9.8	Visc	33.0
Formation :	PBTD : 0.0		Perf :		PKR Depth : 0.0						
Activity at Report Time: LD DP @ TD 6357'											

Start	End	Hrs	Activity Description
06:00	13:30	7.5	DRILL ROTATE 5478' - 6065', 16-22K WOB, 55/135 RPM, 120 SPM, 409 GPM, 200-400 PSI DIFF, 78 FPH. MUD WT 9.9 PPG & 36 VIS.
13:30	14:00	0.5	SERVICE RIG.
14:00	01:00	11.0	DRILL ROTATE 6065' - 6357', 16-22K WOB, 55/135 RPM, 120 SPM, 409 GPM, 200-400 PSI DIFF, 27 FPH. MUD WT 10.2 PPG & 36 VIS. REACHED TD @ 11:00 HRS, 06/17/09.
01:00	02:30	1.5	CIRCULATE FOR SHORT TRIP.
02:30	03:30	1.0	WIPER TRIP, SHORT TRIP 20 JOINTS.
03:30	05:30	2.0	CIRCULATE FOR LAYING DOWN DRILL STRING.
05:30	06:00	0.5	SPOT 160 BBLs OF 12.5 PPG MUD ON BOTTOM. TOP OF PILL WITHOUT DP 3815' & 11.1 PPG EMW.

SAFETY MEETING ON OPERATING FORKLIFT & MIXING MUD.
 WEATHER IS PARTLY CLOUDY & TEMP 510.
 FULL CREWS.
 NO ACCIDENTS.
 COM OK.
 FUEL 1013 GAL.
 FORMATION BUCK CANYON.
 MUD WT 10.2 PPG & 36 VIS.

06-19-2009	Reported By	JESSE TATMAN									
Daily Costs: Drilling	\$39,065	Completion	\$116,544	Daily Total	\$155,610						
Cum Costs: Drilling	\$464,547	Completion	\$117,699	Well Total	\$582,247						
MD	6,357	TVD	6,357	Progress	0	Days	4	MW	0.0	Visc	0.0
Formation :	PBTD : 0.0			Perf :	PKR Depth : 0.0						

Activity at Report Time: RDRT/WO COMPLETION

Start	End	Hrs	Activity Description
06:00	11:30	5.5	LAYDOWN DRILL STRING.
11:30	12:00	0.5	PULL WEAR BUSHING.
12:00	13:30	1.5	RIG UP CASING CREW & HOLD SAFETY MEETING ON RUNNING CASING.
13:30	15:00	1.5	RUN 4.5", HCP-110, LTC CASING.
15:00	15:30	0.5	SERVICE RIG.
15:30	16:00	0.5	RIG REPAIR ON HYDRAULIC PUMP.
16:00	20:00	4.0	CONTINUE RUNNING CASING, 1 PUP JOINT + 154 FULL JOINTS + 2 MARKER JOINTS OF 4.5", 11.6#, HCP-110, LT&C CASING AS FOLLOWS: 1 HALLIBURTON FLOAT SHOE SET @ 6347', 1- 10' PUP JOINT OF CASING, 1 HALLIBURTON FLOAT COLLAR SET @ 6335', 23 JOINTS OF CASING, 1- 21' MARKER JOINT SET @ 5386' - 5407', 31 JOINTS OF CASING & 1- 21' MARKER JOINT SET @ 4087' - 4107', 100 JOINTS OF CASING & 1 CASING HANGER ASSEMBLY. RUN 15 TOTAL CENTRALIZERS AS FOLLOWS, 5' ABOVE SHOE ON JOINT #1 & ON TOP OF JOINT #2, THEN EVERY 2ND JOINT TO JOINT #27 @ 5224'. CONFIRMED TD WITH CASING, TAGGING AT 6357' WITH JOINT #155. SET CASING IN MANDREL HANGER WITH FULL STRING WEIGHT. (60,000# WITHOUT BLOCK WEIGHT).
20:00	21:00	1.0	CIRCULATE FOR CEMENT, RIG UP CEMENTERS & HOLD SAFETY MEETING ON CEMENTING.
21:00	23:00	2.0	RIGGED UP CEMENT HEAD, PRESSURE TESTED LINES TO 5000 PSI & CEMENT 4 1/2" PRODUCTION CASING AS FOLLOWS:PUMPED 10 BBLS FRESH WATER, PUMPED 20 BBLS MUD FLUSH SPACER, PUMPED 440 SACKS (144 BBLS) OF HIGHBOND 75 PREMIUM - CLASS G CEMENT WITH 2% BENTONITE, 2 MICROBOND, .3% VERSASET @ 12.00 PPG, 1.837 CFPS, 9.863 GPS FRESH WATER. PUMPED LEAD CEMENT @ 6 BPM & 700 PSI. PUMPED 600 SACKS (157 BBLS) EXTENDACEM (TM) SYSTEM PREMIUM - CLASS G CEMENT WITH .125 LBM/SK POLY-E-FLAKE (LOST CIRCULATION ADDITIVE), 2% BENTONITE, .75% HALAD (R)-322, 3% POTASSIUM CHLORIDE- KCL, 3 LBM SILICATE - COMPACTED, .2% WG-17, 13.50 PPG, 1.47 CFPS, 6.98 GPS FRESH WATER. PUMPED TAIL CEMENT @ 6 BPM & 230 PSI. DISPLACED WITH TOTAL OF 98 BBLS FRESH WATER. FIRST 88 BBLS DISPLACEMENT @ 6 BPM & 250-1800 PSI, 10 BBLS SHY OF BUMPING PLUG, REDUCED DISPLACEMENT RATE TO 2 BPM & 1700 PSI. BUMPED PLUG WITH 2700 PSI @ 22:45 HOURS ON 06/18/2009. CHECKED FLOATS & FLOATS HELD. FULL RETURNS & NO CEMENT TO SURFACE.
23:00	00:00	1.0	RIG DOWN CEMENTERS. LEAVE CEMENT HEAD ON CASING WITH GUAGE INSTALLED HOLDING PRESSURE @ 50 PSI FOR 1 HOUR.
00:00	01:00	1.0	BACK OUT LANDING JOINT, SET PACKOFF & TEST TO 5000 PSI FOR 15 MIN.
01:00	06:00	5.0	CLEAN MUD TANKS. NIPPLE DOWN BOP & RIG DOWN.

SAFETY MEETING ON RUNNING CASING & CEMENTING.
 FULL CREWS & NO ACCIDENTS.
 COM OK.
 TRANSFER 6 JOINTS 256.59' OF 4.5" HCP-110, 11.6#, LTC CASING TO PIPE YARD.
 TRANSFER 2 BAD JOINT 79.95', 4.5", HCP-110, 11.6# LTC CASING TO PIPE YARD.
 MOVING RIG TO VERNAL
 TRUCKS SCHEDULED FOR 06/20/2009.

06:00 RIG RELEASED @ 06:00 HRS, 06/19/2009.
 CASING POINT COST \$464,548

06-20-2009 **Reported By** JESSE TATMAN

Daily Costs: Drilling	\$85,859	Completion	\$0	Daily Total	\$85,859
Cum Costs: Drilling	\$550,407	Completion	\$117,699	Well Total	\$668,107

MD 6,357 **TVD** 6,357 **Progress** 0 **Days** 5 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: ELENBURG #28 RELEASED FROM EOG

Start	End	Hrs	Activity Description
06:00	22:00	16.0	RIG DOWN, PREPARE RIG FOR STACK OUT, RELEASED ALL RENTAL EQUIPMENT & MOVED ALL DRILL STRING TO HOWCROFT YARD IN VERNAL UTAH FOR PIPE INSPECTION.
22:00	06:00	8.0	WAIT ON DAYLIGHT.

SAFETY MEETING ON RIGGING DOWN.
 FULL CREWS & NO ACCIDENTS.
 TRUCKS SCHEDULED FOR 06/20/2009.

06:00 ELENBURG #28 RELEASED FROM EOG

06-24-2009 **Reported By** SEARLE

Daily Costs: Drilling	\$0	Completion	\$36,300	Daily Total	\$36,300
Cum Costs: Drilling	\$550,407	Completion	\$153,999	Well Total	\$704,407

MD 6,357 **TVD** 6,357 **Progress** 0 **Days** 6 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 6335.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: PREP FOR FRACS

Start	End	Hrs	Activity Description
06:00	06:00	24.0	MIRU SCHLUMBERGER WIRELINE. LOG WITH RST/CBL/CCL/VDL/GR FROM PBTD TO 450'. EST CEMENT TOP @ 650'. RDWL.

07-03-2009 **Reported By** MCCURDY

Daily Costs: Drilling	\$0	Completion	\$1,793	Daily Total	\$1,793
Cum Costs: Drilling	\$550,407	Completion	\$155,792	Well Total	\$706,200

MD 6,357 **TVD** 6,357 **Progress** 0 **Days** 7 **MW** 0.0 **Visc** 0.0

Formation : **PBTD : 6335.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: WO COMPLETION

Start	End	Hrs	Activity Description
06:00	06:00	24.0	NU 10M FRAC TREE. PRESSURE TESTED FRAC TREE & CASING TO 6500 PSIG. WO COMPLETION.

07-07-2009 Reported By MCCURDY

DailyCosts: Drilling \$0 Completion \$85,754 Daily Total \$85,754
 Cum Costs: Drilling \$550,407 Completion \$241,546 Well Total \$791,954

MD 6,357 TVD 6,357 Progress 0 Days 8 MW 0.0 Visc 0.0

Formation : WASATCH PBTD : 6335.0 Perf : 5425'-6284' PKR Depth : 0.0

Activity at Report Time: PREP TO MIRUSU

Start End Hrs Activity Description

06:00 06:00 24.0 RU CUTTERS WIRELINE & PERFORATE Ba FROM 6069'-70', 6115'-16', 6121'-22', 6125'-26', 6135'-36', 6166'-67', 6170'-71', 6186'-87', 6206'-07', 6225'-26', 6249'-50', 6283'-84' @ 3 SPF @ 120 DEGREE PHASING. RDWL. RU HALLIBURTON, FRAC DOWN CASING W/42 GAL K-87 MICROBIOCIDE, 11666 GAL 16# LINEAR W/17300# 20/40 SAND @ 1-2 PPG, 25615 GAL 16# DELTA 140 W/89800# 20/40 SAND @ 3-4 PPG. MTP 5150 PSIG. MTR 51.1 BPM. ATP 3585 PSIG. ATR 48.6 BPM. ISIP 2205 PSIG. RD HALLIBURTON.

RUWL. SET 6K CFP AT 5930'. PERFORATE Ca/Ba FROM 5803'-04', 5810'-11', 5820'-22', 5863'-64', 5871'-73', 5884'-85', 5891'-92' 5895'-96', 5899'-901' @ 3 SPF @ 120 DEGREE PHASING. RDWL. RU HALLIBURTON, FRAC DOWN CASING W/42 GAL K-87 MICROBIOCIDE, 22092 GAL 16# DELTA 140 W/78200# 20/40 SAND @ 3-4 PPG. MTP 4954 PSIG. MTR 51.1 BPM. ATP 3442 PSIG. ATR 49.7 BPM. ISIP 1753 PSIG. RD HALLIBURTON.

RUWL. SET 6K CFP AT 5590'. PERFORATE Ca FROM 5425'-27', 5429'-30', 5432'-33', 5448'-50', 5455'-56', 5464'-65', 5469'-70', 5479'-80', 5546'-48' @ 3 SPF @ 120 DEGREE PHASING. RDWL. RU HALLIBURTON, FRAC DOWN CASING W/42 GAL K-87 MICROBIOCIDE, 22635 GAL 16# DELTA 140 W/86000# 20/40 SAND @ 4 PPG. MTP 3986 PSIG. MTR 51.1 BPM. ATP 2687 PSIG. ATR 45.6 BPM. ISIP 1309 PSIG. RD HALLIBURTON.

RUWL. SET 6K CBP AT 5322'. RD CUTTERS WIRELINE.

07-11-2009 Reported By HACKING

DailyCosts: Drilling \$0 Completion \$5,600 Daily Total \$5,600
 Cum Costs: Drilling \$550,407 Completion \$247,146 Well Total \$797,554

MD 6,357 TVD 6,357 Progress 0 Days 9 MW 0.0 Visc 0.0

Formation : WASATCH PBTD : 6335.0 Perf : 5425'-6284' PKR Depth : 0.0

Activity at Report Time: P/U TUBING TO DRILL PLUG

Start End Hrs Activity Description

06:00 06:00 24.0 MIRUSU. ND FRAC TREE. NU BOP. RIH W/ BIT & PUMP OFF SUB TO 5320'. RU TO DRILL OUT PLUGS. SDFN.

07-14-2009 Reported By BAUSCH

DailyCosts: Drilling \$0 Completion \$43,735 Daily Total \$43,735
 Cum Costs: Drilling \$550,407 Completion \$290,881 Well Total \$841,289

MD 6,357 TVD 6,357 Progress 0 Days 10 MW 0.0 Visc 0.0

Formation : WASATCH PBTD : 6315.0 Perf : 5425'-6284' PKR Depth : 0.0

Activity at Report Time: RDMOSU. FLOW TEST WELL.

Start End Hrs Activity Description

07:00 06:00 23.0 SICP 0 PSIG. SISCP 0 PSIG. HOLD SAFETY MTG. PRESSURE TEST FLOW LINES & POBS TO 2500 PSIG. DRILLED OUT KILL PLUG @ 5322' LOST CIRCULATION. PUMPED 300 BLS WTR. COULD NOT GET CIRCULATION. MIRU FOAM UNIT. BLOW WELL AROUND. D/O PLUGS @ 5590' & 5930'. RIH. CLEANED OUT TO 6315' USING FOAM UNIT. RDFU. PU AND LANDED TBG AT 5408.92' KB. ND BOPE. NU TREE. RUFU. PUMPED OFF BIT & SUB. BLOW WELL AROUND. RDFU. FLOW WELL.

TUBING DETAIL

LENGTH

PUMP OFF SUB 1.00'
 1 JT 2-3/8 4.7# N-80 TBG 32.61'
 XN NIPPLE 1.30'
 165 JTS 2-3/8 4.7# N-80 TBG 5361.01'
 BELOW KB 13.00'
 LANDED @ 5408.92' KB

FLOWED 12 HRS. 32/64" CHOKE. FTP 250 PSIG, CP 500 PSIG. 17 BFPH. RECOVERED 200 BBLS, 2184 BLWTR.

07-15-2009		Reported By		BAUSCH							
DailyCosts: Drilling		\$0	Completion		\$1,960	Daily Total		\$1,960			
Cum Costs: Drilling		\$550,407	Completion		\$292,841	Well Total		\$843,249			
MD	6,357	TVD	6,357	Progress	0	Days	11	MW	0.0	Visc	0.0
Formation : WASATCH		PBTD : 6315.0			Perf : 5425'-6284'		PKR Depth : 0.0				
Activity at Report Time: FLOW TEST											
Start	End	Hrs	Activity Description								
06:00	06:00	24.0	FLOWED 24 HRS. 32/64 CHOKE. FTP 200 PSIG, CP 450 PSIG. 10 BFPH. RECOVERED 245 BBLS, 1939 BLWTR.								

07-16-2009		Reported By		BAUSCH							
DailyCosts: Drilling		\$0	Completion		\$1,960	Daily Total		\$1,960			
Cum Costs: Drilling		\$550,407	Completion		\$294,801	Well Total		\$845,209			
MD	6,357	TVD	6,357	Progress	0	Days	12	MW	0.0	Visc	0.0
Formation : WASATCH		PBTD : 6315.0			Perf : 5425'-6284'		PKR Depth : 0.0				
Activity at Report Time: WO FACILITIES											
Start	End	Hrs	Activity Description								
06:00	06:00	24.0	FLOWED 24 HRS. 16/64" CHOKE. FTP 350 PSIG. CP 475 PSIG. 2 BFPH. RECOVERED 48 BLW. 1891 BLWTR. SI. WO FACILITIES.								

FINAL COMPLETION DATE: 7/15/09

07-17-2009		Reported By		BAUSCH							
DailyCosts: Drilling		\$0	Completion		\$0	Daily Total		\$0			
Cum Costs: Drilling		\$550,407	Completion		\$294,801	Well Total		\$845,209			
MD	6,357	TVD	6,357	Progress	0	Days	13	MW	0.0	Visc	0.0
Formation : WASATCH		PBTD : 6315.0			Perf : 5425'-6284'		PKR Depth : 0.0				
Activity at Report Time: INITIAL PRODUCTION											
Start	End	Hrs	Activity Description								
06:00	06:00	24.0	INITIAL PRODUCTION. OPENING PRESSURE: TP 500 PSIG & CP 550 PSIG. TURNED WELL OVER TO KERR-MAGEE SALES AT 1:15 PM, 07/16/09. FLOWED 481 MCFD RATE ON 16/64" POS CHOKE. STATIC 240. KERR-MAGEE METER #985849.								

07-20-2009		Reported By		MICHAEL WHITE							
DailyCosts: Drilling		\$0	Completion		\$0	Daily Total		\$0			
Cum Costs: Drilling		\$550,407	Completion		\$294,801	Well Total		\$845,209			
MD	6,357	TVD	6,357	Progress	0	Days	14	MW	0.0	Visc	0.0
Formation : WASATCH		PBTD : 6315.0			Perf : 5425'-6284'		PKR Depth : 0.0				

Activity at Report Time: ON SALES

Start	End	Hrs	Activity Description
06:00	06:00	24.0	07/18/09 FLOWED 233 MCF, 0 BC & 0 BW IN 24 HRS, 16/64" CHOKE, TP 500 PSIG, CP 550 PSIG.
			07/19/09 FLOWED 247 MCF, 0 BC & 0 BW IN 24 HRS, 16/64" CHOKE, TP 450 PSIG, CP 525 PSIG.
			07/20/09 FLOWED 245 MCF, 0 BC & 0 BW IN 24 HRS, 16/64" CHOKE, TP 470 PSIG, CP 525 PSIG.

07-21-2009	Reported By	MIKE LEBARON									
Daily Costs: Drilling	\$0	Completion	\$0	Daily Total	\$0						
Cum Costs: Drilling	\$550,407	Completion	\$294,801	Well Total	\$845,209						
MD	6,357	TVD	6,357	Progress	0	Days	15	MW	0.0	Visc	0.0
Formation : WASATCH		PBTD : 6315.0		Perf : 5425'-6284'		PKR Depth : 0.0					

Activity at Report Time: ON SALES

Start	End	Hrs	Activity Description
06:00	06:00	24.0	FLOWED 230 MCF, 0 BC & 0 BW IN 24 HRS, 16/64" CHOKE, TP 475 PSIG, CP 525 PSIG.

07-22-2009	Reported By	MIKE LEBARON									
Daily Costs: Drilling	\$0	Completion	\$0	Daily Total	\$0						
Cum Costs: Drilling	\$550,407	Completion	\$294,801	Well Total	\$845,209						
MD	6,357	TVD	6,357	Progress	0	Days	16	MW	0.0	Visc	0.0
Formation : WASATCH		PBTD : 6315.0		Perf : 5425'-6284'		PKR Depth : 0.0					

Activity at Report Time: ON SALES

Start	End	Hrs	Activity Description
06:00	06:00	24.0	FLOWED 205 MCF, 0 BC & 0 BW IN 24 HRS, 16/64" CHOKE, TP 470 PSIG, CP 525 PSIG.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
UTU4485

1a. Type of Well Oil Well Gas Well Dry Other
b. Type of Completion New Well Work Over Deepen Plug Back Diff. Resvr.
Other _____

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.
NATURAL BUTTES

2. Name of Operator
EOG RESOURCES, INC. Contact: MICKENZIE THACKER
E-Mail: MICKENZIE_THACKER@EOGRESOURCES.COM

8. Lease Name and Well No.
NATURAL BUTTES UNIT 359-13E

3. Address 1060 EAST HIGHWAY 40
VERNAL, UT 84078

3a. Phone No. (include area code)
Ph: 453-781-9145

9. API Well No.
43-047-50032

4. Location of Well (Report location clearly and in accordance with Federal requirements)*
At surface SWSE 661FSL 2149FEL 39.94232 N Lat, 109.61195 W Lon
At top prod interval reported below SWSE 661FSL 2149FEL 39.94232 N Lat, 109.61195 W Lon
At total depth SWSE 661FSL 2149FEL 39.94232 N Lat, 109.61195 W Lon

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. Sec., T., R., M., or Block and Survey
or Area Sec 13 T10S R20E Mer SLB

12. County or Parish
UINTAH

13. State
UT

14. Date Spudded
05/02/2009

15. Date T.D. Reached
06/17/2009

16. Date Completed
 D & A Ready to Prod.
07/16/2009

17. Elevations (DF, KB, RT, GL)*
5160 GL

18. Total Depth: MD 6357
TVD

19. Plug Back T.D.: MD 6315
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
RST/CBL/CCL/VDL/GR

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit analysis)
Directional Survey? No Yes (Submit analysis)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12.250	9.625 J-55	36.0		2384		490		0	
7.875	4.500 HCP-110	11.6		6347		1040		650	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2.375	5409							

25. Producing Intervals

26. Perforation Record

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) WASATCH	5425	6284	6069 TO 6284		3	
B)			5803 TO 5901		3	
C)			5425 TO 5548		3	
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
6069 TO 6284	37,323 GALS OF GELLED WATER & 107,100# 20/40 SAND
5803 TO 5901	22,134 GALS OF GELLED WATER & 78,200# 20/40 SAND
5425 TO 5548	22,677 GALS OF GELLED WATER & 86,000# 20/40 SAND

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
07/16/2009	07/22/2009	24	→	0.0	205.0	0.0			FLOWS FROM WELL
Choke Size	Tbg. Press. Flwg.	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
16/64	SI 470	525.0	→	0	205	0		PGW	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg.	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
	SI		→						

(See Instructions and spaces for additional data on reverse side)

ELECTRONIC SUBMISSION #73432 VERIFIED BY THE BLM WELL INFORMATION SYSTEM

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED

RECEIVED

AUG 20 2009

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas(Sold, used for fuel, vented, etc.)
SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
WASATCH	5425	6284		GREEN RIVER BIRDS NEST MAHOGANY UTELAND BUTTE WASATCH CHAPITA WELLS BUCK CANYON	1024 1369 1935 4384 4518 5117 5829

32. Additional remarks (include plugging procedure):

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 6. Core Analysis
- 7 Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):

**Electronic Submission #73432 Verified by the BLM Well Information System.
For EOG RESOURCES, INC., sent to the Vernal**

Name (please print) MICKENZIE THACKER Title OPERATIONS CLERK

Signature  Date 08/19/2009

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Natural Buttes Unit 359-13E - ADDITIONAL REMARKS (CONTINUED):

Perforated the Ba from 6069'-70', 6115'-16', 6121'-22', 6125'-26', 6135'-36', 6166'-67', 6170'-71', 6186'-87', 6206'-07', 6225'-26', 6249'-50', 6283'-84' w/ 3 spf.

Perforated the Ca/Ba from 5802'-04', 5810'-11', 5820'-22', 5863'-64', 5871'-73', 5884'-85', 5891'-92', 5895'-96', 5899'-5901' w/ 3 spf.

Perforated the Ca from 5425'-27', 5429'-30', 5432'-33', 5448'-50', 5455'-56', 5464'-65', 5469'-70', 5479'-80', 5546'-48' w/ 3 spf.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

X Change of Operator (Well Sold)
 Operator Name Change

Designation of Agent/Operator
 Merger

ROUTING

- | |
|--------|
| 1. DJJ |
| 2. CDW |

The operator of the well(s) listed below has changed, effective: **7/1/2009**

FROM: (Old Operator): N9550-EOG Resources 1060 E Hwy 40 Vernal, UT 84078 Phone: 1-(435) 781-9111	TO: (New Operator): N2995-Kerr-McGee Oil & Gas Onshore., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

WELL NAME(S)	CA No.			Unit:			NATURAL BUTTES		
	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS	
NBU 764-32E	32	090S	210E	4304738331	2900	State	GW	P	
NBU 691-29E	29	090S	220E	4304750027	2900	State	GW	P	
NBU 359-13E	13	100S	200E	4304750032	2900	Federal	GW	P	

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: Completion of well
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: Completion of well
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- (R649-9-2) Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM n/a BIA n/a
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: n/a
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: n/a

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 8/24/2009
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 8/24/2009
- Bond information entered in RBDMS on: 8/24/2009
- Fee/State wells attached to bond in RBDMS on: 8/24/2009
- Injection Projects to new operator in RBDMS on: n/a

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: n/a
- (R649-3-1) The **NEW** operator of any state or fee well(s) listed covered by Bond Number 22013542
- The **FORMER** operator has requested a release of liability from their bond on: n/a

COMMENTS:

Well to transfer upon completion to Unit Operator (See 9/23/2003 letter from EOG & agreement 9/17/03 from Westport)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
Multiple Leases

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE – Other instructions on page 2.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EOG Resources, Inc

3a. Address
1060 EAST HIGHWAY 40, VERNAL, UT 84078

3b. Phone No. (include area code)
435-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
See Attached

7. If Unit of CA/Agreement, Name and/or No.
Natural Buttes

8. Well Name and No.
Multiple Wells

9. API Well No.
See Attached

10. Field and Pool or Exploratory Area
Natural Buttes

11. Country or Parish, State
Utah, Utah

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Change of Operator</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. has assigned all of its right, title and interest in the wells described in the attached list ("the Subject Wells") to Kerr-McGee Oil & Gas Onshore LP and will relinquish and transfer operatorship of all of the Subject Wells to Kerr-McGee Oil & Gas Onshore LP on January 1, 2010.

As of January 1, 2010, Kerr-McGee Oil & Gas Onshore LP will be considered to be the operator of each of the Subject Wells and will be responsible under the terms and conditions of the applicable lease for the operations conducted upon the leased lands. Bond coverage is provided under Kerr-McGee Oil & Gas Onshore LP's Nationwide BLM Bond No. WYB-000291.

Kerr-McGee Oil & Gas Onshore LP
1099 18th Street, Suite 1800
Denver, CO 80202-1918

Accepted by the
Utah Division of
Oil, Gas and Mining
For Record Only *ER 1/31/2010*

By: Michael A. Nixon Date: 12/17/2009
Michael A. Nixon
Agent and Attorney-in-Fact

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)
J. Michael Schween

Title Agent and Attorney-in-Fact

Signature [Signature] Date 12/17/2009

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

RECEIVED

Approved by _____ Title _____ Date **DEC 24 2009**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office **DIV. OF OIL, GAS & MINING**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Lease #	API #	Well Name	Footages	Legal Description
UTUO2270A	4304730261	NBU 1-07B	1975' FNL 1850' FWL	T10S-R21E-07-SESW
UTUO144868	4304730262	NBU 2-15B	1630' FSL 2125' FEL	T09S-R20E-15-NWSE
ML22651	4304730267	NBU 3-02B	1819' FNL 716' FWL	T10S-R22E-02-SWNW
UTUO10954A	4304730273	NBU 4-35B	2037' FNL 2539' FWL	T09S-R22E-35-SESW
ML22650	4304730272	NBU 5-36B	1023' FNL 958' FWL	T09S-R22E-36-NWNW
UTUO1791	4304730278	NBU 7-09B	330' FSL 1600' FWL	T10S-R21E-09-SESW
UTUO1207 ST	4304730274	NBU 10-29B	1100' FSL 1540' FEL	T09S-R22E-29-SWSE
UTUO1791	4304730294	NBU 13-08B	1600' FSL 1300' FEL	T10S-R21E-08-NESE
UTUO581	4304730296	NBU 15-29B	821' FNL 687' FWL	T09S-R21E-29-NWNW
UTUO1791	4304730316	NBU 16-06B	330' FSL 900' FEL	T10S-R21E-06-SESE
UTUO2270A	4304730317	NBU 17-18B	1014' FSL 2067' FEL	T10S-R21E-18-SWSE
UTUO144869	4304730328	NBU 19-21B	2015' FNL 646' FEL	T09S-R20E-21-SENE
UTUO575	4304730363	NBU 25-20B	1905' FNL 627' FWL	T09S-R21E-20-SWNW
UTU4485	4304730364	NBU 26-13B	600' FSL 661' FEL	T10S-R20E-13-SESE
UTUO1393B	4304730367	NBU 28-04B	529' FNL 2145' FWL	T10S-R21E-04-NENW
UTUO1393B	4304730368	NBU 29-05B	398' FSL 888' FWL	T10S-R21E-05-SESE
UTUO575	4304730380	NBU 30-18B	1895' FSL 685' FEL	T09S-R21E-18-NESE
ML01197A	4304730385	NBU 31-12B	565' FNL 756' FWL	T10S-R22E-12-NWNW
UTU461	4304730396	NBU 33-17B	683' FSL 739' FWL	T09S-R22E-17-SWSW
UTUO575	4304730404	NBU 34-17B	210' FNL 710' FEL	T09S-R21E-17-NENE
UTUO149767	4304730397	NBU 35-08B	1830' FNL 660' FWL	T09S-R21E-8-SWNW
UTUO144878B	4304730470	NBU 49-12B	551' FSL 1901' FEL	T09S-R20E-12-SWSE
UTUO140225	4304730473	NBU 52-01B	659' FSL 658' FEL	T09S-R21E-01-SESE
UTUO141315	4304730474	NBU 53-03B	495' FSL 601' FWL	T09S-R21E-03-SWSW
ML21510	4304730475	NBU 54-02B	660' FSL 660' FWL	T09S-R21E-02-SWSW
UTUO1193	4304730464	NBU 57-12B	676' FSL 1976' FEL	T09S-R21E-12-SWSE
UTUO1198B	4304730463	NBU 58-23B	1634' FNL 2366' FEL	T10S-R22E-23-SWNE
UTUO37167	4304730477	NBU 62-35B	760' FNL 2252' FEL	T10S-R22E-35-NWNE
UTU10186	4304730466	NBU 63-12B	1364' FNL 1358' FEL	T10S-R20E-12-SWNE
UTUO37167	4304730577	NBU 70-34B	1859' FSL 2249' FWL	T10S-R22E-34-NESW
UTU4476	4304730578	NBU 71-26B	1877' FNL 528' FEL	T10S-R20E-26-SENE
UTUO141315	4304731150	NBU 202-03	898' FSL 1580' FEL	T09S-R21E-03-SWSE
UTUO1791	4304731238	NBU 205-08	1432' FSL 1267' FWL	T10S-R21E-08-NWSW
UTUO1791	4304731165	NBU 206-09	1789' FNL 1546' FWL	T10S-R21E-09-SESW
UTUO1393B	4304731177	NBU 207-04	1366' FSL 1445' FWL	T10S-R21E-04-NESW
UTUO149076	4304731153	NBU 210-24	1000' FSL 1000' FWL	T09S-R21E-24-SWSW
UTUO284	4304731156	NBU 211-20	916' FSL 822' FEL	T09S-R22E-20-SESE
UTUO284	4304731267	NBU 212-19	289' FSL 798' FWL	T09S-R22E-19-SWSW
UTU22650	4304731268	NBU 213-36J	597' FNL 659' FEL	T09S-R22E-36-NENE
ML22651	4304731282	NBU 217-02	2045' FSL 766' FWL	T10S-R22E-02-NWSW
UTUO2270A	4304731310	NBU 218-17	2600' FNL 1500' FWL	T10S-R21E-17-SESW
UTUO149076	4304731308	NBU 219-24	1300' FNL 500' FWL	T09S-R21E-24-NWNW
UTUO149076	4304732131	NBU 301-24E	700' FSL 2450' FEL	T09S-R21E-24-SWSE
UTUO1791	4304732010	NBU 302-09E	1899' FSL 912' FWL	T10S-R21E-09-NWSW
UTUO575	4304732130	NBU 304-18E	782' FSL 1783' FEL	T09S-R21E-18-SWSE
UTUO149767	4304732135	NBU 305-07E	670' FNL 1950' FWL	T09S-R21E-07-NENW
UTUO581	4304732282	NBU 306-18E	1604' FSL 2797' FWL	T09S-R21E-18-NESW
UTUO1791	4304732014	NBU 307-06E	1979' FSL 2000' FEL	T10S-R21E-06-NWSE
UTUO284	4304732202	NBU 308-20E	1503' FSL 954' FWL	T09S-R22E-20-NWSW
UTUO575	4304732283	NBU 309-20E	930' FNL 667' FEL	T09S-R21E-20-NENE
UTUO149075	4304732203	NBU 311-23E	1101' FSL 1978' FEL	T09S-R21E-23-SWSE
UTUO581	4304732378	NBU 313-29E	1000' FNL 660' FEL	T09S-R21E-29-NENE
UTUO141315	4304732271	NBU 314-03E	1045' FSL 2584' FWL	T09S-R21E-03-SESW
UTUO575	4304732381	NBU 316-17E	1935' FNL 1067' FWL	T09S-R21E-17-SWNW
UTUO144868B	4304732362	NBU 317-12E	867' FNL 701' FEL	T09S-R20E-12-NENE
UTUO2270A	4304737511	NBU 319-17E	807' FNL 990' FWL	T10S-R21E-17-NWNW
UTUO1188	4304732379	NBU 321-10E	940' FSL 2508' FWL	T09S-R21E-10-SESW
UTUO575B	4304732376	NBU 325-08E	832' FSL 669' FWL	T09S-R21E-08-SWSW
UTUO1393B	4304733697	NBU 326-04E	1906' FNL 695' FWL	T10S-R21E-04-SWNW
UTUO1393B	4304739303	NBU 327-05E	1117' FNL 942' FEL	T10S-R21E-05-NENE (LOT 1)
UTU4485	4304732386	NBU 328-13E	1766' FSL 1944' FWL	T10S-R20E-13-NESW
UTUO1207 ST	4304732229	NBU 329-29E	2490' FNL 949' FEL	T09S-R22E-29-SENE

RECEIVED

DEC 24 2009

DIV. OF OIL, GAS & MINING

Lease #	API #	Well Name	Footages	Legal Description
UTUO10954A	4304732147	NBU 331-35E	1531' FNL 1153' FEL	T09S-R22E-35-SENE
UTUO1791	4304732148	NBU 332-08E	955' FSL 2508' FEL	T10S-R21E-08-SWSE
ML21510	4304732518	NBU 333-02E	1951' FSL 2245' FWL	T09S-R21E-02-NESW
UTUO149075	4304732265	NBU 335-23E	1419' FNL 828' FEL	T09S-R21E-23-SENE
UTUO149076	4304732264	NBU 336-24E	2024' FNL 1958' FWL	T09S-R21E-24-SENW
UTUO284	4304732281	NBU 339-19E	1890' FSL 674' FWL	T09S-R22E-19-NWSW
UTUO284B	4304732327	NBU 340-20E	1326' FSL 2569' FEL	T09S-R22E-20-NWSE
UTUO1207 ST	4304733055	NBU 341-29E	307' FSL 898' FEL	T09S-R22E-29-SESE
UTUO10954A	4304732212	NBU 342-35E	918' FNL 2563' FEL	T09S-R22E-35-NWNE
UTUO1393B	4304739338	NBU 346-05E	2233' FSL 676' FEL	T10S-R21E-05-NESE
UTUO575B	4304732326	NBU 349-07E	1641' FNL 1036' FWL	T09S-R21E-07-SWNW
UTUO1188	4304732519	NBU 352-10E	1806' FSL 842' FWL	T09S-R21E-10-NWSW
UTUO581	4304732383	NBU 356-29E	1600' FNL 1980' FEL	T09S-R21E-29-SWNE
UTUO2270A	4304732388	NBU 358-01E	736' FSL 1941' FEL	T10S-R20E-01-SWSE
UTU4485	4304750032	NBU 359-13E	661' FSL 2149' FEL	T10S-R20E-13-SWSE
UTU4485	4304732387	NBU 360-13E	1998' FSL 775' FWL	T10S-R20E-13-NWSW
ML21510	4304733782	NBU 379-02E	1967' FSL 898' FWL	T09S-R21E-02-NWSW
UTUO575	4304733064	NBU 382-18E	2030' FSL 2172' FEL	T09S-R21E-18-NWSE
UTUO149075	4304735889	NBU 384-23E	491' FSL 929' FEL	T09S-R21E-23-SESE
UTUO149076	4304733056	NBU 386-24E	450' FSL 1850' FWL	T09S-R21E-24-SESW
UTUO284	4304733057	NBU 388-19E	382' FSL 1847' FWL	T09S-R22E-19-SESW
UTUO1207 ST	4304733049	NBU 389-29E	2226' FSL 2166' FEL	T09S-R22E-29-NWSE
UTUO1393B	4304732835	NBU 390-04E	2577' FSL 1951' FWL	T10S-R21E-04-NESW
UTUO1393B	4304732988	NBU 391-05E	1215' FSL 2090' FEL	T10S-R21E-05-SWSE
UTUO1791	4304733783	NBU 392-06E	1926' FSL 611' FEL	T10S-R21E-06-NESE
UTU4485	4304733071	NBU 393-13E	1850' FSL 2141' FEL	T10S-R20E-13-NWSE
UTU4485	4304733072	NBU 394-13E	725' FSL 2027' FWL	T10S-R20E-13-SESW
UTUO1188	4304732544	NBU 400-11E	1983' FSL 1321' FWL	T09S-R21E-11-NESW
UTUO581	4304734216	NBU 421-29E	1985 FNL, 972 FEL	T09S-R21E-29-SENE
UTUO581	4304733698	NBU 422-29E	1980' FNL 785' FWL	T09S-R21E-29-SWNW
UTUO581	4304734206	NBU 423-30E	1980' FSL 660' FEL	T09S-R21E-30-NESE
ML3142	4304733699	NBU 424-32E	744' FNL 773' FEL	T09S-R21E-32-NENE
UTUO2270A	4304740049	NBU 428-07E	660' FSL 855' FWL	T10S-R21E-07-SWSW (Lot 4)
UTUO1791	4304733069	NBU 431-09E	2599' FNL 662' FWL	T10S-R21E-09-SWNW
UTUO2270A	4304738536	NBU 434-17E	1799' FNL 2176' FWL	T10S-R21E-17-SENW
UTUO2270A	4304738376	NBU 435-17E	1837' FNL 571' FWL	T10S-R21E-17-SWNW
UTUO2270A	4304734195	NBU 436-18E	1644' FSL 748' FEL	T10S-R21E-18-NESE
UTUO2270A	4304735499	NBU 437-18E	322' FSL 748' FEL	T10S-R21E-18-SESE
ML22792	4304737534	NBU 438-19E	661' FNL 1941' FEL	T10S-R21E-19-NWNE
ML22792	4304737535	NBU 439-19E	2111' FNL 1980' FWL	T10S-R21E-19-SWNE
UTUO10953	4304736279	NBU 451-01E	1965' FSL 2132' FWL	T10S-R22E-01-NESW
ML22651	4304736053	NBU 456-02E	493' FNL 1080' FWL	T10S-R22E-02-NWNW (Lot 4)
UTUO141315	4304733063	NBU 481-03E	1490' FSL 556' FEL	T09S-R21E-03-NESE
UTUO581	4304733065	NBU 483-19E	1850' FSL 1980' FWL	T09S-R21E-19-NESW
UTUO575	4304733784	NBU 484-20E	350' FNL 823' FWL	T09S-R21E-20-NWNW
UTUO2270A	4304739897	NBU 486-07E	1895 FSL' 1834' FWL	T10S-R21E-07-NESW
UTUO575B	4304733121	NBU 489-07E	763' FSL 733' FWL	T09S-R21E-07-SWSW (Lot 4)
UTUO2270A	4304733123	NBU 497-01E	2091' FSL 894' FEL	T10S-R20E-01-NESE
UTUO577A	4304733140	NBU 506-23E	720' FNL 1818' FWL	T09S-R20E-23-NENW
UTUO1791	4304733124	NBU 508-08E	915' FSL 355' FEL	T10S-R21E-08-SESE
UTUO1197A ST	4304739283	NBU 513-12EX	1850' FNL 2133' FWL	T10S-R22E-12-SENW
UTUO2270A	4304733696	NBU 516-12E	1950' FSL 1786' FEL	T10S-R20E-12-NWSE
UTUO141315	4304733779	NBU 519-03E	1749' FSL 798' FWL	T09S-R21E-03-NWSW
UTUO575B	4304733780	NBU 521-08E	2250' FSL 900' FWL	T09S-R21E-08-NWSW
UTUO1188	4304733781	NBU 522-10E	732' FSL 841' FEL	T09S-R21E-10-SESE
UTUO2270A	4304733685	NBU 523-12E	660' FSL 660' FEL	T10S-R20E-12-SESE
UTUO2270A	4304733701	NBU 524-12E	841' FSL 1795' FEL	T10S-R20E-12-SWSE
UTUO2270A	4304739722	NBU 529-07E	704' FNL 762' FWL	T10S-R21E-07-NWNW
UTUO581	4304734639	NBU 534-18E	1885' FSL 115' FWL	T09S-R21E-18-NWSW
UTUO2270A	4304735200	NBU 535-17E	1893' FSL 580' FWL	T10S-R21E-17-NWSW
ML22791	4304735252	NBU 536-18E	734' FSL 2293' FWL	T10S-R21E-18-SESW
UTUO2270A	4304735253	NBU 537-18E	1880' FSL 1830' FEL	T10S-R21E-18-NWSE

RECEIVED

DEC 24 2009

Lease #	API #	Well Name	Footages	Legal Description
UTUO284	4304735886	NBU 538-19E	1937' FSL 1833' FWL	T09S-R22E-19-NESW
UTUO149076	4304735887	NBU 539-24E	1870' FSL 477' FEL	T09S-R21E-24-NESE
UTUO10953	4304736280	NBU 546-01E	2036' FSL 699' FWL	T10S-R22E-01-NWSW
UTUO10953	4304736278	NBU 547-01E	749' FSL 598' FWL	T10S-R22E-01-SWSW
UTU474	4304737687	NBU 553-28E	767' FNL 753' FWL	T10S-R22E-28-NWNW
UTU474	4304737686	NBU 554-28E	2023' FNL 465' FWL	T10S-R22E-28-SWNW
ML22791	4304737685	NBU 555-18E	1984' FSL 1790' FWL	T10S-R21E-18-NESW
ML22791	4304737514	NBU 556-18E	1800' FSL 870' FWL	T10S-R21E-18-NWSW
ML22791	4304737513	NBU 557-18E	852' FSL 661' FWL	T10S-R21E-18-SWSW
UTUO2270A	4304737510	NBU 558-17E	748' FSL 611' FWL	T10S-R21E-17-SWSW
UTUO2278C	4304737509	NBU 559-17E	467' FSL 2065' FWL	T10S-R21E-17-SESW
UTUO2278	4304737508	NBU 560-17E	1946' FSL 1896' FWL	T10S-R21E-17-NESW
UTUO2278	4304737512	NBU 561-17E	857' FSL 1988' FEL	T10S-R21E-17-SWSE
ML22792	4304737536	NBU 562-19E	859' FNL 859' FEL	T10S-R21E-19-NENE
ML22792	4304737537	NBU 563-19E	1982' FSL 1878' FEL	T10S-R21E-19-NWSE
UTU4476	4304738962	NBU 564-26E	665' FNL 1945' FWL	T10S-R20E-26-NENW
ML22793	4304737533	NBU 565-30E	1865' FNL 1786' FEL	T10S-R21E-30-SWNE
UTUO2270A	4304738375	NBU 566-17E	538' FNL 1806' FWL	T10S-R21E-17-NENW
UTUO1791	4304738535	NBU 567-17E	690' FNL 1988' FEL	T10S-R21E-17-NWNE
UTUO1791	4304738537	NBU 568-17E	850' FNL 807' FEL	T10S-R21E-17-NENE
UTUO1791	4304738534	NBU 569-17E	2009' FNL 1809' FEL	T10S-R21E-17-SWNE
UTUO1791	4304738529	NBU 570-17E	2031' FNL 672' FEL	T10S-R21E-17-SENE
UTUO2278	4304738377	NBU 571-17E	1964' FSL 1831' FEL	T10S-R21E-17-NWSE
UTUO2278	4304738374	NBU 572-17E	1810' FSL 739' FEL	T10S-R21E-17-NESE
UTUO2278	4304738510	NBU 573-17E	813' FSL 481' FEL	T10S-R21E-17-SESE
ML22650	4304739308	NBU 602-36E	1723' FNL 719' FWL	T09S-R22E-36-SWNW
UTUO1393B	4304739305	NBU 614-05E	716' FNL 1967' FEL	T10S-R21E-05-NWNE
UTUO1393B	4304739655	NBU 615-05E	2384' FNL 1015' FEL	T10S-R21E-05-SENE
UTUO1393B	4304739337	NBU 617-04E	933' FNL 745' FWL	T10S-R21E-04-NWNW
UTUO1393B	4304739336	NBU 618-04E	998' FSL 661' FWL	T10S-R21E-04-SWSW
UTUO1393B	4304739414	NBU 625-04E	1937' FNL 1722' FWL	T10S-R21E-04-SENW
UO01197A ST	4304739192	NBU 632-12E	860' FNL 2032' FWL	T10S-R22E-12-NENW
UO01197A ST	4304739193	NBU 633-12E	789' FNL 2179' FEL	T10S-R22E-12-NWNE
UO01197A ST	4304739190	NBU 635-12E	1808' FNL 1754' FEL	T10S-R22E-12-SWNE
UTUO1197A ST	4304739191	NBU 636-12E	1824' FNL 461' FEL	T10S-R22E-12-SENE
UTUO8512 ST	4304750016	NBU 638-13E	1926' FNL 2504' FWL	T10S-R22E-13-SENW
UTUO8512 ST	4304750019	NBU 639-13E	859' FNL 1902' FEL	T10S-R22E-13-NWNE
UTUO8512 ST	4304750014	NBU 640-13E	1619' FNL 1639' FEL	T10S-R22E-13-SWNE
UTUO8512A ST	4304750058	NBU 641-13E	990' FNL 1184' FEL	T10S-R22E-13-NENE
UTUO8512 ST	4304750013	NBU 642-13E	1949' FNL 858' FEL	T10S-R22E-13-SENE
UTUO2270A	4304739957	NBU 653-07E	660' FNL 1980' FWL	T10S-R21E-07-NENW
UTUO2270A	4304739956	NBU 654-07E	1913' FNL 522' FWL	T10S-R21E-07-SWNW
UTUO2270A	4304739860	NBU 655-07E	1926' FSL 750' FWL	T10S-R21E-07-NWSW
UTUO1791	4304739856	NBU 658-01E	2177' FNL 1784' FEL	T10S-R20E-01-SWNE
UTUO2270A	4304739858	NBU 660-12E	661' FNL 691' FEL	T10S-R20E-12-NENE
ML22790	4304750011	NBU 661-24E	1734' FSL 661' FWL	T10S-R20E-24-NWSW
ML22790	4304750017	NBU 662-24E	809' FSL 807' FWL	T10S-R20E-24-SWSW
ML22790	4304750010	NBU 663-24E	810' FSL 1979' FWL	T10S-R20E-24-SESW
ML22790	4304739867	NBU 664-24E	1810' FNL 1781' FEL	T10S-R20E-24-NWSE
ML22790	4304750018	NBU 665-24E	1950' FSL 660' FEL	T10S-R20E-24-NESE
ML22790	4304750057	NBU 666-24E	1043' FSL 1722' FEL	T10S-R20E-24-SWSE
ML22790	4304750012	NBU 667-24E	660' FSL 660' FEL	T10S-R20E-24-SESE
UTUO2270A	4304739901	NBU 668-12E	859' FNL 1915' FEL	T10S-R20E-12-NWNE
UO1207 ST	4304740084	NBU 670-29E	2018' FSL 859' FEL	T09S-R22E-29-NESE
UO1207 ST	4304750027	NBU 691-29E	680' FNL 797' FEL	T09S-R22E-29-NENE
ML3140.5	4304738330	NBU 760-36E	1320' FNL 1320' FEL	T09S-R20E-36-NENE
UTU4476	4304738632	NBU 762-26E	1506' FNL 1449' FEL	T10S-R20E-26-SWNE
ML22792	4304738332	NBU 763-19E	1258' FSL 1388' FEL	T10S-R21E-19-SWSE
ML3142	4304738331	NBU 764-32E	875' FNL 667' FWL	T09S-R21E-32-NWNW
UTUO1791	4304738633	NBU 765-09E	1000' FSL 1640' FWL	T10S-R21E-09-SESW

RECEIVED

DEC 24 2009

DIV. OF OIL, GAS & MINING

